

VPort 15-M12 Series

Preliminary

EN50155 compliance, 1.3-megapixel, compact fixed dome IP cameras



- > Meets EN50155 criteria for rolling stock applications
- > Provides MPEG4 and MJPEG dual video streams simultaneously
- > Power-over-Ethernet (IEEE 802.3af) supported for less cabling and easy installation
- > Hardened M12 Ethernet connectors for high vibration environments
- > -25 to 55°C operating temperature
- > VPort SDK PLUS provided free



Introduction

The VPort 15-M12 is a 1.3 megapixel, compact, fixed-dome type IP camera that features a 1/3.8" Sony Progressive sensor for generating excellent image quality, even in low-light conditions. With an M12

connector and IP66 rain and dust protection, the VPort 15-M12 is especially suitable for high vibration and outdoor environments such as in trains and buses.

Meets EN50155's Criteria for Rolling Stock Applications

The EN50155 standard is the most basic and important requirement for electronic devices and equipment used on railway carriages. The VPort 15-M12 meets most of the criteria in EN50155:2001, such as

temperature, vibration, and shock, and is an optimal solution for video camera requirements in railway carriages.

Rugged Design for Mission-critical Industrial Environments

- -25 to 55°C wide operating temperature
- M12 Ethernet connector for high vibration environments
- Power-over-Ethernet (IEEE 802.3af) supported for less cabling and easy installation

- IP66 protection for rain and dust
- Hardened surface installation

High Resolution and High Performance Video Streams

- 1/3.8", 1.3 megapixel progressive CMOS sensor
- Simultaneous MPEG4 and MJPEG video stream (dual streams)
- Supports 1280 x 960 (4VGA, MJPEG), VGA, QVGA, CIF, QCIF resolutions

- Max. frame rates:
MPEG4: 30 FPS @ VGA, MJPEG: 15 FPS @ 1280 x 960

Specifications

Camera

Sensor: 1/3.8" Sony Progressive CMOS

Picture Elements: 1280 (H) x 960 (V), 1.3 megapixels

Lens: F1.8, focal length =4.3 mm

Angle of View: 83.1°

Camera Angle: 0-90° (Tilt and Pan)

Illumination: 0.1 Lux @ F1.8

Brightness: Manual control

Synchronization: Internal

Exposure: Auto and manual control modes

Sharpness: Manual control

Contrast: Manual control

White Balance: Auto, indoor, outdoor, manual control modes

Backlight Compensation: On/Off

Rotation: Flip, Mirror, and 180° Rotate

Horizontal Resolution: > 700TVL

Video

Video Compression: MJPEG and MPEG4 (ISO/IEC 14496-2)

Video Outputs: Via Ethernet

Video Streaming: Maximum of 2 video streams (1 MPEG4 and 1 MJPEG)

Video Resolution:

- MPEG4: VGA, QVGA, CIF, QCIF
- MJPEG: 1280 x 960 (4VGA), VGA, CIF, QVGA, QCIF

FPS (Frames per second):

- MPEG4: 30 FPS @ VGA
- MJPEG: 15 FPS @ 1280 x 960

Network

Protocols: TCP, UDP, HTTP, Multicast, SMTP, FTP, Telnet, NTP, DNS, DHCP, UPnP, RTP, RTSP, ICMP, QoS, SNMPv1/v2c/v3, DDNS
Ethernet: 1 10/100BaseT(X) M12 D-code connector

Power Requirements

Input: Power-over-Ethernet (IEEE 802.3af)

Physical Characteristics

Housing: Plastic, IP66-rated for rain and dust protection
Dimensions: 110 x 47 mm (4.3 x 1.9 in)
Installation: Surface mounting

Security

Password: User level password protection
Filtering: By IP address

Environmental Limits

Operating Temperature: -25 to 55°C (-13 to 131°F)
Storage Temperature: -40 to 85°C (-40 to 185°F)
Ambient Relative Humidity: 5 to 95% (non-condensing)

Regulatory Approvals

Safety: UL508 (Pending)
EMS:
 EN61000-4-2 (ESD), level 2
 EN61000-4-3 (RS), level 3
 EN61000-4-4 (EFT), level 3
 EN61000-4-5 (Surge), level 3
 EN61000-4-6 (CS), level 3
EMI: FCC Part 15, CISPR (EN55022) class A

Rolling Stock: EN50155 2007 compliance (Shock, Vibration, Temperature, and EMC)

Shock: IEC 60068-2-27
Freefall: IEC 60068-2-32
Vibration: IEC 60068-2-6

Note: Please check Moxa's website for the most up-to-date certification status.

Warranty

Warranty Period: 3 years
Details: See www.moxa.com/warranty

System Requirements


CPU: Pentium 4, 3 GHz or above
Memory: 1 GB memory or above
Graphics Card: AGP graphics card, 64 MB RAM
OS: Windows XP or Vista
Browser: Internet Explorer 6.x or above
Multimedia: DirectX 9.0c or above

Software Bundled Free


VPort SDK PLUS: Includes CGI commands, ActiveX Control, and API library for customized applications or system integration for third-party developers (the latest version of SDK is available for download from Moxa's website).

Note: These specifications are preliminary, and are subject to be change without notice.

Dimensions (unit = mm)



Side View

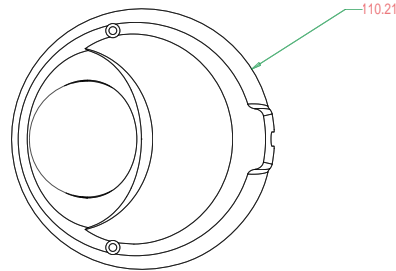

Top View

: Ordering Information

Available Models

VPort 15-M12-PAL: EN50155, 1.3 megapixel, compact fixed dome IP camera with M12 Ethernet connector, PAL modulation
VPort 15-M12-NTSC: EN50155, 1.3 megapixel, compact fixed dome IP camera with M12 Ethernet connector, NTSC modulation