

# UPort 404/407 Series

## 4 and 7-port industrial-grade USB hubs



### Features and Benefits

- Hi-Speed USB 2.0 for up to 480 Mbps USB data transmission rates
- USB-IF certification
- Dual power inputs (power jack and terminal block)
- 15 kV ESD Level 4 protection for all USB ports
- Rugged metal housing
- DIN-rail and wall-mountable
- Comprehensive diagnostic LEDs
- Chooses bus power or external power (UPort 404)

### Certifications



## Introduction

The UPort® 404 and UPort® 407 are industrial-grade USB 2.0 hubs that expand 1 USB port into 4 and 7 USB ports, respectively. The hubs are designed to provide true USB 2.0 Hi-Speed 480 Mbps data transmission rates through each port, even for heavy-load applications. The UPort® 404/407 have received USB-IF Hi-Speed certification, which is an indication that both products are reliable, high-quality USB 2.0 hubs. In addition, the hubs are fully compliant with the USB plug-and-play spec and provide a full 500 mA of power per port, ensuring that your USB devices function properly. The UPort® 404 and UPort® 407 hubs' support 12-40 VDC power, which makes them ideal for mobile applications. Externally powered USB hubs are the only way to guarantee the broadest compatibility with USB devices.

### USB-IF Certification

The UPort® 404 and UPort® 407 USB 2.0 industrial-grade USB hubs have received the USB-IF (USB Implementers Forum) certification. USB-IF verifies a number of strict electrical requirements for the high-speed USB operation of USB hubs designed to the USB 2.0 specification. This means that the UPort® 404/407 support Hi-Speed USB 2.0 for up to 480 Mbps USB transmission, which is fully compliant with interoperability requirements, has enough power for devices to function, and facilitates a smooth transition back to high-speed operation from the suspended state.

### ESD Level 4 Protection

Electrostatic discharge (ESD) could be as severe as having more than 1,000 volts of ESD with a high rise-time (dv/dt) breaking through the junction layer of protective devices. In order to avoid serious damage, Moxa's UPort® 404/407 USB hubs provide ESD Level 4 (contact 8 kV, air 15 kV) protection, which increases the quality and value of the user's end product.

## Specifications

### USB Interface

|                  |  |
|------------------|--|
| Speed            | 12 Mbps, 480 Mbps                          |
| USB Connector    | USB Type B                                 |
| USB Standards    | USB 1.1/2.0 compliant                      |
| No. of USB Ports | UPort 404 Series: 4<br>UPort 407 Series: 7 |

### Power Parameters

|               |  |
|---------------|--|
| Input Current | UPort 404 Series: 1.3 A @ 12 VDC<br>UPort 407 Series: 2.3 A @ 12 VDC |
| Input Voltage | 12 to 40 VDC   |

## Physical Characteristics

|              |   |
|--------------|---|
| Housing      | Aluminum  |
| Dimensions   | UPort 404 Series: 80 x 35 x 130 mm (3.15 x 1.38 x 5.12 in)<br>UPort 407 Series: 100 x 35 x 192 mm (3.94 x 1.38 x 7.55 in)   |
| Weight       | Packaged:<br>UPort 404 Series: 855 g (1.88 lb)<br>UPort 407 Series: 965 g (2.13 lb)<br><br>Product Only:<br>UPort 404 Series: 850 g (1.87 lb)<br>UPort 407 Series: 950 g (2.1 lb) |
| Installation | DIN-rail mounting (optional), Wall mounting (with optional kit)   |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | Standard Models: 0 to 60°C (32 to 140°F)<br>Wide Temp. Models: -40 to 85°C (-40 to 185°F)   |
| Storage Temperature (package included) | Standard Models: -20 to 75°C (-4 to 167°F)<br>Wide Temp. Models: -40 to 85°C (-40 to 185°F) |

## Standards and Certifications

|                       |   |
|-----------------------|---|
| EMC                   | EN 55032/24   |
| EMI                   | CISPR 32, FCC Part 15B Class A  |
| EMS                   | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV<br>IEC 61000-4-5 Surge: Power: 1 kV<br>IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 0 V/m<br>IEC 61000-4-8 PFMF |
| Environmental Testing | IEC 60068-2-1   |
| Safety                | UL 508  |
| Freefall              | IEC 60068-2-34  |

## Declaration

|               |                   |
|---------------|-------------------|
| Green Product | RoHS, CRoHS, WEEE |
|---------------|-------------------|

## MTBF

|           |  |
|-----------|--|
| Time      | UPort 404 Series: 1,490,340 hrs<br>UPort 407 Series: 1,111,361 hrs |
| Standards | Telcordia (Bellcore), GB   |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents


|                  |  |
|------------------|--|
| Device           | 1 x UPort 404/407 Series USB hub       |
| Installation Kit | 1 x wall-mounting kit                  |
| Cable            | 1 x USB type A male to USB type B male |

|               |   |
|---------------|---|
| Power Supply  | 1 x power adapter, universal  |
| Documentation | 1 x quick installation guide<br>1 x substance disclosure table<br>1 x warranty card |

## Dimensions


### UPort 404

Unit: mm (inch)

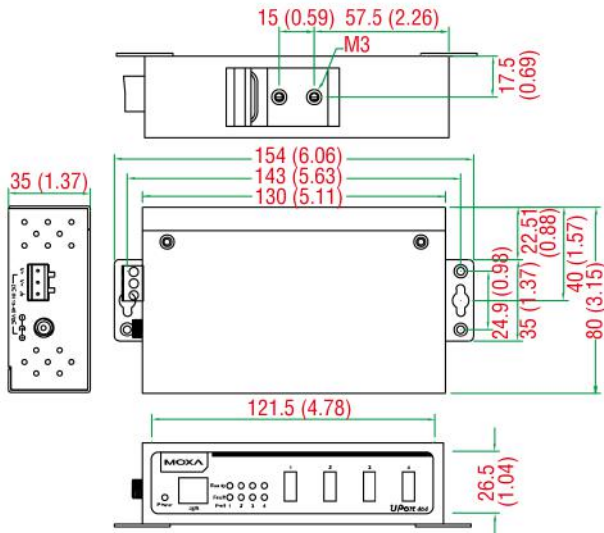

### UPort 407

Unit: mm (inch)

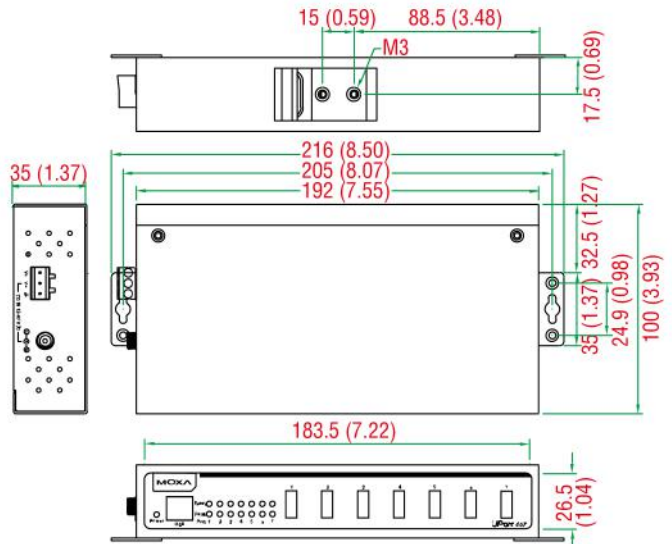

## Ordering Information

| Model Name  | USB Interface | No. of USB Ports | Housing Material | Operating Temp. | Power Adapter Included |
|-------------|---------------|------------------|------------------|-----------------|------------------------|
| UPort 404   | USB 2.0       | 4                | Aluminum         | 0 to 60°C       | ✓                      |
| UPort 407   | USB 2.0       | 7                | Aluminum         | 0 to 60°C       | ✓                      |
| UPort 404-T | USB 2.0       | 4                | Aluminum         | -40 to 85°C     | ✓                      |
| UPort 407-T | USB 2.0       | 7                | Aluminum         | -40 to 85°C     | ✓                      |

## Accessories (sold separately)

### Cables

|                |                                     |
|----------------|-------------------------------------|
| CBL-USBA/B-100 | USB Type A to USB Type B cable, 1 m |
|----------------|-------------------------------------|

### DIN-Rail Mounting Kits

|          |                                 |
|----------|---------------------------------|
| DK-25-01 | DIN-rail mounting kit, 2 screws |
|----------|---------------------------------|

### Wall-Mounting Kits

|          |  |
|----------|--|
| WK-35-02 | Wall-mount kit with two plates, 6 screws |
|----------|--|

### Power Adapters

|                   |  |
|-------------------|--|
| PWR-12300-WPAU-S1 | Locking barrel plug, 12 VDC, 3 A, 100-240 VAC, Australia (AU) plug, 0 to 40°C operating temperature          |
| PWR-12300-WPCN-S1 | Locking barrel plug, 12 VDC, 3 A, 100-240 VAC, China (CN) plug, 0 to 40°C operating temperature              |
| PWR-12300-WPEU-S1 | Locking barrel plug, 12 VDC, 3 A, 100-240 VAC, Continental Europe (EU) plug, 0 to 40°C operating temperature |

|                     |  |
|---------------------|--|
| PWR-12300-WPUK-S1   | Locking barrel plug, 12 VDC, 3 A, 100-240 VAC, United Kingdom (UK) plug, 0 to 40°C operating temperature         |
| PWR-12300-WPUSJP-S1 | Locking barrel plug, 12 VDC, 3 A, 100-240 VAC, United States/Japan (US/JP) plug, 0 to 40°C operating temperature |

© Moxa Inc. All rights reserved. Updated Jan 18, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.