

Your Trusted Partner in Automation

Moxa is a leading provider of edge connectivity, industrial computing, and network infrastructure solutions for enabling connectivity for the Industrial Internet of Things (IIoT). With over 35 years of industry experience, Moxa has connected more than 118 million devices worldwide and has a distribution and service network that reaches customers in more than 87 countries. Moxa delivers lasting business value by empowering industries with reliable networks and sincere service. Information about Moxa's solutions is available at www.moxa.com.

Moxa Americas USA

Toll Free: 1-888-MOXA-USA
Tel: +1-714-528-6777
usa@moxa.com

Moxa Europe

Tel: +49-89-413-25-73-0
europe@moxa.com

Moxa Asia-Pacific and Taiwan Asia/Taiwan

Tel: +886-2-8919-1230
Fax: +886-2-8522-8623
asia@moxa.com
taiwan@moxa.com

India

Tel: +91-80-4172-9088
Fax: +91-80-4132-1045
india@moxa.com

Korea

Tel: +82-2-6268-4048
Fax: +82-2-6268-4044
korea@moxa.com

Japan

Tel: +81-3-6721-5670
Fax: +81-3-6721-5671
japan@moxa.com

Moxa China Shanghai

Tel: +86-21-5258-9955
Fax: +86-21-5258-5505
china@moxa.com

Beijing

Tel: +86-10-5976-6123/24/25/26
Fax: +86-10-5976-6122
china@moxa.com

Shenzhen

Tel: +86-755-8368-4084/94
Fax: +86-755-8368-4148
china@moxa.com

© 2026 Moxa Inc. All rights reserved.
The MOXA logo is a registered trademark of Moxa Inc. All other logos appearing in this document are the intellectual property of the respective company, product, or organization associated with the logo.

MOXA[®]

MOXA[®]

2026 Product Selection Guide

2026 Product Selection Guide

• Network Infrastructure • Edge Connectivity • Industrial Computing

MOXA[®]

Your Trusted Partner in Automation

Providing robust connectivity technologies and superior reliability to futureproof your industrial operations



Moxa is a global leader in industrial networking and communications that enables connectivity and reliability for the automated world of today and tomorrow, and enhances cybersecurity for industrial automation systems. By working together with world-class experts and partners, we transform our customers' unique requirements into practical networking solutions for industrial applications and mission-critical infrastructure.



Providing Crucial Reliability for Critical Environments

Moxa develops reliable connectivity solutions that enable connections and communication between a wide range of automation devices, systems, and processes in challenging environments. Our solutions help customers navigate the challenges of industrial operations in an ever-changing industrial landscape, including extreme weather, cyberthreats, and hazardous environments.

With a "Built to Last" philosophy and over 35 years of experience in data connectivity for industrial automation, we have connected over 118 million devices worldwide and delivered lasting business value by empowering industries with leading-edge connectivity, industrial computing, and communication networks that define a new standard for industrial operations today and tomorrow.



Enabling Connectivity for Automation Networks

Businesses now see the added value of greater cross-system collaboration and integration when converging networks into a single-system architecture using open standards and technologies. Consequently, networking and communications in the industrial automation world have become increasingly complex—and significantly harder to manage. Backed by decades of expertise, strong values, and differentiated technical capabilities, we are uniquely positioned to accelerate the shift toward converged automation networks.

Our customers get superior value from our connectivity solutions thanks to our collaborations with industry leaders on global industrial automation projects. By ensuring reliable and secure data connectivity, our solutions help drive advanced technologies, transforming industrial automation to improve productivity and efficiency in modernized power grids, smart rail, intelligent transportation systems, smart manufacturing, oil and gas, and digitalized marine operations.



Advancing Industrial Networking and Connectivity

For over 35 years and counting, Moxa has been helping major enterprises around the world take on the challenging and complex demands of their industrial data network projects.



Forging Mobility Ahead

En route to smarter, safer transportation

In our pursuit of excellence, we have established dedicated business and R&D teams specializing in rail, marine, and intelligent transportation systems (ITS).

Our vision centers on crafting solutions that transcend the ordinary, addressing the distinctive challenges inherent to each of these demanding and dynamic environments. Embracing the mantra of "Unique Challenges, Tailored Solutions," we are committed to providing resilience in the face of cybersecurity threats, ensuring reliable and secure networks that propel us into the future.



Rail

- Co-developing rail industry standards
- 15+ years of rail experience with dedicated business and R&D teams
- 500+ dedicated rail product solutions
- 1,000+ successful deployments
- Tailored for vital and nonvital applications
- World's first IEC 62443-4-2 Security Level 2 certified onboard secure routers



Marine

- Cutting-edge solutions referencing the IEC 62443-4-2, IEC 61162, and IACS UR E26/E27 standards to create a secure foundation for maritime networks
- Solutions to help integrate ship automation and bridge systems for real-time insights to enhance operational efficiency, reliability, and safety
- Collaborating with industry leaders to expand our expertise and reinforce our commitments to maritime advancements



Intelligent Transportation Systems

- Solutions referencing IEC 62443-4-2 to ensure secure and reliable connectivity for roadside infrastructure
- Optimized network maintenance features and intuitive network management software (NMS) to support large-scale ITS deployments
- Robust connectivity solutions compliant with NEMA TS2 and E-Mark designed for advanced traffic management systems



Making Digital the New Current

OT Data Powers the Energy Transition

The global energy transition is about more than just reducing emissions. It's a race to strengthen critical infrastructure against high demand from AI, EVs, and automation. As we move away from centralized fossil fuels toward decentralized, inverter-based architectures, the grid is undergoing fundamental changes. In this new landscape, the current that powers our world is no longer just electricity—it's OT data, synchronizing and driving everything. Therefore, the grid's stability depends on millisecond-level precision and an uninterrupted balancing of supply, storage, and demand. At Moxa, we see digitalization as a new driving force, essential for navigating this complexity and advancing progress.

The Digital Backbone for a Resilient Future

Moxa architects the energy grid's digital nervous system, engineering resilient infrastructure where precision meets progress. We overcome fragmented protocols, divided systems, and unclear processes by merging legacy stability with sustainable flexibility. We've proven our expertise through expansive participation in global energy projects. Also, through our strategic roles in CIGRE, IEC working groups, UCAIug, and PAC World, we convert complex international standards into reliable, real-world deployments. Moxa's field-tested, standards-based designs, built on years of experience, enable data to empower the energy transition to fuel a smarter, more sustainable world.



9,700+

Substation network
deployments in T&D systems



48+ GWh

Energy storage systems
managed



Top 3

Cloud server companies choose
Moxa for critical power networks



80+ GW

Solar energy monitored



7 out of top 10

Global wind turbine leaders
deploy Moxa solutions

Table of Contents



	Industrial Network Infrastructure	Industrial Edge Connectivity	Industrial Computing
01 About Moxa	11 Ethernet Switches	69 Serial Device Servers	143 Industrial Computing
03 Industry Solutions	39 Secure Routers	91 Serial Converters	169 System Software
09 Table of Contents	45 Wireless AP/Bridge/Client	97 Protocol Gateways	
	53 Cellular Gateways/Routers	103 USB-to-Serial Converters/USB Hubs	173 Accessories
	57 Ethernet Media Converters	107 Multiport Serial Boards	
	63 Network Management Software	115 Controllers & I/Os	
	65 Secure Remote Access	135 OPC UA Software	
	67 Network Security Appliance	137 IP Cameras & Video Servers	

Ethernet Switches

Moxa provides a wide range of industrial Ethernet switches that feature industrial-grade reliability, network redundancy, strengthened security, easy management, and competitive price-to-performance ratios. Our comprehensive portfolio includes unmanaged switches, managed switches, PoE switches, rackmount switches, and EN 50155 switches designed for use in the rail industry.



Ethernet Switches
Product Pages



13

Unmanaged Switches

Moxa has a large portfolio of industrial unmanaged switches that have been specifically designed for industrial Ethernet infrastructure. Our unmanaged Ethernet switches uphold the stringent standards required for operational reliability in harsh environments.



16

DIN-rail Managed Switches

Our DIN-rail managed switches feature industrial-grade reliability, network redundancy, and a selection of IEC 62443-4-2 Security Level 2 certified models. Moxa's compact DIN-rail managed switches have a variety of copper and fiber port combinations that provide customers with greater flexibility when deploying networks.



24

Rackmount Managed Switches

Moxa's industrial rackmount switches deliver 24- to 64-port modular flexibility, combining advanced routing and up to 10GbE switching. Robust built-in security features and IEC 62443-4-2 Security Level 2 models help protect critical assets, while millisecond-level fast multicast redundancy maximizes network availability. These capabilities make them ideal for strengthening IIoT infrastructures across power, transportation, manufacturing, and surveillance applications.



30

PoE Switches

We provide a wide range of PoE/PoE+/PoE++ switches with up to 90 W output per port to deliver high-speed data transmissions while powering high-power devices over long distances. With an industrial-grade design, our PoE switches provide surge protection of up to 4 kV per LAN port. Additionally, Smart PoE management features simplify PoE network deployment and maintenance.



33

EN 50155 Ethernet Switches

Moxa is an IRIS certified company that offers a large portfolio of rugged Ethernet switches that comply with the EN 50155 standard. These products have been deployed in numerous rail and metro systems around the world. With our innovative solutions and technologies, we help train builders achieve overall transportation safety and efficiency while saving cost and time for railway operations and maintenance.



38

Two-wire Ethernet Switches (SPE/APL)

Our single-pair Ethernet (SPE) and Ethernet-APL switches target field applications like process automation, leveraging 10BASE-T1L to deliver power and data over a single twisted-pair cable (with PoDL support for SPE). These switches simplify both cabling and network architecture while extending Ethernet to the field, seamlessly connecting field instruments to the control center for a truly unified IT/OT network.

Unmanaged Switches



Product Series	EDS-G2008-EL	EDS-G2008-ELP	EDS-G2005-EL	EDS-G2005-ELP	EDS-2008-EL	EDS-2008-ELP	EDS-2005-EL	EDS-2005-ELP
Ethernet Interface								
Max. Number of Ports	8	8	5	5	8	8	5	5
10/100/1000BaseT(X) Ports (RJ45 Connector)	8	8	5	5	-	-	-	-
10/100BaseT(X) Ports (RJ45 Connector)	-	-	-	-	Up to 8	8	5	5
100BaseFX Ports (Multi-mode SC Connector)	-	-	-	-	Up to 1	-	-	-
100BaseFX Ports (Multi-mode ST Connector)	-	-	-	-	Up to 1	-	-	-
DIP Switch Configuration								
Ethernet Interface	Quality of Service (QoS), Broadcast Storm Protection (BSP)							
Industrial Protocols								
PROFINET ¹	✓	✓	✓	✓	✓	✓	✓	✓
Input Voltage								
12/24/48 VDC	✓	✓	✓	✓	✓	✓	✓	✓
Installation Options								
DIN-rail Mounting	✓	✓	✓	✓	✓	✓	✓	✓
Wall Mounting (With Optional Kit)	✓	✓	✓	✓	✓	✓	✓	✓
Environmental Limits								
-10 to 60°C (14 to 140°F)	✓	✓	✓	✓	✓	✓	✓	✓
-40 to 75°C (-40 to 167°F)	✓	-	✓	-	✓	-	✓	-
Standards and Certifications								
EMI	CISPR 32, FCC Part 15B Class A							
Safety	UL 61010-2-201, EN 62368-1							

¹ Compliant with PROFINET Conformance Class A.

Unmanaged Switches



Product Series	EDS-2018-ML	EDS-2016-ML	EDS-2010-ML	EDS-G205	EDS-208A	EDS-205A	EDS-208	EDS-205
Ethernet Interface								
Max. Number of Ports	18	16	10	5	8	5	8	5
10/100/1000BaseT(X) Ports (RJ45 Connector)	-	-	-	4	-	-	-	-
10/100BaseT(X) Ports (RJ45 Connector)	16	Up to 16	8	-	Up to 8	Up to 5	Up to 8	5
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+)	2	-	2	1	-	-	-	-
100BaseFX Ports (Multi-mode SC Connector)	-	Up to 2	-	-	Up to 2	Up to 1	Up to 1	-
100BaseFX Ports (Multi-mode ST Connector)	-	Up to 2	-	-	Up to 2	Up to 1	Up to 1	-
100BaseFX Ports (Single-mode SC Connector)	-	Up to 2	-	-	Up to 2	Up to 1	-	-
DIP Switch Configuration								
Ethernet Interface	Quality of Service (QoS), Broadcast Storm Protection (BSP), Port break alarm			Broadcast Storm Protection (BSP), Jumbo Frame, IEEE 802.3az energy saving, 100/1000 SFP speed switching, Port break alarm	Broadcast Storm Protection (BSP)	Quality of Service (QoS), Broadcast Storm Protection (BSP)	-	
Industrial Protocols								
PROFINET ¹	-	-	-	-	-	✓	-	-
Alarm Contact Channels								
1 Relay Output With Current Carrying Capacity of 1 A @ 24 VDC	✓	✓	✓	✓	-	-	-	-
Input Voltage								
24 VAC	-	-	-	-	-	-	✓	✓
12/24/48 VDC	✓	✓	✓	✓	✓	✓	✓	✓
Installation Options								
DIN-rail Mounting	✓	✓	✓	✓	✓	✓	✓	✓
Wall Mounting (With Optional Kit)	✓	✓	✓	✓	✓	✓	-	-
Environmental Limits								
-10 to 60°C (14 to 140°F)	✓	✓	✓	✓	✓	✓	✓	✓
-40 to 75°C (-40 to 167°F)	✓	✓	✓	✓	✓	✓	-	-
Standards and Certifications								
EMI	CISPR 32, FCC Part 15B Class A							
Safety	UL 61010-2-201, EN 62368-1			UL 508, EN 62368-1		UL 61010-2-201, IEC 62368-1, EN IEC 62368-1	UL 508, EN 62368-1	UL 61010-2-201, EN 62368-1
Hazardous Locations	ATEX, CID2, IECEx			ATEX, CID2		ATEX, CID2, IECEx		-
Railway	EN 50121-4							
Traffic Control	NEMA TS2			-		NEMA TS2		-
Maritime	ABS, DNV, LR, NK							

¹ Compliant with PROFINET Conformance Class A.

Unmanaged Switches



Product Series	EDS-G308	EDS-316	EDS-309	EDS-308	EDS-305
Ethernet Interface					
Max. Number of Ports	8	16	9	8	5
10/100/1000BaseT(X) Ports (RJ45 Connector)	Up to 8	–	–	–	–
10/100BaseT(X) Ports (RJ45 Connector)	–	Up to 16	6	Up to 8	Up to 5
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+)	Up to 2	–	–	–	–
100BaseFX Ports (Multi-mode SC Connector)	–	Up to 2	Up to 3	Up to 2	Up to 1
100BaseFX Ports (Multi-mode ST Connector)	–	Up to 2	Up to 3	Up to 2	Up to 1
100BaseFX Ports (Single-mode SC Connector)	–	Up to 2	–	Up to 2	Up to 1
100BaseFX Ports (Single-mode SC Connector, 80 km)	–	Up to 2	–	Up to 2	Up to 1
DIP Switch Configuration					
Ethernet Interface	Broadcast Storm Protection (BSP), Jumbo Frame, IEEE 802.3az energy saving, Port break alarm		Port break alarm		
Alarm Contact Channels					
1 Relay Output With Current Carrying Capacity of 1 A @ 24 VDC	✓	✓	✓	✓	✓
Input Voltage					
12/24/48 VDC	✓	✓	✓	✓	✓
Installation Options					
DIN-rail Mounting	✓	✓	✓	✓	✓
Wall Mounting (With Optional Kit)	✓	✓	✓	✓	✓
Environmental Limits					
-10 to 60°C (14 to 140°F)	✓	✓	✓	✓	✓
-40 to 75°C (-40 to 167°F)	✓	✓	✓	✓	✓
Standards and Certifications					
EMI	CISPR 32, FCC Part 15B Class A				
Safety	UL 508, EN 62368-1	UL 508, UL 60950-1, CSA C22.2 No. 60950-1, EN 62368-1		UL 61010-2-201, IEC 62368-1, EN IEC 62368-1	
Hazardous Locations	ATEX, CID2	ATEX, CID2, IECEx	ATEX, CID2		ATEX, CID2, IECEx
Railway	EN 50121-4	–			
Maritime	ABS, DNV, LR, NK	DNV			

DIN-rail Managed Switches



Product Series	EDS-G4014	EDS-G4012	EDS-G4008	EDS-4014	EDS-4012	EDS-4009	EDS-4008
Ethernet Interface							
Max. Number of Ports	14	12	8	14	12	9	8
10/100/1000BaseT(X) Ports (RJ45 Connector)	8	Up to 8	8	–	–	–	Up to 2
10/100BaseT(X) Ports (RJ45 Connector)	–	–	–	8	Up to 8	6	Up to 8
1000/2500BaseSFP Ports	6	Up to 4	–	2	–	–	–
100/1000BaseSFP Ports	–	–	–	4	Up to 4	–	Up to 2
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP)	–	Up to 4	–	–	Up to 4	–	–
100BaseFX Ports (ST or SC Connector)	–	–	–	–	–	3	Up to 2
PoE Ports (10/100/1000BaseT(X), RJ45 Connector)	–	Up to 8	–	–	Up to 8	–	Up to 4
Filter							
802.1p Class of Service	✓	✓	✓	✓	✓	✓	✓
802.1Q VLAN	✓	✓	✓	✓	✓	✓	✓
IGMP v1/v2/v3 Snooping	✓	✓	✓	✓	✓	✓	✓
Industrial Protocols							
EtherNet/IP	✓	✓	✓	✓	✓	✓	✓
Modbus TCP	✓	✓	✓	✓	✓	✓	✓
PROFINET	✓	✓	✓	✓	✓	✓	✓
MMS	✓	✓	✓	✓	✓	✓	✓
Management							
DHCP Relay Agent (Option 82)	✓	✓	✓	✓	✓	✓	✓
Port Mirroring	✓	✓	✓	✓	✓	✓	✓
RMON/SNMPv1/v2c/v3	✓	✓	✓	✓	✓	✓	✓
Fiber Check	✓	✓	✓	✓	✓	✓	✓
Telnet/SSH	✓	✓	✓	✓	✓	✓	✓
TFTP	✓	✓	✓	✓	✓	✓	✓
Redundancy Protocols							
STP/RSTP/MSTP	✓	✓	✓	✓	✓	✓	✓
MRP	✓	✓	✓	✓	✓	✓	✓
Turbo Ring/Turbo Chain	✓	✓	✓	✓	✓	✓	✓
Security							
HTTPS/SSL	✓	✓	✓	✓	✓	✓	✓
TACACS+/RADIUS	✓	✓	✓	✓	✓	✓	✓
MAC Authentication Bypass	✓	✓	✓	✓	✓	✓	✓
IEEE 802.1X	✓	✓	✓	✓	✓	✓	✓
MAC Sticky	✓	✓	✓	✓	✓	✓	✓
Access Control List	✓	✓	✓	✓	✓	✓	✓
Time Management							
IEEE 1588v2 PTP (Hardware-based)	✓	✓	✓	✓	✓	✓	✓
Power Parameters							
Input Voltage	The input voltage depends on the installed PWR-100 Power Module Series model. Refer to the Modular Power Supplies section (pg 190) for more information.						
Physical Characteristics							
Installation	DIN-rail mounting, Wall mounting (with optional kit)						
Environmental Limits							
Operating Temperature	Standard models: -10 to 60°C (14 to 140°F), Wide temp. models: -40 to 75°C (-40 to 167°F)						
Standards and Certifications							
EMI	CISPR 32, FCC Part 15B Class A						
Safety	UL 61010-2-201, EN 62368-1						
Hazardous Locations	-LV/-LV-T models: ATEX, CID2, IECEx						
Railway	EN 50121-4						
Traffic Control	NEMA TS2						
Power Substation	IEC 61850-3, IEEE 1613 Class 1						
Maritime	-LV/-LV-T, -LVB/-LVB-T models: DNV, ABS, NK, LR						
Cybersecurity	IEC 62443-4-2 Security Level 2						

DIN-rail Managed Switches



Product Series	EDS-G516E	EDS-G512E	EDS-G508E	EDS-528E	EDS-518E	EDS-510E
Ethernet Interface						
Max. Number of Ports	16	12	8	28	18	10
10/100/1000BaseT(X) Ports (RJ45 Connector)	12	Up to 8	8	-	-	-
10/100BaseT(X) Ports (RJ45 Connector)	-	-	-	24	Up to 14	7
100/1000BaseSFP Ports	4	4	-	-	-	-
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP)	-	-	-	4	4	3
100BaseFX Ports (ST or SC Connector)	-	-	-	-	Up to 2	-
PoE Ports (10/100/1000BaseT(X), RJ45 Connector)	-	Up to 8	-	-	-	-
Filter						
802.1p Class of Service	✓	✓	✓	✓	✓	✓
802.1Q VLAN	✓	✓	✓	✓	✓	✓
IGMP v1/v2/v3 Snooping	✓	✓	✓	✓	✓	✓
Industrial Protocols						
EtherNet/IP	✓	✓	✓	✓	✓	✓
Modbus TCP	✓	✓	✓	✓	✓	✓
PROFINET	✓	✓	✓	✓	✓	✓
Management						
DHCP Relay Agent (Option 82)	✓	✓	✓	✓	✓	✓
Port Mirroring	✓	✓	✓	✓	✓	✓
RMON/SNMPv1/v2c/v3	✓	✓	✓	✓	✓	✓
Syslog	✓	✓	✓	✓	✓	✓
Fiber Check	✓	✓	✓	✓	✓	✓
Telnet/SSH	✓	✓	✓	✓	✓	✓
TFTP	✓	✓	✓	✓	✓	✓
Redundancy Protocols						
STP/RSTP/MSTP	✓	✓	✓	✓	✓	✓
MRP	✓	✓	✓	✓	✓	✓
Turbo Ring/Turbo Chain	✓	✓	✓	✓	✓	✓
Security						
HTTPS/SSL	✓	✓	✓	✓	✓	✓
TACACS+/RADIUS	✓	✓	✓	✓	✓	✓
MAC Authentication Bypass	✓	✓	✓	✓	✓	-
IEEE 802.1X	✓	✓	✓	✓	✓	✓
MAC Sticky	✓	✓	✓	✓	✓	✓
Access Control List	✓	✓	✓	✓	✓	-
Power Parameters						
Input Voltage	12/24/48/-48 VDC Redundant dual inputs	Non-PoE models: 12/24/48/-48 VDC PoE models: 48 VDC Redundant dual inputs	12/24/48/-48 VDC Redundant dual inputs	-LV models: 12/24/48/-48 VDC Redundant dual inputs -HV models: 110/220 VDC/VAC Single input	12/24/48/-48 VDC Redundant dual inputs	
Physical Characteristics						
Installation	DIN-rail mounting, Wall mounting (with optional kit)					
Environmental Limits						
Operating Temperature	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)					
Standards and Certifications						
EMI	CISPR 32, FCC Part 15B Class A					
Safety	UL 508	All models: UL 508 PoE models: EN 62368-1	UL 508	UL 61010-2-201, EN 62368-1	UL 508	
Hazardous Locations	ATEX, CID2	Non-PoE models: ATEX, CID2	ATEX, CID2	-	ATEX, CID2	
Railway	EN 50121-4			-	EN 50121-4	
Traffic Control	-	NEMA TS2		-	NEMA TS2	
Power Substation	IEC 61850-3, IEEE 1613					
Maritime	ABS, DNV, LR, NK	Non-PoE models: ABS, DNV, LR, NK	ABS, DNV, LR, NK	-	ABS, DNV, LR, NK	

DIN-rail Managed Switches



Product Series	EDS-G509	EDS-510A	EDS-508A	EDS-505A	EDS-408A	EDS-405A
Ethernet Interface						
Max. Number of Ports	9	10	8	5	8	5
10/100/1000BaseT(X) Ports (RJ45 Connector)	4	Up to 3	-	-	-	-
10/100BaseT(X) Ports (RJ45 Connector)	-	7	Up to 8	Up to 5	Up to 8	Up to 5
100/1000BaseSFP Ports	-	Up to 3	-	-	-	-
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP)	5	-	-	-	-	-
100BaseFX Ports (ST or SC Connector)	-	-	Up to 2	Up to 2	Up to 3	Up to 2
Filter						
802.1p Class of Service	✓	✓	✓	✓	✓	✓
802.1Q VLAN	✓	✓	✓	✓	✓	✓
IGMP v1/v2 Snooping	✓	✓	✓	✓	✓	✓
Industrial Protocols						
EtherNet/IP	✓	✓	✓	✓	✓	✓
Modbus TCP	✓	✓	✓	✓	✓	✓
PROFINET	-	-	-	-	PN models	PN models
Management						
DHCP Relay Agent (Option 82)	✓	✓	✓	✓	✓	✓
Port Mirroring	✓	✓	✓	✓	✓	✓
RMON/SNMPv1/v2c/v3	✓	✓	✓	✓	✓	✓
Syslog	✓	✓	✓	✓	✓	✓
Fiber Check	✓	✓	-	-	-	-
Telnet/SSH	✓	✓	✓	✓	✓	✓
TFTP	✓	✓	✓	✓	✓	✓
Redundancy Protocols						
STP/RSTP/MSTP	✓	✓	✓	✓	✓	✓
MRP	-	-	-	-	-	-
Turbo Ring/Turbo Chain	✓	✓	✓	✓	✓	✓
Security						
HTTPS/SSL	✓	✓	✓	✓	✓	✓
TACACS+/RADIUS	✓	✓	✓	✓	-	-
MAC Authentication Bypass	-	-	-	-	-	-
IEEE 802.1X	✓	✓	✓	✓	-	-
MAC Sticky	-	-	-	-	-	-
Access Control List	-	-	-	-	-	-
Power Parameters						
Input Voltage	12/24/48 VDC Redundant dual inputs	24 VDC Redundant dual inputs	12/24/48 VDC Redundant dual inputs	12/24/48 VDC Redundant dual inputs	EDS-408A-3S-3C-48(-T) models: ±24/±48 VDC Other models: 12/24/48 VDC Redundant dual inputs	12/24/48 VDC Redundant dual inputs
Physical Characteristics						
Installation	DIN-rail mounting, Wall mounting (with optional kit)					
Environmental Limits						
Operating Temperature	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)		Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)			
Standards and Certifications						
EMI	CISPR 32, FCC Part 15B Class A					
Safety	UL 508, EN 62368-1	EN 62368-1, UL 60950-1, UL 508			All models: UL 508 EDS-408A, EDS-408A-MM-SC/MM-ST/SS-SC/EIP/PN models: UL 60950-1, EN 62368-1	All models: UL 508 Non-PTP models: ATEX, CID2, EN 62368-1
Hazardous Locations	-	ATEX, CID2			EDS-408A, EDS-408A-MM-SC/MM-ST/SS-SC/EIP/PN models: ATEX, CID2, IECEx	Non-PTP models: ATEX, CID2
Railway	EN 50121-4		-	-	EN 50121-4	Non-PTP models: EN 50121-4
Traffic Control	-	NEMA TS2		-	-	Non-PTP models: NEMA TS2
Maritime	ABS, DNV, LR, NK	DNV			All models (excluding EDS-408A-3S-SC-48(-T)): DNV, NK, LR EDS-408A, EDS-408A-MM-SC/MM-ST/SS-SC/EIP/PN models: ABS	Non-PTP models: DNV, LR

DIN-rail Managed Switches



Product Series	SDS-G3016	SDS-G3010	SDS-G3008	SDS-G3006	SDS-3016	SDS-3010	SDS-3008	SDS-3006
Ethernet Interface								
Max. Number of Ports	16	10	8	6	16	10	8	6
10/100/1000BaseT(X) Ports (RJ45 Connector)	Up to 16	Up to 8	8	Up to 6	Up to 2	-	-	-
10/100BaseT(X) Ports (RJ45 Connector)	-	-	-	-	Up to 16	Up to 8	8	Up to 6
100/1000BaseSFP Ports	Up to 2	-	-	-	Up to 2	-	-	-
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP)	-	2	-	Up to 2	-	2	-	Up to 2
PoE Ports (10/100BaseT(X), 10/100/1000BaseT(X), RJ45 Connector)	-	Up to 8	-	Up to 4	-	Up to 8	-	Up to 4
Filter								
802.1p Class of Service	Fixed profiles							
802.1Q VLAN	✓	✓	✓	✓	✓	✓	✓	✓
IGMP v1/v2/v3 Snooping	Enabled via EtherNet/IP function							
Industrial Protocols								
EtherNet/IP	✓	✓	✓	✓	✓	✓	✓	✓
Modbus TCP	✓	✓	✓	✓	✓	✓	✓	✓
PROFINET	✓	✓	✓	✓	✓	✓	✓	✓
Management								
DHCP Relay Agent (Option 82)	-	-	-	-	-	-	-	-
Port Mirroring	✓	✓	✓	✓	✓	✓	✓	✓
RMON/SNMPv1/v2c/v3	✓	✓	✓	✓	✓	✓	✓	✓
Syslog	✓	✓	✓	✓	✓	✓	✓	✓
Fiber Check	✓	✓	✓	✓	✓	✓	✓	✓
Telnet/SSH	-	-	-	-	-	-	-	-
TFTP	✓	✓	✓	✓	✓	✓	✓	✓
Redundancy Protocols								
STP/RSTP	✓	✓	✓	✓	✓	✓	✓	✓
MSTP	-	-	-	-	-	-	-	-
MRP	✓	✓	✓	✓	✓	✓	✓	✓
Turbo Ring/Turbo Chain	-	-	-	-	-	-	-	-
Security								
HTTPS/SSL	HTTPS only							
TACACS+/RADIUS	-	-	-	-	-	-	-	-
MAC Authentication Bypass	-	-	-	-	-	-	-	-
IEEE 802.1X	-	-	-	-	-	-	-	-
MAC Sticky	-	-	-	-	-	-	-	-
Access Control List	-	-	-	-	-	-	-	-
Power Parameters								
Input Voltage	SDS-(G)3010-8PoE-2GTXSFP models: 48 VDC All other models: 12/24/48 VDC Redundant dual inputs							
Physical Characteristics								
Installation	DIN-rail mounting, Wall mounting (with optional kit)							
Environmental Limits								
Operating Temperature	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)							
Standards and Certifications								
EMI	CISPR 32, FCC Part 15B Class A							
Safety	UL 61010-2-201, EN IEC 62368-1							

DIN-rail Managed Switches



Product Series	TSN-G5004	TSN-G5008	TSN-G5016
Ethernet Interface			
Max. Number of Ports	4	8	16
10/100/1000BaseT(X) Ports (RJ45 Connector)	4	6	12
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP)	-	2	-
1000BaseSFP Ports	-	-	-4GS models: 4
10GBaseSFP Ports	-	-	-4XGS models: 4
Filter			
802.1p Class of Service	✓	✓	✓
802.1Q VLAN	✓	✓	✓
IGMP v1/v2/v3 Snooping	-	-	-
Industrial Protocols			
EtherNet/IP	-	-	-
Modbus TCP	-	-	-
PROFINET	-	-	-
Management			
DHCP Relay Agent (Option 82)	-	-	-
Port Mirroring	✓	✓	✓
RMON	-	-	-
SNMPv1/v2c/v3	✓	✓	✓
Syslog	✓	✓	✓
Fiber Check	-	-	-
Telnet/SSH	✓	✓	✓
TFTP	✓	✓	✓
Redundancy Protocols			
STP/RSTP	✓	✓	✓
MSTP	-	-	-
MRP	-	-	-
Turbo Ring/Turbo Chain	Turbo Chain only		
Security			
HTTPS/SSL	✓	✓	✓
TACACS+/RADIUS	✓	✓	✓
MAC Authentication Bypass	-	-	-
IEEE 802.1X	-	-	-
MAC Sticky	-	-	-
Access Control List	-	-	-
Time Management			
IEEE 1588v2 PTP (Hardware-based)	✓	✓	✓
IEEE 802.1 AS	✓	✓	✓
IEEE 802.1 Qbv	✓	✓	✓
Power Parameters			
Input Voltage	12 to 48 VDC, Redundant dual inputs		
Physical Characteristics			
Installation	DIN-rail mounting, Wall mounting (with optional kit)		
Environmental Limits			
Operating Temperature	-10 to 60°C (14 to 140°F)		-40 to 70°C (-40 to 158°F)
Standards and Certifications			
EMI	CISPR 32, FCC Part 15B Class A		
Safety	UL 61010-2-201, EN 62368-1		

DIN-rail Managed Switches



Product Series	MDS-G4028-4XGS	MDS-G4020-4XGS	MDS-G4012-4XGS	MDS-G4028	MDS-G4020	MDS-G4012
Ethernet Interface						
Max. Number of Ports	28	20	12	28	20	12
10GbE SFP+ Slots	4	4	4	-	-	-
10/100/1000BaseT(X) or 1000BaseSFP Ports	Up to 24	Up to 16	Up to 8	Up to 28 (up to 24 SFP ports)	Up to 20 (up to 16 SFP ports)	Up to 12 (up to 8 SFP ports)
Modular Ports (10/100BaseT(X) or 100BaseSFP)	Up to 24	Up to 16	Up to 8	Up to 24	Up to 16	Up to 8
Filter						
802.1p Class of Service	✓	✓	✓	✓	✓	✓
802.1Q VLAN	✓	✓	✓	✓	✓	✓
IGMP v1/v2/v3 Snooping	✓	✓	✓	✓	✓	✓
Industrial Protocols						
EtherNet/IP/Modbus TCP/MMS	✓	✓	✓	✓	✓	✓
Management						
Layer 3 Switching	L3 models					
DHCP Relay Agent (Option 82)	✓	✓	✓	✓	✓	✓
Port Mirroring (SPAN/RSPAN)	✓	✓	✓	✓	✓	✓
RMON/SNMPv1/v2c/v3	✓	✓	✓	✓	✓	✓
Syslog	✓	✓	✓	✓	✓	✓
Fiber Check	✓	✓	✓	✓	✓	✓
Telnet/SSH	✓	✓	✓	✓	✓	✓
Redundancy Protocols						
PRP/HSR	✓	✓	✓	✓	✓	✓
STP/RSTP/MSTP	✓	✓	✓	✓	✓	✓
MRP	✓	✓	✓	✓	✓	✓
Turbo Ring/Turbo Chain	✓	✓	✓	✓	✓	✓
Security						
HTTPS/SSL	✓	✓	✓	✓	✓	✓
TACACS+/RADIUS	✓	✓	✓	✓	✓	✓
MAC Sticky	✓	✓	✓	✓	✓	✓
MAC Authentication Bypass	✓	✓	✓	✓	✓	✓
IEEE 802.1X	✓	✓	✓	✓	✓	✓
Access Control List	✓	✓	✓	✓	✓	✓
DHCP Snooping	✓	✓	✓	✓	✓	✓
Dynamic ARP Inspection	✓	✓	✓	✓	✓	✓
IP Source Guard	✓	✓	✓	✓	✓	✓
Time Management						
IEEE 1588v2 PTP (Hardware-based)	✓	✓	✓	✓	✓	✓
Power Parameters						
Input Voltage	The input voltage depends on the installed PWR(-A) Power Module Series model. Refer to the Modular Power Supplies section (pg 190) for more information.					
Physical Characteristics						
Installation	DIN-rail mounting, Wall mounting (with optional kit), Rack mounting (with optional kit)					
Environmental Limits						
Operating Temperature	-40 to 75°C (-40 to 167°F)			Standard models: -10 to 60°C (14 to 140°F), Wide temp. models: -40 to 75°C (-40 to 167°F)		
Standards and Certifications						
EMI	CISPR 32, FCC Part 15B Class A					
Safety	EN IEC 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1, UL 61010-2-201, EN 61010-2-201			EN IEC 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1		
Hazardous Locations	-			ATEX, CID2		
Railway	EN 50121-4					
Traffic Control	NEMA TS2					
Power Substation	IEC 61850-3, IEEE 1613					

DIN-rail Managed Switches



Product Series	EDS-619	EDS-616	EDS-611	EDS-608	CM-600 Modules
Ethernet Interface					
Max. Number of Ports	19	16	11	8	-
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP)	3	-	3	-	-
Modular Ports (10/100BaseT(X), RJ45 Connector)	Up to 16	Up to 16	Up to 8	Up to 8	CM-600-3MSC/1TX: 1 CM-600-3SSC/1TX: 1 CM-600-4TX: 4 CM-600-2MSC/2TX: 2 CM-600-2SSC/2TX: 2
Modular Ports (100BaseFX)	Up to 16	Up to 16	Up to 8	Up to 8	CM-600-3MSC/1TX: 3 CM-600-2MSC/2TX: 3 CM-600-4MST: 4 CM-600-4MSC: 4 CM-600-4SSC: 4 CM-600-2MSC/2TX: 2 CM-600-2SSC/2TX: 2
Filter					
802.1p Class of Service	✓	✓	✓	✓	-
802.1Q VLAN	✓	✓	✓	✓	-
IGMP v1/v2 Snooping	✓	✓	✓	✓	-
Industrial Protocols					
EtherNet/IP	✓	✓	✓	✓	-
Modbus TCP	✓	✓	✓	✓	-
Management					
DHCP Relay Agent (Option 82)	✓	✓	✓	✓	-
Port Mirroring	✓	✓	✓	✓	-
RMON/SNMPv1/v2c/v3	✓	✓	✓	✓	-
Syslog	✓	✓	✓	✓	-
Fiber Check	✓	-	✓	-	-
Telnet/SSH	✓	✓	✓	✓	-
TFTP	✓	✓	✓	✓	-
Redundancy Protocols					
STP/RSTP/MSTP	✓	✓	✓	✓	-
Turbo Ring/Turbo Chain	✓	✓	✓	✓	-
Security					
HTTPS/SSL	✓	✓	✓	✓	-
TACACS+/RADIUS	✓	✓	✓	✓	-
802.1X	✓	✓	✓	✓	-
Power Parameters					
Input Voltage	12/24/48 VDC, Redundant dual inputs				-
Physical Characteristics					
Installation	DIN-rail mounting, Wall mounting (with optional kit)				-
Environmental Limits					
Operating Temperature	Standard models: 0 to 60°C (32 to 140°F), Wide temp. models: -40 to 75°C (-40 to 167°F)				
Standards and Certifications					
EMI	CISPR 32, FCC Part 15B Class A				-
Safety	EN 62368-1, UL 508				-
Hazardous Locations	ATEX, CID2				-
Railway	EN 50121-4				-
Traffic Control	NEMA TS2				-
Maritime	ABS, DNV, LR, NK				-

DIN-rail Managed Switches



Product Series	PT-G510	PT-G503	PT-510	PT-508
Ethernet Interface				
Max. Number of Ports	10	3	10	8
10/100/1000BaseT(X) Ports (RJ45 Connector)	Up to 8	-	-	-
100/1000BaseSFP Slots	Up to 10	-	-	-
10/100BaseT(X) Ports (RJ45 Connector)	-	-	Up to 8	6
100BaseFX Ports	-	-	Up to 4	2
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+)	-	3	-	-
Filter				
IGMP v1/v2/v3	✓	-	v1, v2 only	v1, v2 only
802.1Q VLAN	✓	✓ (VLAN unaware)	✓ (Port-based VLAN, VLAN unaware)	✓ (Port-based VLAN, VLAN unaware)
GVRP	✓	-	✓	✓
Management				
DHCP Relay Agent (Option 82)	✓	✓	✓	✓
Port Mirroring	✓	✓	✓	✓
SNMPv1/v2c/v3	✓	✓	✓	✓
LLDP	✓	✓	✓	✓
Fiber Check	✓	✓	-	-
Telnet	✓	✓	✓	✓
TFTP	✓	-	✓	✓
HTTP	✓	✓	✓	✓
Syslog	✓	✓	✓	✓
IPv4/IPv6	✓	✓	✓	✓
Redundancy Protocols				
STP/RSTP/MSTP	✓	-	✓	✓
MRP	✓	-	-	-
Turbo Ring/Turbo Chain	✓	-	✓	✓
PRP/HSR	✓	✓	-	-
Security				
TACACS+/RADIUS	✓	✓	✓	✓
SSH	✓	✓	✓	✓
Port Lock	✓	-	✓	✓
MAC Sticky	✓	-	-	-
Broadcast Storm Protection	✓	-	-	-
MAC Authentication Bypass	✓	-	-	-
Access Control List	✓	-	-	-
Time Management				
SNTP, NTP Server/Client	✓	✓	✓	✓
IEEE 1588v2 PTP (Hardware-based)	✓	✓	-	-
Power Parameters				
Input Voltage	24/48 VDC, 110/220 VDC/VAC, Redundant dual inputs		24/48 VDC, 110/220 VDC/VAC	
Environmental Limits				
Operating Temperature	-40 to 75°C (-40 to 167°F)	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F) ¹	
Standards and Certifications				
EMI	CISPR 32, FCC Part 15B Class A			
Safety	IEC 62368-1, UL 62368-1		UL 508	
Railway	EN 50121-4			
Maritime	-WV models: IEC 60945			
Power Substation	IEC 61850-3 Edition 2.0 Class 2, IEEE 1613		IEC 61850-3, IEEE 1613	

¹ Cold starting the device at -40°C requires at least 100 VAC.

Rackmount Managed Switches



Product Series	MRX-Q4064 Modular Switch	MRX-G4064 Modular Switch	XM-4000 Modules Modules for MRX-Q4064/G4064
Ethernet Interface			
Max. Number of Ports	64	64	-
10GbE SFP+ Slots	16	8	-
Modular Ports (1000/2500BaseT(X) or 1000/2500BaseSFP)	Up to 48	-	XM-4000-16QGTx/-16QGSFP: 16
1000BaseT(X) or 1000BaseSFP Ports	Up to 48	Up to 56	XM-4000-16GTx/-16GSFP: 16
Filter			
IGMP v1/v2/v3	✓	✓	-
802.1p Class of Service	✓	✓	-
802.1Q VLAN	✓	✓	-
Industrial Protocols			
EtherNet/IP/Modbus TCP ¹	✓	✓	-
PROFINET ¹	✓	✓	-
Management			
Layer 3 Switching	✓	✓	-
Port Mirroring (SPAN/RSPAN)	✓	✓	-
RMON/SNMPv1/v2c/v3	✓	✓	-
LLDP	✓	✓	-
Fiber Check ¹	✓	✓	-
Telnet/SSH	✓	✓	-
TFTP	✓	✓	-
Redundancy Protocols			
STP/RSTP/MSTP	✓	✓	-
MRP ¹	✓	✓	-
Turbo Ring/Turbo Chain ²	✓	✓	-
ERPS	✓	✓	-
Security			
HTTPS/SSL	✓	✓	-
TACACS+/RADIUS	✓	✓	-
MAC Sticky	✓	✓	-
MAC Authentication Bypass ¹	✓	✓	-
IEEE 802.1X	✓	✓	-
Access Control List	✓	✓	-
DHCP Snooping ¹	✓	✓	-
Dynamic ARP Inspection ¹	✓	✓	-
IP Source Guard ¹	✓	✓	-
Time Management			
IEEE 1588v2 PTP (Hardware-based)	✓	✓	-
Power Parameters			
Input Voltage	230 to 240 VDC; 100 to 240 VAC, 50 to 60 Hz (using the PWR-300 Series, see pg 190)		-
Physical Characteristics			
Installation	Rack mounting		
Environmental Limits			
Operating Temperature	-10 to 60°C (14 to 140°F)		
Standards and Certifications			
EMI	CISPR 32, FCC Part 15B Class A		
Safety	EN 62368-1, UL 61010, IEC 62368-1, UL 62368-1		
Railway	EN 50121-4		

¹ Available in Q2, 2026.

² Turbo Ring is supported; Turbo Chain is available in Q2, 2026.

Rackmount Managed Switches



Product Series	ICS-G7852A	ICS-G7850A	ICS-G7848A	ICS-G7752A	ICS-G7750A	ICS-G7748A	IM-G7000A Modules
	Modular Switch	Modular Switch	Modular Switch	Modular Switch	Modular Switch	Modular Switch	Modules for ICS-G7700A/G7800A
Ethernet Interface							
Max. Number of Ports	52	50	48	52	50	48	-
10GbE SFP+ Slots	4	2	-	4	2	-	-
Modular Ports (10/100/1000BaseT(X), RJ45 Connector)	Up to 48	Up to 48	Up to 48	Up to 48	Up to 48	Up to 48	IM-G7000A-4GTX: 4 IM-G7000A-4PoE: 4 (PoE)
Modular Ports (100/1000BaseSFP)	Up to 48	Up to 48	Up to 48	Up to 48	Up to 48	Up to 48	IM-G7000A-4GSFP: 4
Filter							
IGMP v1/v2/v3	✓	✓	✓	✓	✓	✓	-
802.1p Class of Service	✓	✓	✓	✓	✓	✓	-
802.1Q VLAN	✓	✓	✓	✓	✓	✓	-
Industrial Protocols							
EtherNet/IP	✓	✓	✓	✓	✓	✓	-
Modbus TCP	✓	✓	✓	✓	✓	✓	-
Management							
Layer 3 Switching	✓	✓	✓	-	-	-	-
DHCP Relay Agent (Option 82)	✓	✓	✓	✓	✓	✓	-
Port Mirroring	✓	✓	✓	✓	✓	✓	-
RMON/SNMPv1/v2c/v3	✓	✓	✓	✓	✓	✓	-
LLDP	✓	✓	✓	✓	✓	✓	-
Fiber Check	✓	✓	✓	✓	✓	✓	-
Telnet/SSH	✓	✓	✓	✓	✓	✓	-
TFTP	✓	✓	✓	✓	✓	✓	-
Redundancy Protocols							
STP/RSTP/MSTP	✓	✓	✓	✓	✓	✓	-
MRP	✓	✓	✓	✓	✓	✓	-
Turbo Ring/Turbo Chain	✓	✓	✓	✓	✓	✓	-
Security							
HTTPS/SSL	✓	✓	✓	✓	✓	✓	-
TACACS+/RADIUS	✓	✓	✓	✓	✓	✓	-
MAC Sticky	✓	✓	✓	✓	✓	✓	-
MAC Authentication Bypass	✓	✓	✓	✓	✓	✓	-
IEEE 802.1X	✓	✓	✓	✓	✓	✓	-
Access Control List	✓	✓	✓	✓	✓	✓	-
Power Parameters							
Input Voltage	110 to 220 VAC, Redundant dual inputs						-
Physical Characteristics							
Installation	Rack mounting						-
Environmental Limits							
Operating Temperature	-10 to 60°C (14 to 140°F)						-
Standards and Certifications							
EMI	CISPR 32, FCC Part 15B Class A						-
Safety	EN 61010-2-201, UL 61010-2-201						-
Railway	EN 50121-4						-

Rackmount Managed Switches



Product Series	ICS-G7828A	ICS-G7826A	ICS-G7528A	ICS-G7526A
Ethernet Interface				
Max. Number of Ports	28	26	28	26
10GbE SFP+ Slots	4	2	4	2
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+)	4	4	4	4
10/100/1000BaseT(X) Ports (RJ45 Connector) or 100/1000BaseSFP Slots	20	20	20	20
Filter				
IGMP v1/v2/v3	✓	✓	✓	✓
802.1p Class of Service	✓	✓	✓	✓
802.1Q VLAN	✓	✓	✓	✓
Industrial Protocols				
EtherNet/IP	✓	✓	✓	✓
Modbus TCP	✓	✓	✓	✓
PROFINET	✓	✓	✓	✓
Management				
Layer 3 Switching	✓	✓	-	-
DHCP Relay Agent (Option 82)	✓	✓	✓	✓
Port Mirroring	✓	✓	✓	✓
RMON/SNMPv1/v2c/v3	✓	✓	✓	✓
LLDP	✓	✓	✓	✓
Fiber Check	✓	✓	✓	✓
Telnet/SSH	✓	✓	✓	✓
TFTP	✓	✓	✓	✓
Redundancy Protocols				
STP/RSTP/MSTP	✓	✓	✓	✓
MRP	✓	✓	✓	✓
Turbo Ring/Turbo Chain	✓	✓	✓	✓
Security				
HTTPS/SSL	✓	✓	✓	✓
TACACS+/RADIUS	✓	✓	✓	✓
MAC Sticky	✓	✓	✓	✓
MAC Authentication Bypass	✓	✓	✓	✓
IEEE 802.1X	✓	✓	✓	✓
Access Control List	✓	✓	✓	✓
Power Parameters				
Input Voltage	100 to 240 VAC, Redundant dual inputs			
Physical Characteristics				
Installation	Rack mounting			
Environmental Limits				
Operating Temperature	-40 to 75°C (-40 to 167°F)			
Standards and Certifications				
EMI	CISPR 32, FCC Part 15B Class A			
Safety	UL 61010-2-201, EN 61010-2-201, UL 62368-1, IEC 62368-1			
Railway	EN 50121-4			
Traffic Control	NEMA TS2			

Rackmount Managed Switches



Product Series	RKS-G4028 Modular Switch	RM-G4000 Modules Modules for RKS-G4028	IKS-G6824A Switch	IKS-G6524A Switch
Ethernet Interface				
Max. Number of Ports	28	-	24	24
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+)	-	-	4	4
10/100/1000BaseT(X) Ports (RJ45 Connector)	Up to 28	RM-G4000-8GPoE/-GTX: 8	Up to 20	Up to 20
Modular Ports (10/100BaseT(X), RJ45 Connector)	Up to 24	RM-G4000-4MSC2TX/-4SSC2TX/-4MST2TX: 2 RM-G4000-2MST4TX/-2SSC4TX/-2MSC4TX: 4 RM-G4000-8TX/-8PoE: 8 RM-G4000-2MSC4TX: 4	-	-
100/1000BaseSFP Ports	Up to 28	RM-G4000-8GSFP: 8	Up to 20	Up to 20
Modular Ports (100BaseSFP)	Up to 24	RM-G4000-8SFP: 8	-	-
Modular Ports (100BaseFX)	Up to 18	RM-G4000-2MST4TX/-2SSC4TX/-2MSC4TX: 2 RM-G4000-4MSC2TX/-4SSC2TX/-4MST2TX: 4 RM-G4000-6SSC/-6MSC/-6MST: 6	-	-
Filter				
IGMP v1/v2/v3	✓	-	✓	✓
802.1p Class of Service	✓	-	✓	✓
802.1Q VLAN	✓	-	✓	✓
Industrial Protocols				
EtherNet/IP/Modbus TCP	✓	-	✓	✓
PROFINET	✓	-	✓	✓
MMS	✓	-	-	-
Management				
Layer 3 Switching	L3 models	-	✓	-
DHCP Relay Agent (Option 82)	✓	-	✓	✓
Port Mirroring	✓	-	✓	✓
RMON/SNMPv1/v2c/v3	✓	-	✓	✓
LLDP	✓	-	✓	✓
Fiber Check	✓	-	✓	✓
Telnet/SSH	✓	-	✓	✓
TFTP	✓	-	✓	✓
Redundancy Protocols				
STP/RSTP/MSTP	✓	-	✓	✓
MRP	✓	-	✓	✓
Turbo Ring/Turbo Chain	✓	-	✓	✓
Security				
HTTPS/SSL	✓	-	✓	✓
TACACS+/RADIUS	✓	-	✓	✓
MAC Sticky	✓	-	✓	✓
MAC Authentication Bypass	✓	-	✓	✓
IEEE 802.1X	✓	-	✓	✓
Access Control List	✓	-	✓	✓
DHCP Snooping	✓	-	-	-
Dynamic ARP Inspection	✓	-	-	-
IP Source Guard	✓	-	-	-
Time Management				
IEEE 1588v2 PTP (Hardware-based)	✓	-	-	-
Power Parameters				
Input Voltage	24/48 VDC, 110/220 VAC, 110/220 VDC, Redundant power supplies PoE models: 48 VDC	-	110 to 240 VAC, Redundant power supplies	
Physical Characteristics				
Installation	Rack mounting	-	Rack mounting	
Environmental Limits				
Operating Temperature	-40 to 75°C (-40 to 167°F)	-	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	
Standards and Certifications				
EMI	CISPR 32, FCC Part 15B Class A	-	CISPR 32, FCC Part 15B Class A	
Safety	EN IEC 62368-1, IEC 60950-1, IEC 62368-1, UL 61010, UL 62368-1	-	UL 62368-1, IEC 62368-1, UL 61010-2-201, EN 61010-2-201	
Railway	EN 50121-4	-	EN 50121-4	
Traffic Control	NEMA TS2	-	NEMA TS2	
Power Substation	IEC 61850-3, IEEE 1613	-	-	-
Cybersecurity	IEC 62443-4-2 Security Level 2	-	-	-

Rackmount Managed Switches



Product Series	IKS-6728A Modular Switch	IKS-6726A Modular Switch	IM-6700A Modules Modules for IKS-6700A
Ethernet Interface			
Max. Number of Ports	28	26	-
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+)	4	2	-
10/100BaseT(X) Ports (RJ45 Connector)	Up to 24	Up to 24	IM-6700A-2MSC4TX/-2MST4TX/-2SSC4TX: 4 IM-6700A-4MST2TX/-4SSC2TX/-4MSC2TX: 2 IM-6700A-8TX/-8PoE: 8
Modular Ports (100BaseSFP)	Up to 16	Up to 16	IM-6700A-8SFP: 8
Modular Ports (100BaseFX)	Up to 12	Up to 12	IM-6700A-2MSC4TX/-2MST4TX/-2SSC4TX: 2 IM-6700A-4MST2TX/-4SSC2TX/-4MSC2TX: 4 IM-6700A-6MSC/-6SSC/-6MST: 6
Filter			
IGMP v1/v2/v3	✓	✓	-
802.1p Class of Service	✓	✓	-
802.1Q VLAN	✓	✓	-
Industrial Protocols			
EtherNet/IP/Modbus TCP	✓	✓	-
PROFINET	✓	✓	-
Management			
Layer 3 Switching	-	-	-
DHCP Relay Agent (Option 82)	✓	✓	-
Port Mirroring	✓	✓	-
RMON/SNMPv1/v2c/v3	✓	✓	-
LLDP	✓	✓	-
Fiber Check	✓	✓	-
Telnet/SSH	✓	✓	-
TFTP	✓	✓	-
Redundancy Protocols			
STP/RSTP/MSTP	✓	✓	-
MRP	✓	✓	-
Turbo Ring/Turbo Chain	✓	✓	-
Security			
HTTPS/SSL	✓	✓	-
TACACS+/RADIUS	✓	✓	-
MAC Sticky	✓	✓	-
MAC Authentication Bypass	✓	✓	-
IEEE 802.1X	✓	✓	-
Access Control List	✓	✓	-
Power Parameters			
Input Voltage	24 VDC, 48 VDC, 110/220 VAC, Redundant dual inputs		-
Physical Characteristics			
Installation	Rack mounting		-
Environmental Limits			
Operating Temperature	-40 to 75°C (-40 to 167°F)		-
Standards and Certifications			
EMI	CISPR 32, FCC Part 15B Class A		-
Safety	EN 60950-1, UL 60950-1		-
Railway	EN 50121-4		-
Maritime	Non-PoE models: ABS, CCS, DNV, LR, NK	ABS, DNV, LR, NK	-

Rackmount Managed Switches



Product Series	PT-G7828	PT-G7728	LM-7000H Modules	PT-7528	PM-7500 Modules
	Modular Switch	Modular Switch	Modules for PT-G7000/ MDS-G4000(-4XGS)	Switch With Module Slot	Modules for PT-7528
Ethernet Interface					
Max. Number of Ports	28	28	-	28	-
10/100/1000BaseT(X) Ports (RJ45 Connector)	Up to 26	Up to 26	LM-7000H-4GTX: 4	-	-
100/1000BaseSFP Slots	Up to 26	Up to 26	LM-7000H-4GSFP: 4	Up to 4 (1000BaseSFP slots only)	-
10/100BaseT(X) Ports (RJ45 Connector)	Up to 26	Up to 26	LM-7000H-4TX: 4	Up to 24	-
100BaseFX Ports (SC or ST Connector)	-	-	-	Up to 20	PM-7500-2MSC/-2MST/-2SSC: 2 PM-7500-4MSC/-4MST/-4SSC: 4
Combo Ports (100/1000BaseT(X) PRP/HSR or 100/1000BaseSFP PRP/HSR)	-	Up to 2	LM-7000H-2GPHR: 2	-	-
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+)	-	-	-	-	PM-7500-2GTXSFP: 2 PM-7500-4GTXSFP: 4
PoE Ports (10/100BaseT(X), RJ45 Connector)	-	-	LM-7000H-4PoE: 4 ¹	-	-
PoE Ports (100/1000BaseT(X), RJ45 Connector)	-	-	LM-7000H-4GPoE: 4 ¹	-	-
Filter					
IGMP v1/v2/v3	✓	✓	-	✓	-
802.1p Class of Service	✓	✓	-	✓	-
802.1Q VLAN	✓	✓	-	✓	-
Management					
Layer 3 Switching	✓	-	-	-	-
DHCP Relay Agent (Option 82)	✓	✓	-	✓	-
Port Mirroring	✓	✓	-	✓	-
SNMPv1/v2c/v3	✓	✓	-	✓	-
LLDP	✓	✓	-	✓	-
Fiber Check	✓	✓	-	✓	-
Telnet	✓	✓	-	✓	-
TFTP	✓	✓	-	✓	-
Dying Gasp	✓	✓	-	-	-
Redundancy Protocols					
STP/RSTP/MSTP	✓	✓	-	✓	-
MRP	-	✓	-	-	-
Turbo Ring/Turbo Chain	✓	✓	-	✓	-
PRP/HSR	-	✓	-	-	-
Security					
TACACS+/RADIUS	✓	✓	-	✓	-
Port Lock	✓	✓	-	✓	-
MAC Sticky	✓	✓	-	-	-
Broadcast Storm Protection	✓	✓	-	✓	-
MAC Authentication Bypass	✓	✓	-	-	-
Access Control List	✓	✓	-	-	-
Time Management					
SNTP, NTP Server/Client	✓	✓	-	✓	-
IEEE 1588v2 PTP (Hardware-based)	✓	✓	-	-	-
Power Parameters					
24/48 VDC	✓	✓	-	✓	-
110/220 VDC/VAC	✓	✓	-	✓	-
Power Module Slots	2 (hot-swappable)	2 (hot-swappable)	-	-	-
Environmental Limits					
Operating Temperature	-40 to 85°C (-40 to 185°F) ² With LM-7000H-2GPHR module installed: -40 to 75°C (-40 to 167°F)				
Standards and Certifications					
EMI	CISPR 32, FCC Part 15B Class A		-	CISPR 32, FCC Part 15B Class A	
Safety	IEC 62368-1, UL 62368-1		-	UL 508	
Railway	EN 50121-4		-	EN 50121-4	
Power Substation	IEC 61850-3 Edition 2.0 Class 2, IEEE 1613		-	IEC 61850-3, IEEE 1613	

¹ LM-7000H-4PoE/-4GPoE HW rev 2.0.0 modules support the PT-G7728/7827 Series and MDS-G4000(-4XGS) Series. HW rev 3.0.0 modules only support the MDS-G4000(-4XGS) Series.
² Cold starting the device at -40°C requires at least 100 VAC (for PT-7528 Series only).

PoE Switches



Product Series	RKS-G4028-PoE	IKS-6728A-8PoE	EDS-G4012-8P	EDS-4012-8P	EDS-4008-4P	EDS-G512E-8PoE	EDS-P510A-8PoE	EDS-P506E-4PoE	
Ethernet Interface									
Max. Number of Ports	28	28	12	12	8	12	10	6	
PoE Ports (10/100/1000BaseT(X), RJ45 Connector)	Up to 24	-	8	-	-	8	-	-	
PoE Ports (10/100BaseT(X), RJ45 Connector)	Up to 24	Up to 24	-	8	4	-	8	4	
Filter									
802.1p Class of Service	✓	✓	✓	✓	✓	✓	✓	✓	
802.1Q VLAN	✓	✓	✓	✓	✓	✓	✓	✓	
IGMP v1/v2/v3 Snooping	✓	✓	✓	✓	✓	✓	v1/v2 only	✓	
Industrial Protocols									
EtherNet/IP/Modbus TCP	✓	✓	✓	✓	✓	✓	✓	✓	
PROFINET	✓	✓	✓	✓	✓	✓	-	✓	
MMS	✓	-	-	-	-	-	-	-	
Management									
DHCP Relay Agent (Option 82)	✓	✓	✓	✓	✓	✓	✓	✓	
Port Mirroring	✓	✓	✓	✓	✓	✓	✓	✓	
RMON/SNMPv1/v2c/v3	✓	✓	✓	✓	✓	✓	✓	✓	
Syslog	✓	✓	✓	✓	✓	✓	✓	✓	
Fiber Check	✓	✓	✓	✓	✓	✓	✓	✓	
Telnet/SSH	✓	✓	✓	✓	✓	✓	✓	✓	
TFTP	✓	✓	✓	✓	✓	✓	✓	✓	
Redundancy Protocols									
STP/RSTP/MSTP	✓	✓	✓	✓	✓	✓	✓	✓	
MRP	✓	✓	✓	✓	✓	✓	-	✓	
Turbo Ring/Turbo Chain	✓	✓	✓	✓	✓	✓	✓	✓	
Security									
HTTPS/SSL	✓	✓	✓	✓	✓	✓	✓	✓	
TACACS+/RADIUS	✓	✓	✓	✓	✓	✓	✓	✓	
MAC Authentication Bypass	✓	✓	✓	✓	✓	✓	-	✓	
IEEE 802.1X	✓	✓	✓	✓	✓	✓	✓	✓	
MAC Sticky	✓	✓	✓	✓	✓	✓	-	✓	
Access Control List	✓	✓	✓	✓	✓	✓	-	✓	
Power Over Ethernet									
IEEE 802.3af/at	✓	✓	✓	✓	✓	✓	✓	✓	
IEEE 802.3bt	✓	-	✓	✓	✓	-	-	-	
Force Mode	✓	✓	✓	✓	✓	✓	✓	✓	
Total Power Budget (Max.)	300 W	720 W	240 W	240 W	240 W	240 W	240 W	180 W	
Each PoE Port (Max.)	90 W	36 W	90 W	90 W	90 W	36 W	36 W	60 W	
Input Voltage									
12/24/48 VDC	-	-	-LVB/-LVB-T models			-	-	✓	
48 VDC	✓	✓	-LVA/-LVA-T models			✓	✓	-	
Physical Characteristics									
Installation	Rack mounting			DIN-rail mounting, Wall mounting (with optional kit)					
Operating Temperature									
-10 to 60°C (14 to 140°F)	-	✓	✓	✓	✓	✓	✓	✓	
-40 to 75°C (-40 to 167°F)	✓	✓	✓	✓	✓	✓	✓	✓	
Standards and Certifications									
EMI	CISPR 32, FCC Part 15B Class A					FCC Part 15B Class A	CISPR 32, FCC Part 15B Class A		
Safety	EN IEC 62368-1, IEC 60950-1, IEC 62368-1, UL 61010, UL 62368-1	EN 60950-1, UL 60950-1	UL 61010-2-201, EN 62368-1			UL 508, EN 62368-1	UL 508	UL 61010-2-201, EN 61010-2-201	
Hazardous Locations	-							CID2	-
Railway	EN 50121-4								
Traffic Control	NEMA TS2	-	NEMA TS2						
Power Substation	IEC 61850-3, IEEE 1613	-	IEC 61850-3, IEEE 1613 Class 1			IEC 61850-3, IEEE 1613	-	IEC 61850-3, IEEE 1613	
Maritime	-	-LVB/-LVB-T models: ABS, DNV, LR, NK					-		

PoE Switches



Product Series	SDS-G3010-8PoE	SDS-G3006-4PoE	SDS-3010-8PoE	SDS-3006-4PoE	EDS-G205A-4PoE	EDS-P206A-4PoE
Ethernet Interface						
Max. Number of Ports	10	6	10	6	5	6
PoE Ports (10/100/1000BaseT(X), RJ45 Connector)	8	4	-	-	4	-
PoE Ports (10/100BaseT(X), RJ45 Connector)	-	-	8	4	-	4
Filter						
802.1p Class of Service	Fixed Profiles				-	-
802.1Q VLAN	✓	✓	✓	✓	-	-
IGMP v1/v2/v3 Snooping	Enabled via EtherNet/IP function				-	-
Industrial Protocols						
EtherNet/IP	✓	✓	✓	✓	-	-
Modbus TCP	✓	✓	✓	✓	-	-
PROFINET	✓	✓	✓	✓	-	-
Management						
Port Mirroring	✓	✓	✓	✓	-	-
RMON/SNMPv1/v2c/v3	✓	✓	✓	✓	-	-
Syslog	✓	✓	✓	✓	-	-
Fiber Check	✓	✓	✓	✓	-	-
TFTP	✓	✓	✓	✓	-	-
Redundancy Protocols						
STP/RSTP	✓	✓	✓	✓	-	-
MRP	✓	✓	✓	✓	-	-
Security						
HTTPS	✓	✓	✓	✓	-	-
Power Over Ethernet						
IEEE 802.3af/at	✓	✓	✓	✓	✓	✓
Force Mode	✓	✓	✓	✓	-	-
Total Power Budget (Max.)	240 W	120 W	240 W	120 W	144 W	120 W
Each PoE Port (Max.)	36 W	36 W	36 W	36 W	36 W	30 W
Power Parameters						
12/24/48 VDC	-	✓	-	✓	✓	✓
48 VDC	✓	-	✓	-	-	-
Physical Characteristics						
Installation	DIN-rail mounting, Wall mounting (with optional kit)					
Operating Temperature						
0 to 60°C (32 to 140°F)	-	-	-	-	✓	-
-10 to 60°C (14 to 140°F)	✓	✓	✓	✓	-	✓
-40 to 75°C (-40 to 167°F)	✓	✓	✓	✓	✓	✓
Standards and Certifications						
EMI	CISPR 32, FCC Part 15B Class A					
Safety	UL 61010-2-201, EN IEC 62368-1			UL 508, EN 62368-1		UL 508
Railway	-			EN 50121-4		-

PoE Switches



Product Series	MDS-G4028-4XGS	MDS-G4020-4XGS	MDS-G4012-4XGS	MDS-G4028	MDS-G4020	MDS-G4012
Ethernet Interface						
Max. Number of Ports	28	20	12	28	20	12
10GbE SFP+ Slots	4	4	4	-	-	-
PoE Ports (10/100/1000BaseT(X), RJ45 Connector)	Up to 24	Up to 16	Up to 8	Up to 24	Up to 16	Up to 8
PoE Ports (10/100BaseT(X), RJ45 Connector)	Up to 24	Up to 16	Up to 8	Up to 24	Up to 16	Up to 8
Filter						
802.1p Class of Service	✓	✓	✓	✓	✓	✓
802.1Q VLAN	✓	✓	✓	✓	✓	✓
IGMP v1/v2/v3 Snooping	✓	✓	✓	✓	✓	✓
Industrial Protocols						
EtherNet/IP/Modbus TCP/MMS	✓	✓	✓	✓	✓	✓
Management						
Layer 3 Switching	L3 models only					
DHCP Relay Agent (Option 82)	✓	✓	✓	✓	✓	✓
Port Mirroring	✓	✓	✓	✓	✓	✓
RMON/SNMPv1/v2c/v3	✓	✓	✓	✓	✓	✓
Syslog	✓	✓	✓	✓	✓	✓
Fiber Check	✓	✓	✓	✓	✓	✓
Telnet/SSH	✓	✓	✓	✓	✓	✓
Redundancy Protocols						
PRP/HSR	✓	✓	✓	✓	✓	✓
STP/RSTP/MSTP	✓	✓	✓	✓	✓	✓
MRP	✓	✓	✓	✓	✓	✓
Turbo Ring/Turbo Chain	✓	✓	✓	✓	✓	✓
Security						
HTTPS/SSL	✓	✓	✓	✓	✓	✓
TACACS+/RADIUS	✓	✓	✓	✓	✓	✓
MAC Authentication Bypass	✓	✓	✓	✓	✓	✓
IEEE 802.1X	✓	✓	✓	✓	✓	✓
MAC Sticky	✓	✓	✓	✓	✓	✓
Access Control List	✓	✓	✓	✓	✓	✓
DHCP Snooping	✓	✓	✓	✓	✓	✓
Dynamic ARP Inspection	✓	✓	✓	✓	✓	✓
IP Source Guard	✓	✓	✓	✓	✓	✓
Time Management						
IEEE 1588v2 PTP (Hardware-based)	✓	✓	✓	✓	✓	✓
Power Over Ethernet						
IEEE 802.3af/at	✓	✓	✓	✓	✓	✓
IEEE 802.3bt	✓	✓	✓	✓	✓	✓
Force Mode	✓	✓	✓	✓	✓	✓
Total Power Budget (Max.)	720 W					
Each PoE Port (Max.)	IEEE 802.3at: Up to 30 W (up to 36 W in high-power mode) IEEE 802.3bt: Up to 90 W ¹					
Power Parameters						
Input Voltage	48 VDC					
Physical Characteristics						
Installation	DIN-rail mounting, Wall mounting (with optional kit), Rack mounting (with optional kit)					
Operating Temperature						
-10 to 60°C (14 to 140°F)	-	-	-	✓	✓	✓
-40 to 75°C (-40 to 167°F)	✓	✓	✓	✓	✓	✓
Standards and Certifications						
EMI	CISPR 32, FCC Part 15B Class A					
Safety	EN IEC 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1, UL 61010-2-201, EN 61010-2-201			EN IEC 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1		
Hazardous Locations	-			ATEX, CID2		
Railway	EN 50121-4					
Traffic Control	NEMA TS2					
Power Substation	IEC 61850-3, IEEE 1613					

¹ IEEE 802.3bt PoE is only supported with LM-7000H-4PoE/-4GPoE modules HW rev 3.0.0 and later.

EN 50155 Ethernet Switches



Product Series	TN-4508B	TN-4512B	TN-4516B	TN-4520B	TN-4524B	TN-4528B
Ethernet Interface						
Max. Number of Ports	8	12	16	20	24	28
10/100/1000BaseT(X) Ports (M12 X-coded 8-pin Female Connector)	–	Up to 4	Up to 8	Up to 4	Up to 4	Up to 4
10/100/1000BaseT(X) Ports (M12 X-coded 8-pin Female Connector With Bypass Relay)	–	–	Up to 4	Up to 4	Up to 4	Up to 4
10/100BaseT(X) Ports (M12 D-coded 4-pin Female Connector)	8	Up to 12	Up to 16	–	–	–
PoE Ports (100/1000BaseT(X), M12 X-coded 8-pin Female Connector)	–	Up to 8	Up to 12	4	4	4
PoE Ports (10/100BaseT(X), M12 D-coded 4-pin Female Connector)	–	Up to 8	Up to 8	12	16	20
10/100/1000BaseT(X) Ports (Q-ODC Fiber Connector)	–	–	–	–	–	–
Filter						
802.1Q	✓	✓	✓	✓	✓	✓
IGMP v1/v2/v3	✓	✓	✓	✓	✓	✓
Port-based VLAN	✓	✓	✓	✓	✓	✓
Static Multicast	✓	✓	✓	✓	✓	✓
Management						
DHCP Option 66/67/82	✓	✓	✓	✓	✓	✓
IPv4/IPv6	✓	✓	✓	✓	✓	✓
QoS/CoS/ToS	✓	✓	✓	✓	✓	✓
DNS Server	✓	✓	✓	✓	✓	✓
Redundancy Protocols						
MRP	✓	✓	✓	✓	✓	✓
MSTP	✓	✓	✓	✓	✓	✓
RSTP	✓	✓	✓	✓	✓	✓
Turbo Ring V2	✓	✓	✓	✓	✓	✓
Turbo Ring With DRC	✓	✓	✓	✓	✓	✓
Port Trunk	✓	✓	✓	✓	✓	✓
Security						
HTTPS/SSL	✓	✓	✓	✓	✓	✓
TACACS+	✓	✓	✓	✓	✓	✓
RADIUS	✓	✓	✓	✓	✓	✓
Port Lock	✓	✓	✓	✓	✓	✓
Time Management						
NTP Server/Client	✓	✓	✓	✓	✓	✓
SNTP	✓	✓	✓	✓	✓	✓
Power Parameters						
Input Voltage	24/36/48/72/96/110 VDC, Redundant dual inputs					
Power Connector	M12 K-coded connector					
Total PoE Power Budget	–	PoE models: 80 W	PoE models: 150 W	150 W	150 W	150 W
Physical Characteristics						
IP Rating	IP42					
Protection	-CT models: PCB conformal coating					
Environmental Limits						
Operating Temperature	-40 to 70°C (-40 to 158°F)					
Standards and Certifications						
Railway	EN 50121-4, EN 50155, IEC 60571					
Railway Fire Protection	EN 45545-2					

EN 50155 Ethernet Switches



Product Series	TN-4512A	TN-4516A	TN-4516A-PoE	TN-4516A-PoE-ODC	TN-4520A-PoE	TN-4524A-PoE	TN-4528A-PoE	TN-4528A-PoE-ODC
Ethernet Interface								
Max. Number of Ports	12	16	16	16	20	24	28	28
10/100/1000BaseT(X) Ports (M12 X-coded 8-pin Female Connector)	–	Up to 4	–	–	–	–	–	–
10/100/1000BaseT(X) Ports (M12 X-coded 8-pin Female Connector With Bypass Relay)	–	Up to 4	Up to 2	–	–	–	Up to 2	–
10/100BaseT(X) Ports (M12 D-coded 4-pin Female Connector)	12	Up to 16	–	–	–	8	8	8
PoE Ports (100/1000BaseT(X), M12 X-coded 8-pin Female Connector)	–	–	Up to 4	2	4	–	Up to 4	2
PoE Ports (10/100BaseT(X), M12 D-coded 4-pin Female Connector)	–	–	12	12	16	16	16	16
10/100/1000BaseT(X) Ports (Q-ODC Fiber Connector)	–	–	–	2	–	–	–	2
Filter								
802.1Q	✓	✓	✓	✓	✓	✓	✓	✓
IGMP v1/v2/v3	✓	✓	✓	✓	✓	✓	✓	✓
Port-based VLAN	✓	✓	✓	✓	✓	✓	✓	✓
Static Multicast	✓	✓	✓	✓	✓	✓	✓	✓
Management								
DHCP Option 66/67/82	✓	✓	✓	✓	✓	✓	✓	✓
IPv4/IPv6	✓	✓	✓	✓	✓	✓	✓	✓
QoS/CoS/ToS	✓	✓	✓	✓	✓	✓	✓	✓
DNS Server	✓	✓	✓	✓	✓	✓	✓	✓
Redundancy Protocols								
MSTP	✓	✓	✓	✓	✓	✓	✓	✓
RSTP	✓	✓	✓	✓	✓	✓	✓	✓
Turbo Ring V2	✓	✓	✓	✓	✓	✓	✓	✓
Turbo Ring With DRC	✓	✓	✓	✓	✓	✓	✓	✓
Port Trunk	✓	✓	✓	✓	✓	✓	✓	✓
Security								
HTTPS/SSL	✓	✓	✓	✓	✓	✓	✓	✓
TACACS+	✓	✓	✓	✓	✓	✓	✓	✓
RADIUS	✓	✓	✓	✓	✓	✓	✓	✓
Port Lock	✓	✓	✓	✓	✓	✓	✓	✓
Time Management								
NTP Server/Client	✓	✓	✓	✓	✓	✓	✓	✓
SNTP	✓	✓	✓	✓	✓	✓	✓	✓
Power Parameters								
Input Voltage	24/36/48/72/96/110 VDC, Redundant dual inputs							
Power Connector	M23 connector							
Total PoE Power Budget	–	120 W						
Physical Characteristics								
IP Rating	IP42							
Protection	-CT models: PCB conformal coating							
Environmental Limits								
Operating Temperature	-40 to 70°C (-40 to 158°F)							
Standards and Certifications								
Railway	EN 50121-4, EN 50155, IEC 60571							
Railway Fire Protection	EN 45545-2							

EN 50155 Ethernet Switches



Product Series	TN-G4500	TN-G6500	TN-5508A	TN-5508A-PoE	TN-5510A	TN-5510A-PoE
Ethernet Interface						
Max. Number of Ports	16	12	8	8	10	10
10GBaseT(X) Ports (M12 X-coded 8-pin Female Connector With Bypass Relay)	Up to 2	-	-	-	-	-
10/100/1000BaseT(X) Ports (M12 X-coded 8-pin Female Connector)	4	4	-	-	Up to 2	Up to 2
10/100/1000BaseT(X) Ports (M12 X-coded 8-pin Female Connector With Bypass Relay)	-	-	-	-	Up to 2	Up to 2
10/100BaseT(X) Ports (M12 D-coded 4-pin Female Connector)	-	-	8	-	8	-
PoE Ports (10GBaseT(X), M12 X-coded 8-pin Female Connector)	Up to 4	-	-	-	-	-
PoE Ports (100/1000BaseT(X), M12 X-coded 8-pin Female Connector)	8	8	-	-	-	-
PoE Ports (10/100BaseT(X), M12 D-coded 4-pin Female Connector)	-	-	-	8	-	8
10/100/1000BaseT(X) Ports (Q-ODC Fiber Connector)	-	-	-	-	Up to 2	Up to 2
Filter						
802.1Q	✓	✓	✓	✓	✓	✓
IGMP v1/v2/v3	✓	✓	✓	✓	✓	✓
Port-based VLAN	✓	✓	✓	✓	✓	✓
Static Multicast	✓	✓	✓	✓	✓	✓
Management						
DHCP Option 66/67/82	✓	✓	✓	✓	✓	✓
IPv4/IPv6	✓	✓	✓	✓	✓	✓
QoS/CoS/ToS	✓	✓	✓	✓	✓	✓
DNS Server	✓	✓	-	-	-	-
Redundancy Protocols						
MSTP	✓	✓	✓	✓	✓	✓
RSTP	✓	✓	✓	✓	✓	✓
Turbo Ring V2	✓	✓	✓	✓	✓	✓
Turbo Ring With DRC	✓	✓	✓	✓	✓	✓
Port Trunk	✓	✓	✓	✓	✓	✓
Security						
HTTPS/SSL	✓	✓	✓	✓	✓	✓
TACACS+	✓	✓	✓	✓	✓	✓
RADIUS	✓	✓	✓	✓	✓	✓
Port Lock	✓	✓	✓	✓	✓	✓
Time Management						
NTP Server/Client	✓	✓	✓	✓	✓	✓
SNTP	✓	✓	✓	✓	✓	✓
Power Parameters						
Input Voltage	24/36/48/72/96/110 VDC, Redundant dual inputs					
Power Connector	M12 K-coded male connector			M23 connector		
Total PoE Power Budget	120 W	96 W	-	120 W	-	120 W
Physical Characteristics						
IP Rating	IP40	IP67	IP54			
Protection	-CT models: PCB conformal coating					
Environmental Limits						
Operating Temperature	-40 to 70°C (-40 to 158°F)			-40 to 75°C (-40 to 167°F)		
Standards and Certifications						
Railway	EN 50121-4, EN 50155, IEC 60571		EN 50121-4, EN 50155			
Railway Fire Protection	EN 45545-2					

EN 50155 Ethernet Switches




Product Series	TN-5516A	TN-5516A-PoE	TN-5518A	TN-5518A-PoE
Ethernet Interface				
Max. Number of Ports	16	16	18	18
10/100/1000BaseT(X) Ports (M12 X-coded 8-pin Female Connector)	-	-	Up to 2	Up to 2
10/100/1000BaseT(X) Ports (M12 X-coded 8-pin Female Connector With Bypass Relay)	-	-	Up to 2	Up to 2
10/100BaseT(X) Ports (M12 D-coded 4-pin Female Connector)	16	8	16	8
PoE Ports (10/100BaseT(X), M12 D-coded 4-pin Female Connector)	-	8	-	8
10/100/1000BaseT(X) Ports (Q-ODC Fiber Connector)	-	-	-	-
Filter				
802.1Q	✓	✓	✓	✓
IGMP v1/v2/v3	✓	✓	✓	✓
Port-based VLAN	✓	✓	✓	✓
Static Multicast	✓	✓	✓	✓
Management				
DHCP Option 66/67/82	✓	✓	✓	✓
IPv4/IPv6	✓	✓	✓	✓
QoS/CoS/ToS	✓	✓	✓	✓
DNS Server	✓	✓	✓	✓
Redundancy Protocols				
MSTP	✓	✓	✓	✓
RSTP	✓	✓	✓	✓
Turbo Ring V2	✓	✓	✓	✓
Turbo Ring With DRC	✓	✓	✓	✓
Port Trunk	✓	✓	✓	✓
Security				
HTTPS/SSL	✓	✓	✓	✓
TACACS+	✓	✓	✓	✓
RADIUS	✓	✓	✓	✓
Port Lock	✓	✓	✓	✓
Time Management				
NTP Server/Client	✓	✓	✓	✓
SNTP	✓	✓	✓	✓
Power Parameters				
Input Voltage	24/36/48/72/96/110 VDC, Redundant dual inputs			
Power Connector	M23 connector			
Total PoE Power Budget	-	120 W	-	120 W
Physical Characteristics				
IP Rating	IP54			
Protection	-CT models: PCB conformal coating			
Environmental Limits				
Operating Temperature	-40 to 75°C (-40 to 167°F)			
Standards and Certifications				
Railway	EN 50121-4, EN 50155			
Railway Fire Protection	EN 45545-2			

EN 50155 Ethernet Switches



Product Series	TN-5305A	TN-5308A	TN-5308A-PoE
Ethernet Interface			
Max. Number of Ports	5	8	8
10/100BaseT(X) Ports (M12 D-coded 4-pin Female Connector)	5	8	–
PoE Ports (10/100BaseT(X), M12 D-coded 4-pin Female Connector)	–	–	8
Power Parameters			
Input Voltage	24/36/48/72/96/110 VDC, Single input		
Power Connector	M12 4-pin A-coded male connector		
Total PoE Power Budget	–	–	50.2 W
Physical Characteristics			
IP Rating	IP54		
Protection	-CT models: PCB conformal coating		
Environmental Limits			
Operating Temperature	-40 to 70°C (-40 to 158°F)		
Standards and Certifications			
Railway	EN 50121-4, EN 50155, IEC 60571		
Railway Fire Protection	EN 45545-2		

Two-wire Ethernet Switches (SPE/APL)

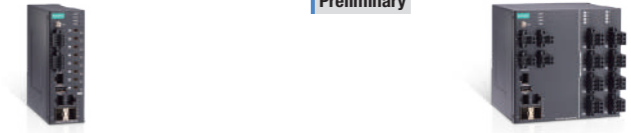

Preliminary

Product Series	TWS-3010-SPE	TWS-3010-APL
Ethernet Interface		
Max. Number of Ports	10	10
Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP)	2	
SPE Ports (10Base-T1L)	8 (PoDL Class 10, 11, 12)	–
Ethernet-APL Spur Ports (10Base-T1L)	–	8 (Ethernet-APL Power Class A, C)
Filter		
802.1p Class of Service	✓	✓
802.1Q VLAN	✓	✓
IGMP v1/v2/v3 Snooping	✓	✓
Industrial Protocols		
EtherNet/IP	✓	✓
Modbus TCP	✓	✓
PROFINET	✓	✓
Management		
DHCP Relay Agent (Option 82)	✓	✓
Port Mirroring	✓	✓
RMON/SNMPv1/v2c/v3	✓	✓
Syslog	✓	✓
Fiber Check	✓	✓
Telnet/SSH	✓	✓
TFTP	✓	✓
Redundancy Protocols		
STP/RSTP/MSTP	✓	✓
MRP	✓	✓
Security		
HTTPS/SSL	✓	✓
TACACS+/RADIUS	✓	✓
IEEE 802.1X	✓	✓
MAC Sticky	✓	✓
Power Parameters		
Input Voltage	24 VDC Redundant dual inputs	24/48 VDC Redundant dual inputs
Physical Characteristics		
Installation	DIN-rail mounting, Wall mounting (with optional kit)	
Environmental Limits		
Operating Temperature	-40 to 75°C (-40 to 167°F)	
Standards and Certifications		
EMI	FCC Part 15B Class A	
Safety	UL 61010-2-201, EN 62368-1	



Secure Routers

Featuring a broad portfolio that includes IEC 62443-4-2 Security Level 2 certified models, our secure routers are the premier solution in the railway and automation industries. Our routers facilitate data connectivity and ensure the highest level of industrial network security through robust security-hardened functions, including intrusion prevention systems (IPS), intrusion detection systems (IDS), and deep packet inspection (DPI). Additionally, Moxa offers IEC 61375-2-5 Ethernet routers designed to manage traffic between Ethernet train backbones (ETB) and Ethernet consist networks (ECN).



Secure Routers
Product Pages



Secure Routers

Moxa's EDR Series industrial secure routers protect the control networks of critical facilities while maintaining fast data transmission. They are specifically designed for automation networks and are integrated cybersecurity solutions that combine an industrial firewall, VPN, router, and L2 switching functions into a single product that protects the integrity of remote access and critical devices.



EN 50155 Routers

Moxa's TN Series routers are designed for rolling stock backbone networks and include high-performance M12 routers with four bypass relay backbone ports. These routers feature firewall, ETBN, and routing functionality to facilitate the deployment of applications across networks.

Secure Routers



Product Series	EDR-G9010	EDR-G9004	EDR-8010
Input/Output Interface			
Alarm Contact Channels	Resistive load: 1 A @ 24 VDC		
Digital Input Channels	+13 to +30 V for state 1, -30 to +3 V for state 0, Max. input current: 8 mA		
Ethernet Interface			
10/100/1000BaseT(X) Ports (RJ45 Connector)	8	2 (with Gen3 LAN Bypass)	–
1000BaseSFP Slots	–	–	2
1000/2500BaseSFP Slots	2	–	–
Combo Ports (10/100/1000BaseT(X) or 1000/2500BaseSFP)	–	2	–
10/100BaseT(X) Ports (RJ45 Connector)	–	–	8
100/1000BaseSFP Slots	–	–	–
Ethernet Software Features			
Redundancy Protocols	RSTP, STP, Turbo Ring v2, Turbo Chain	–	RSTP, STP, Turbo Ring v2, Turbo Chain
Routing (Based on RFC 2544)	Max. 350K packets per second / 2 Gbps		Max. 50K packets per second / 500 Mbps
Routing Redundancy	VRRP		
Unicast Routing	OSPF, RIPv1/v2, Static Route		
DoS and DDoS Protection			
Technology	ARP-Flood, FIN Scan, ICMP-Flood, TCP Sessions Without SYN, NMAP-ID Scan, NMAP-Xmas Scan, Null Scan, SYN/FIN Scan, SYN/RST Scan SYN-Flood, Xmas Scan		
Firewall			
Filter	DDoS, Ethernet protocols, ICMP, IP address, MAC address, Ports		
Deep Packet Inspection ¹	DNP3, EtherNet/IP, IEC 60870-5-104, IEC 61850 MMS, Modbus TCP, Modbus UDP, Omron FINS, Siemens S7 Comm., MELSEC, Siemens S7 Comm. Plus, OPC UA		
Intrusion Prevention System	Requires an additional license		
Throughput (Based on RFC 2544)	Max. 350K packets per second / 2 Gbps		Max. 80K packets per second / 1 Gbps
IPsec VPN			
Concurrent VPN Tunnels	Max. 250 IPsec VPN tunnels		Max. 50 IPsec VPN tunnels
Throughput (Based on RFC 2544)	Max. 800 Mbps (conditions: AES-256, SHA-256)		Max. 300 Mbps (conditions: AES-256, SHA-256)
NAT			
Features	1-to-1, N-to-1, NAT loopback, Port forwarding		
Power Parameters			
Input Voltage	-LV models: 12/24/48 VDC (DNV certified for 24 VDC) -HV models: 120/240 VDC/VAC	12/24/48 VDC	
Physical Characteristics			
Dimensions	-LV models: 58 x 135 x 105 mm (2.28 x 5.31 x 4.13 in) -HV models: 64 x 135 x 105 mm (2.52 x 5.31 x 4.13 in)	45 x 135 x 105 mm (1.77 x 5.31 x 4.13 in)	
Weight	-LV models: 1,030 g (2.27 lb) -HV models: 1,150 g (2.54 lb)	800 g (1.76 lb)	520 g (1.15 lb)
Installation	DIN-rail mounting (DNV certified), Wall mounting (with optional kit)		
Environmental Limits			
Operating Temperature	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F) EDR-G9010-VPN-2MGSFP(-T) models: DNV certified for -25 to 70°C (-13 to 158°F)	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F) All models: DNV certified for -25 to 70°C (-13 to 158°F)	
Standards and Certifications			
Cybersecurity	IEC 62443-4-2 Security Level 2		–
Railway	-LV models: EN 50121-4	EN 50121-4	
Traffic Control	-LV models: NEMA TS2		NEMA TS2
Maritime	-LV models: IEC 60945, DNV		IEC 60945, DNV
Power Substation	IEEE 1613, IEC 61850-3 Edition 2.0		
Hazardous Locations	-LV models: ATEX, CID2	ATEX, CID2, IECEx	

¹ Additional protocols will be supported through future firmware updates.

Secure Routers



Product Series	NAT-102	NAT-108
Input/Output Interface		
Alarm Contact Channels	–	–
Digital Input Channels	–	–
Ethernet Interface		
10/100/1000BaseT(X) Ports (RJ45 Connector)	–	–
1000BaseSFP Slots	–	–
1000/2500BaseSFP Slots	–	–
Combo Ports (10/100/1000BaseT(X) or 1000/2500BaseSFP)	–	–
10/100BaseT(X) Ports (RJ45 Connector)	2	8
100/1000BaseSFP Slots	–	–
Ethernet Software Features		
Redundancy Protocols	–	–
Routing (Based on RFC 2544)	Max. 15K packets per second / 100 Mbps	
Routing Redundancy	–	–
Unicast Routing	Static Route	
DoS and DDoS Protection		
Technology	–	–
Firewall		
Filter	IP address, MAC address (Device Lockdown), Ports	
Deep Packet Inspection	–	–
Intrusion Prevention System	–	–
Throughput (Based on RFC 2544)	Max. 15K packets per second / 100 Mbps	
IPsec VPN		
Concurrent VPN Tunnels	–	–
Throughput (Based on RFC 2544)	–	–
NAT		
Features	1-to-1, N-to-1, NAT loopback, Port forwarding	1-to-1, N-to-1, Port forwarding, NAT loopback, IP Twins Mapping
Power Parameters		
Input Voltage	12/24/48 VDC	
Physical Characteristics		
Dimensions	20 x 90 x 73 mm (0.79 x 3.54 x 2.87 in)	36 x 90 x 73 mm (1.42 x 3.54 x 2.87 in)
Weight	210 g (0.47 lb)	330 g (0.73 lb)
Installation	DIN-rail mounting, Wall mounting (with optional kit)	
Environmental Limits		
Operating Temperature	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	
Standards and Certifications		
Cybersecurity	–	–
Railway	EN 50121-4	
Traffic Control	NEMA TS2	
Maritime	–	–
Power Substation	–	–
Hazardous Locations	ATEX, CID2	

EN 50155 Secure Routers



Product Series	TN-4908	TN-4908-4GTX	TN-4908-8GTX	TN-4908-4GPoE-4GTX	TN-4916-4GTX	TN-4916-12PoE-4GTX	TN-4916-8PoE-4GPoE-4GTX
Ethernet Interface							
Max. Number of Ports	8	8	8	8	16	16	16
10/100BaseT(X) Ports (M12 D-coded 4-pin Female Connector)	Up to 8	4	-	-	12	-	-
10/100BaseT(X) Ports (M12 D-coded 4-pin Female Connector With Bypass Relay)	Up to 4	-	-	-	-	-	-
PoE Ports (10/100BaseT(X), M12 D-coded 4-pin Female Connector)	-	-	-	-	-	12	8
PoE Ports (100/1000BaseT(X), M12 X-coded 8-pin Female Connector)	-	-	-	4	-	-	4
10/100/1000BaseT(X) Ports (M12 X-coded 8-pin Female Connector)	-	Up to 4	Up to 8	Up to 4	Up to 4	Up to 4	Up to 4
10/100/1000BaseT(X) Ports (M12 X-coded 8-pin Female Connector With Bypass relay)	-	Up to 4	Up to 4	Up to 4	Up to 4	Up to 4	Up to 4
Ethernet Software Features							
ETBN	Optional						
Filter	IGMP v1/v2, Static Multicast, 802.1Q						
Management	Back Pressure Flow Control, SNMP Inform, LLDP, Syslog, HTTP, HTTPS, Flow control, SMTP, QoS/CoS/ToS, Port Mirror, SNMP Trap, SNMPv1/v2c/v3, IPv4, Telnet, DHCP Server, SFTP, SCP, TFTP, RARP, Account Management						
Redundancy Protocols	RSTP, Static Port Trunk, Turbo Ring v2, STP						
Routing Redundancy	VRRP						
Security	Secure Boot, IPsec, L2TP (server), RADIUS, Trust access control						
Unicast Routing	RIPv1/v2, OSPF, Static Route						
Deep Packet Inspection	TRDP						
DoS and DDoS Protection							
Technology	NMAP-ID Scan, ARP-Flood, SYN/FIN Scan, Null Scan, ICMP-Flood, FIN Scan, SYN-Flood, TCP Sessions Without SYN, Xmas Scan, NMAP-Xmas Scan, SYN/RST Scan						
Firewall							
Filter	ICMP, MAC address, Ethernet protocols, Ports, IP address, DDoS						
Intrusion Prevention System	Requires an additional license						
Throughput	Max. 350K packets per second						
IPsec VPN							
Authentication	MD5 and SHA (SHA-256), RSA (key size: 1024-bit, 2048-bit), X.509 v3 certificate						
Concurrent VPN Tunnels	Max. 250 IPsec VPN tunnels						
NAT							
Features	1-to-1, N-to-1, Port forwarding						
Serial Interface							
Console Port	RS-232 (M12 B-coded 5-pin female connector)						
Power Parameters							
Input Voltage	24/36/48/72/96/110 VDC, Redundant dual inputs						
Power Connector	M12 K-coded 5-pin male connector						
Total PoE Power Budget	-	-	-	50 W	-	95 W	95 W
Physical Characteristics							
Dimensions	160 x 115 x 70 mm (6.30 x 4.53 x 2.76 in)			160 x 115 x 100 mm (6.30 x 4.53 x 3.94 in)	206 x 115 x 100 mm (8.10 x 4.53 x 3.94 in)		
IP Rating	IP40						
Installation	Wall mounting						
Protection	PCB conformal coating						
Environmental Limits							
Operating Temperature	-40 to 70°C (-40 to 158°F)						
Standards and Certifications							
EMC	EN 55032, EN 55035						
EMI	CISPR 32, FCC Part 15B Class A						
Cybersecurity	IEC 62443-4-2 Security Level 2						
Railway	EN 50121-4, EN 50155, IEC 60068-2-1, IEC 60068-2-14, IEC 60068-2-2, IEC 60068-2-30, IEC 60068-2-78, IEC 60571						
Railway Fire Protection	EN 45545-2						
Safety	IEC 62368, UL 62368						

This page is intentionally left blank.

Wireless AP/Bridge/Client

Moxa's industrial WLAN AP/bridge/client product portfolios are designed to overcome the challenges of harsh industrial environments. High electromagnetic immunity protects devices against electromagnetic disturbances while power isolation guards them against voltage instability. In addition, wide temperature ranges and shock and vibration resistance ensure reliable operation even in difficult environments.



Wireless AP/Bridge/Client Product Pages



WLAN AP/Bridge/Client

Moxa's extensive collection of industrial-grade wireless 3-in-1 AP/bridge/client products combine a rugged casing with high-performance Wi-Fi connectivity to deliver a secure and reliable wireless network connection, even in environments with water, dust, and vibration.

47



Rail Wireless LAN AP/Client

Moxa's field-proven wireless LAN products enable operators to manage carriage-to-carriage and train-to-ground communications with increased efficiency, empowering you to deploy reliable train-control operations, video surveillance, and useful onboard multimedia services that enhance the safety and comfort of your passengers.

50



Rail Wireless Access Controller

Combining advanced controller-based roaming with Turbo Roaming technology and a visualized management interface, Moxa's wireless controllers enhance the reliability of train-to-ground communication and streamline management for improved operational efficiency.

52

Wireless AP/Bridge/Client - Wi-Fi 6




Product Series	AWK-1161C	AWK-1165C	AWK-1161A	AWK-1165A	AWK-3262A	AWK-4262A	
WLAN Interface							
WLAN Standards	2.4 GHz: 802.11b/g/n/ac/ax 5 GHz: 802.11a/n/ac/ax						
Wireless Security	WPA/WPA2/WPA3						
Transmission Rate	2.4 GHz: 802.11b: 1 to 11 Mbps 802.11g: 6 to 54 Mbps 802.11n: 6.5 to 300 Mbps 802.11ax: 6.5 to 574 Mbps 5 GHz: 802.11a: 6 to 54 Mbps 802.11n: 6.5 to 300 Mbps 802.11ac: 6.5 to 867 Mbps 802.11ax: 6.5 to 1201 Mbps						
WLAN Operation Mode	Client, Client-router, Slave, Sniffer		Access point, Master, Sniffer		Access point, Master, Mesh, Client, Client-router, Slave, Sniffer		
Antenna	External, 2/2 dBi, Omnidirectional				External, 3/6 dBi, Omnidirectional		
Antenna Connectors	2 x RP-SMA (female)				2 x N-type (female)		
Ethernet Interface							
10/100/1000/2500BaseT(X) PoE Ports	-	-	-	-	1 (RJ45)	1 (M12)	
10/100/1000BaseT(X) Ports	1 (RJ45)	5 (RJ45)	1 (RJ45)	5 (RJ45)	1 (RJ45)	1 (M12)	
LED Interface							
LED Indicators	PWR, WLAN, SYSTEM				PWR1, PWR2, PoE, SYS, 2.4G, 5G	PWR, LAN 1, LAN 2, 2.4GHz, 5GHz, SYS	
Physical Characteristics							
Housing	Metal						
IP Rating	IP30					IP68	
Dimensions	Standard models: 100 x 60 x 34.2 mm (3.94 x 2.36 x 1.35 in) Wide temp. models: 100 x 60 x 47.2 mm (3.94 x 2.36 x 1.86 in)	Standard models: 100 x 60 x 53 mm (3.94 x 2.36 x 2.09 in) Wide temp. models: 100 x 60 x 66 mm (3.94 x 2.36 x 2.60 in)	Standard models: 100 x 60 x 34.2 mm (3.94 x 2.36 x 1.35 in) Wide temp. models: 100 x 60 x 47.2 mm (3.94 x 2.36 x 1.86 in)	Standard models: 100 x 60 x 53 mm (3.94 x 2.36 x 2.09 in) Wide temp. models: 100 x 60 x 66 mm (3.94 x 2.36 x 2.60 in)	45 x 130 x 100 mm (1.77 x 5.12 x 3.94 in)	65.9 x 157.6 x 244 mm (2.59 x 6.20 x 9.61 in)	
Weight	Standard models: 330 g (0.73 lb) Wide temp. models: 387.5 g (0.85 lb)	Standard models: 428.5 g (0.94 lb) Wide temp. models: 516.5 g (1.14 lb)	Standard models: 330 g (0.73 lb) Wide temp. models: 387.5 g (0.85 lb)	Standard models: 428.5 g (0.94 lb) Wide temp. models: 516.5 g (1.14 lb)	755 g (1.7 lb)	1,980 g (4.37 lb)	
Installation	DIN-rail mounting, Wall mounting (with optional kit)					Wall mounting, DIN-rail mounting (with optional kit), Pole mounting (with optional kit)	
Power Parameters							
Input Voltage	9 to 30 VDC				12 to 48 VDC		
Power Connector	1 removable 3-contact terminal block				1 removable 8-contact terminal block	M12 A-coded 5-pin male connector	
Power Consumption	14 W (max.)				24 W (max.)		
Environmental Limits							
Operating Temperature	Standard models: -25 to 60°C (-13 to 140°F), Wide temp. models: -40 to 75°C (-40 to 167°F)					-40 to 75°C (-40 to 167°F)	
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)						
Ambient Relative Humidity	5 to 95% (non-condensing)						
Standards and Certifications							
EMC	EN 61000-6-2/-6-4, EN 55032/35						
EMI	CISPR 32, FCC Part 15B Class A						
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V/m IEC 61000-4-8 PFMF: 30 A/m						
Road Vehicles	E-Mark E1				-		
Medical	IEC 60601				-		
Safety	IEC 62368-1, UL 62368-1						
Cybersecurity	EN 18031-1						
Vibration	IEC 60068-2-6						
Radio	EN 300 328, EN 301 489-1/17, EN 301 893, FCC, MIC, NCC, RCM, SRR, WPC, KC, NBTC, IC				EN 300 328, EN 301 489-1/17, EN 301 893, FCC, MIC, NCC, RCM, SRR, WPC, KC, NBTC, IC	EN 300 328, EN 301 489-1/17, EN 301 893, FCC, MIC, NCC, RCM, SRR, WPC, KC, NBTC, IC	

Wireless AP/Bridge/Client - Wi-Fi 5



Product Series	AWK-1151C	AWK-3252A	AWK-4252A
WLAN Interface			
WLAN Standards	2.4 GHz: 802.11b/g/n 5 GHz: 802.11a/n/ac Wave 2		
Wireless Security	WPA/WPA2/WPA3		
Transmission Rate	2.4 GHz: 802.11b: 1 to 11 Mbps 802.11g: 6 to 54 Mbps 802.11n: 6.5 to 300 Mbps 5 GHz: 802.11a: 6 to 54 Mbps 802.11n: 6.5 to 300 Mbps 802.11ac: 6.5 to 867 Mbps		
WLAN Operation Mode	Client, Client-router, Slave, Sniffer		Access point, Master, Mesh, Client, Client-router, Slave, Sniffer
Antenna	External, 2/2 dBi, Omnidirectional		External, 3/6 dBi, Omnidirectional
Antenna Connectors	2 x RP-SMA (female)		2 x N-type (female)
Ethernet Interface			
10/100/1000BaseT(X) Ports (RJ45 Connector)	1	1	1
PoE Ports (10/100/1000BaseT(X), RJ45 Connector)	-	1	1
LED Interface			
LED Indicators	PWR, WLAN, SYSTEM	PWR1, PWR2, PoE, SYS, 2.4GHz, 5GHz	PWR, LAN1, LAN2, 2.4GHz, 5GHz, SYS
Physical Characteristics			
Housing	Metal		
IP Rating	IP30		IP68
Dimensions	100 x 130 x 22 mm (3.94 x 5.12 x 0.87 in)	45 x 130 x 100 mm (1.77 x 5.12 x 3.94 in)	66.5 x 157.6 x 244 mm (2.56 x 6.20 x 9.61 in)
Weight	436 g (0.96 lb)	700 g (1.5 lb)	2,024 g (4.7 lb)
Installation	DIN-rail mounting, Wall mounting (with optional kit)		Wall mounting, DIN-rail mounting (with optional kit), Pole mounting (with optional kit)
Power Parameters			
Input Current	9 to 30 VDC, 1.57 to 0.47 A	12 to 48 VDC, 2.2 to 0.5 A	12 to 48 VDC, 2.2 to 0.55 A
Input Voltage	9 to 30 VDC	12 to 48 VDC PoE: 48 VDC Redundant dual inputs	
Power Connector	1 removable 3-contact terminal block	1 removable 10-contact terminal block	M12 A-coded 5-pin male connector
Power Consumption	14 W (max.)	28.4 W (max.)	
Environmental Limits			
Operating Temperature	Standard models: -25 to 60°C (-13 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)		-40 to 75°C (-40 to 167°F)
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)		
Ambient Relative Humidity	5 to 95% (non-condensing)		
Standards and Certifications			
EMC	EN 61000-6-2/-6-4, EN 55032/35		
EMI	CISPR 32, FCC Part 15B Class A		
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V/m IEC 61000-4-8 PFMF: 30 A/m	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V/m IEC 61000-4-8 PFMF: 30 A/m	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V/m IEC 61000-4-8 PFMF: 30 A/m
Road Vehicles	E-Mark E1		
Safety	IEC 60950-1, IEC 62368-1, UL 62368-1		
Vibration	IEC 60068-2-6		
Radio	EN 300 328, EN 301 489-1/17, EN 301 893, FCC, MIC, NCC, RCM, SRR, WPC, KC, NBTC, IC		
Cybersecurity	IEC 62443-4-2 Security Level 1, EN 18031-1		
Hazardous Locations	-	ATEX, CID2, IECEx	-

Wireless AP/Bridge/Client - Wi-Fi 4

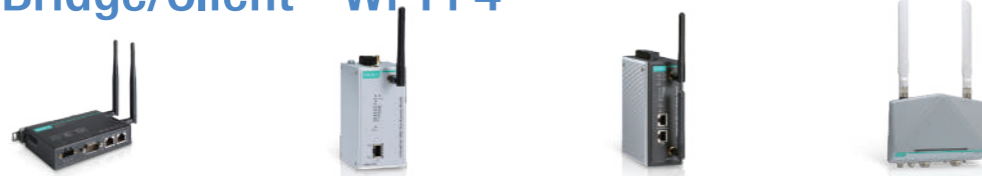

Product Series	AWK-1137C	AWK-1131A	AWK-3131A	AWK-4131A
WLAN Interface				
WLAN Standards	802.11a/b/g/n			
Wireless Security	WPA/WPA2			
Transmission Rate	802.11b: 1 to 11 Mbps 802.11a/g: 6 to 54 Mbps 802.11n: 6.5 to 300 Mbps			
WLAN Operation Mode	Client, Client-router, Slave, Sniffer	Access point, Client, Sniffer	Access point, Client, Client-router, Master, Slave, Sniffer	
Antenna	External, 2/2 dBi, Omnidirectional			External, 3/6 dBi, Omnidirectional
Antenna Connectors	2 x RP-SMA (female)			2 x N-type (female)
Ethernet Interface				
10/100BaseT(X) Ports (RJ45 Connector)	2	-	-	-
10/100/1000BaseT(X) Ports (RJ45 Connector)	-	1	-	-
PoE Ports (10/100/1000BaseT(X), RJ45 Connector)	-	-	1	1
LED Interface				
LED Indicators	SYS, LAN1, LAN2, WLAN, Serial	PWR, FAULT, STATE, SIGNAL, WLAN, LAN	PWR1, PWR2, PoE, FAULT, STATE, SIGNAL, WLAN, LAN	PWR, FAULT, STATE, WLAN, LAN
Input/Output Interface				
Digital Inputs	-	-	✓	✓
Physical Characteristics				
Housing	Metal			
IP Rating	IP30			IP68
Dimensions	77.1 x 115.5 x 26 mm (3.04 x 4.55 x 1.02 in)	58 x 115 x 70 mm (2.29 x 4.53 x 2.76 in)	52.7 x 135 x 105 mm (2.08 x 5.32 x 4.13 in)	224 x 147.7 x 66.5 mm (8.82 x 5.82 x 2.62 in)
Weight	470 g (1.03 lb)	307 g (0.68 lb)	860 g (1.9 lb)	1,400 g (3.09 lb)
Installation	DIN-rail mounting, Wall mounting (with optional kit)			Wall mounting, DIN-rail mounting (with optional kit), Pole mounting (with optional kit)
Power Parameters				
Input Voltage	9 to 30 VDC	12 to 48 VDC	12 to 48 VDC PoE: 48 VDC Redundant dual inputs	
Power Connector	1 removable 3-contact terminal block	1 removable 4-contact terminal block	1 removable 10-contact terminal block	M12 A-coded 5-pin male connector
Power Consumption	11.7 W (max.)	6.96 W (max.)	7.2 W (max.)	7.68 W (max.)
Reverse Polarity Protection	Supported			
Environmental Limits				
Operating Temperature	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)		Standard models: -25 to 60°C (-13 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	-40 to 75°C (-40 to 167°F)
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)			
Ambient Relative Humidity	5 to 95% (non-condensing)			
Standards and Certifications				
EMC	EN 61000-6-2/-6-4, EN 55032/24	EN 55032/24	EN 61000-6-2/-6-4	
EMI	CISPR 22, FCC Part 15B Class A		CISPR 32, FCC Part 15B Class A	
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Radio	EN 300 328, EN 301 489-1/17, EN 301 893, FCC ID SLE-1137C, MIC, NCC, SRRC, WPC, KC, RCM	EN 300 328, EN 301 489-1/17, EN 301 893, FCC ID SLE-WAPN008, MIC, NCC, RCM, SRRC, WPC, KC, RCM, ANATEL	EN 300 328, EN 301 489-1/17, EN 301 893, FCC ID SLE-WAPN008, MIC, NCC, RCM, SRRC, WPC, KC, RCM	EN 300 328, EN 301 489-1/17, EN 301 893, FCC ID SLE-WAPN008, ANATEL, MIC, NCC, RCM, SRRC, WPC, KC
Road Vehicles	E-Mark E1	-		-
Safety	EN 60950-1, UL 60950-1			
Cybersecurity	EN 18031-1			
Vibration	IEC 60068-2-6			
Hazardous Locations	-	-	ATEX, CID2, IECEx	-

Rail Wireless LAN



Product Series	TAP-M310R-1P1R1S	TAP-M310R-1P2R1S	TAP-M310R-NPS-1P1R	TAP-M310R-NPS-1R	TAP-213	TAP-323
WLAN Interface						
WLAN Standards	802.11a/b/g/n/ac/ax				802.11a/b/g/n	
Antenna Connectors	4 x N-type (female)	8 x N-type (female)	2 x N-type (female)		5 x N-type (female)	
Ethernet Interface						
Max. Number of Ports	5	6	1	1	2	6
Ethernet Ports	1 x 10/100/1000/2500BaseT(X) (M12 X-coded 8-pin female connector) 2 x 10/100/1000BaseT(X) (M12 X-coded 8-pin female connector)	2 x 10/100/1000/2500BaseT(X) (M12 X-coded 8-pin female connector) 2 x 10/100/1000BaseT(X) (M12 X-coded 8-pin female connector)	1 x 10/100/1000/2500BaseT(X) (M12 X-coded 8-pin female connector)		1 x 10/100/1000BaseT(X) (M12 X-coded 8-pin female connector)	4 x 10/100BaseT(X) (M12 D-coded 4-pin female connector)
Fiber Ports	2 x 1000/2500BaseSFP slots		-		1 x 1000BaseSFP slot	2 x 1000BaseSFP slots
PoE Support	-				PD	PSE
Serial Interface						
Console Port	RS-232 console (M12 A-coded 5-pin male connector)				USB-M12 console (M12 B-coded 5-pin female connector)	
Power Parameters						
Input Current	110 to 220 VAC, 50 to 60 Hz, 0.36 to 0.18 A (max.)	110 to 220 VAC, 50 to 60 Hz, 0.62 to 0.31 A (max.)	1.35 A @ 24 VDC, 0.3 A @ 110 VDC	1.35 A @ 24 VDC	0.65 A @ 24 VDC, 0.16 A @ 110 VDC	AC input: 110 to 220 VAC, 50 to 60 Hz, 1.1 A (max.) DC input: 110 to 220 VDC, 1.1 A (max.)
Input Voltage	110 to 220 VAC		24 to 110 VDC	24 VDC	24 to 110 VDC Dual inputs	110/220 VAC/VDC Dual inputs
Power Connector	M12 K-coded 5-pin male connector			M12 A-coded 4-pin male connector		M23 6-pin male connector
Power Consumption	39.6 W (max.)	68.2 W (max.)	33 W (max.)	32.4 W (max.)	17.6 W (max.)	85 W (max.)
Source of Input Power	-P1R1S/-1P2R1S models: AC -1P1R/-1R models: DC				DC or PoE (IEEE 802.3at)	AC, DC, or PoE (IEEE 802.3af)
Physical Characteristics						
IP Rating	IP67				IP68	
Installation	DIN-rail mounting		Wall mounting, DIN-rail mounting (with optional kit)		Wall mounting, DIN-rail mounting (with optional kit), Pole mounting (with optional kit)	Wall mounting, DIN-rail mounting (with optional kit)

Rail Wireless LAN



Product Series	AWK-3131A-RTG	AWK-3131A-RCC	AWK-3251A-RCC
WLAN Interface			
WLAN Standards	802.11a/b/g/n		2.4 GHz: 802.11b/g/n 5 GHz: 802.11a/n/ac Wave 2
Antenna Connectors	2 x QMA (female)		
Ethernet Interface			
Max. Number of Ports	1	1	1
Ethernet Ports	AWK-3131A-M12-RTG models: 1 x 10/100BaseT(X) (M12 D-coded 4-pin female connector)	1 x 10/100/1000BaseT(X) (M12 A-coded 8-pin female connector)	1 x 10/100/1000BaseT(X) (M12 X-coded 8-pin female connector)
Fiber Ports	AWK-3131A-SSC-RTG models: 1 x 100BaseFX (single-mode SC connector)	–	–
PoE Support	AWK-3131A-M12-RTG models: PD	PD	PD
Serial Interface			
Console Port	RS-232 (RJ45-type)		
Power Parameters			
Input Current	AWK-3131A-M12-RTG models: 0.85 A @ 12 VDC, 0.22 A @ 48 VDC AWK-3131A-SSC-RTG models: 1.0 A @ 12 VDC, 0.27 A @ 48 VDC	0.67 A @ 12 VDC, 0.17 A @ 48 VDC	12 to 48 VDC, 2.01 to 0.5 A
Input Voltage	12 to 48 VDC PoE: 48 VDC Dual inputs		
Power Connector	1 removable 10-contact terminal block		
Power Consumption	AWK-3131A-M12-RTG models: 10.5 W (max.) AWK-3131A-SSC-RTG models: 13 W (max.)	8.03 W (max.)	24.12 W (max.)
Physical Characteristics			
IP Rating	IP30		
Installation	DIN-rail mounting, Wall mounting (with optional kit)		

Rail Wireless Access Controller



Product Series	WAC-2004A	WAC-M300
Ethernet Interface		
10/100/1000BaseT(X) Ports (RJ45 Connector)	2 Port 1: Communications port for WAC/HA Port 2: Reserved	
Serial Interface		
Console Port	1 x RS-232 (DB9 male)	
Wireless Access Control		
Controller Failover Mode	1-on-1 hot backup	
Handover Time	50 ms	
Roaming Support	Turbo Roaming (L2/L3) with inter-controller capabilities	Turbo Roaming (L2) with inter-controller capabilities
WLAN Products Supported	Layer 2 networks: Up to 190 clients roaming between 400 APs Layer 3 networks: Up to 100 clients roaming between 190 APs	Layer 2 networks: Up to 190 clients roaming between 400 APs
Supported Devices		
TAP Products	TAP-213 Series, TAP-323 Series	TAP-M310R Series
AWK Products	AWK-3131A-RTG Series	
Power Parameters		
Input Current	1.2 A @ 100 VAC	
Input Voltage	100 to 240 VAC	
No. of Power Inputs	2	
Operating Voltage	100 to 240 VAC	
Physical Characteristics		
Installation	19-inch rack mounting	
Environmental Limits		
Operating Temperature	0 to 50°C (32 to 122°F)	

Cellular Gateways/Routers

Moxa's industrial cellular products empower a wide range of applications, from private 5G networks to public wireless wide area network (WWAN) communications. The burgeoning demand of IIoT has led to a rapid expansion of public WWAN networks, while private 5G networks have swiftly grown and are poised for a promising future. Moxa provides products that offer robust security, enhanced stability, and closer alignment with customer applications to meet specific business needs in a wide variety of scenarios.



Cellular Gateways/Routers
Product Pages



5G Cellular Gateways

Moxa's 5G cellular gateways enable the deployment of private 5G networks and facilitate communication with OT subsystems. These compact and power-efficient gateways are compatible with numerous telecom operators and network integrators, making them ideal for industrial environments.



55

LTE Cellular Gateways/Routers

Moxa LTE cellular gateways and routers help minimize potential risks associated with public networks. Stable connectivity supported by both wired and cellular redundancy mechanisms ensures reliable, secure, and versatile communication for remote sites.



56

5G Cellular Gateways



Product Series	CCG-1520-T	CCG-1510-TW-T	CCG-1510-US-T	CCG-1510-T
Cellular Interface				
Cellular Standards	5G	5G, 4G	5G	5G, 4G
Band Options	5G: n79	5G: n1 / n3 / n28 / n41 / n78 4G: LTE B1 / B3 / B7 / B8 / B28 / B38	5G: n48	5G: n1 / n3 / n28 / n41 / n48 / n77 / n78 4G: LTE B1 / B3 / B7 / B8 / B28 / B38
Number of SIMs	2			
Ethernet Interface				
10/100/1000BaseT(X) Ports (RJ45 Connector)	2			
Serial Interface				
No. of Ports	1			
Ethernet Software Features				
Management	LwM2M Client			
Firewall				
Filter	ICMP, IP address			
NAT				
Features	Port forwarding, VPN passthrough			
Power Parameters				
Input Voltage	9 to 24 VDC			
Physical Characteristics				
IP Rating	IP30 ¹			
Dimensions	100 x 125 x 35.2 mm (3.93 x 4.92 x 1.38 in)			
Environmental Limits				
Operating Temperature	-40 to 70°C (-40 to 158°F)			

¹ The rubber SIM cover and console port cover must be attached. For the CCG-1520-T model, the SMA protection cover must also be attached.

LTE Cellular Routers/Gateways



Product Series	OnCell 3120-LTE-1-AU	OnCell 3120-LTE-1-EU	OnCell 3120-LTE-1-US	OnCell G4302-LTE4-AU	OnCell G4302-LTE4-EU	OnCell G4302-LTE4-US	OnCell G4302-LTE4-JP	OnCell G4302-LTE4-GL	
Cellular Interface									
Cellular Standards	LTE Cat. 1, HSPA, UMTS, EDGE, GPRS, GSM			LTE Cat. 4, HSPA, UMTS, EDGE, GPRS, GSM					
Band Options	LTE: B1 / B3 / B5 / B8 / B9 / B18 / B19 / B26 / B28	LTE: B1 / B3 / B7 / B8 / B20 / B28A	LTE: B2 / B4 / B5 / B12 / B13 / B14 / B66 / B71	LTE: B1 / B3 / B5 / B7 / B8 / B28	LTE: B1 / B3 / B7 / B8 / B20 / B28	LTE: B2 / B4 / B5 / B12 / B13 / B14 / B25 / B26 / B66 / B71	LTE: B1 / B3 / B8 / B11 / B18 / B19 / B21	LTE: B1 / B2 / B3 / B4 / B5 / B7 / B8 / B12 / B13 / B14 / B20 / B25 / B26 / B28	
Number of SIMs	2								
GNSS Interface									
GNSS Bands	-			GPS (1575.42 MHz) GLONASS (1597.52 MHz) Galileo (1575.42 MHz) BeiDou (1561.098 MHz)					
Ethernet Interface									
10/100BaseT(X) Ports (RJ45 Connector)	2			-					
10/100/1000BaseT(X) Ports (RJ45 Connector)	-			2				8	
USB Interface									
No. of USB Ports	-				1				
Serial Interface									
No. of Ports	1								
Input/Output Interface									
Digital Output Channels	-			1					
Digital Input Channels	-			1					
Ethernet Software Features									
Management	GuaranLink, Power Management, LLDP, Syslog, MRC Quick Link			GuaranLink, Power Management, LLDP, Syslog, MXview One, MXconfig, MXsecurity, MRC Quick Link					
Filter	-			802.1Q VLAN, Port-based VLAN					
Routing	-			VRRP, OSPF, RIPv1/v2, Static Route					
IPsec VPN									
Concurrent VPN Tunnels	5			15					
Firewall									
Filter	ICMP, IP address, MAC address, Ports			DPI, DDoS, Ethernet protocols, ICMP, IP address, MAC address, Ports					
NAT									
Features	Port forwarding, NAT loopback			1-to-1, N-to-1, Port forwarding, NAT loopback, Double NAT					
Security Functions									
Hardware-based Security	-			Secure Boot					
Power Parameters									
Input Voltage	9 to 36 VDC			12 to 48 VDC					
Physical Characteristics									
IP Rating	IP30			IP40 ¹					
Dimensions	128.5 x 26 x 89.1 mm (5.06 x 1.02 x 3.51 in)			125 x 46.2 x 100 mm (4.92 x 1.82 x 3.94 in)				125 x 58.2 x 100 mm (4.92 x 2.29 x 3.94 in)	
Environmental Limits									
Operating Temperature	Standard models: 0 to 55°C (32 to 131°F) Wide temp. models: -30 to 70°C (-22 to 158°F)			Standard models: -10 to 55°C (14 to 131°F) Wide temp. models: -30 to 70°C (-22 to 158°F)					
Standards and Certifications									
Hazardous Locations	-			ATEX, IECEx, CID2				-	
Railway	-			EN 50121-4				-	
Traffic Control	-			NEMA TS2				-	
Road Vehicles	-			E-Mark E1				-	

¹ With the rubber SIM slot cover closed.

Ethernet Media Converters

Moxa's industrial Ethernet media converters provide reliable and stable conversion of Ethernet data to fiber-optic signals, even in harsh industrial environments.



Ethernet Media Converters
Product Pages



Chassis Media Converters

Our TRC Series of rackmount chassis media converters provides up to 19 slots and a wide selection of media converter modules to fulfill a variety of media conversion requirements in high-density applications.



Ethernet-to-Fiber Media Converters

We offer a wide selection of Ethernet-to-fiber media converters, from entry-level to industrial-grade, covering specific industries such as railway and power applications. They provide a cost-effective solution for your long-distance transmission requirements.

Chassis Media Converters



Product Series	TRC-2190	TRC-190	CSM-400	CSM-200	CSM-G200
Ethernet Interface					
10/100BaseT(X) (RJ45 Connector)	2	-	1	1	-
10/100/1000BaseT(X) (RJ45 Connector)	-	-	-	-	1
Optical Fiber	-	-	100BaseFX ports Multi-mode, Single-mode, WDM-A Single-mode, or WDM-B Single-mode SC connector or Multi-mode ST connector	100BaseFX ports Multi-mode or Single-mode SC connector or Single-mode ST connector	SFP connector
Typical Distance	-	-	Multi-mode: 4 km or 5 km Single-mode: 40 km WDM-A: 20 km WDM-B: 20 km	Multi-mode: 4 km or 5 km Single-mode: 40 km	Based on SFP module
Wavelength (Typical)	-	-	Multi-mode: 1300 nm Single-mode: 1310 nm WDM-A: 1310 or 1550 nm WDM-B: 1550 or 1310 nm	Multi-mode: 1300 nm Single-mode: 1310 nm	Based on SFP module
Optical Power (TX Range)	-	-	Multi-mode: -10 to -20 dBm Single-mode: 0 to -5 dBm WDM-A/WDM-B: -5 to -15 dBm	Multi-mode: -10 to -20 dBm Single-mode: 0 to -5 dBm	Based on SFP module
Optical Power (RX Range)	-	-	Multi-mode/WDM-A/ WDM-B: -3 to -32 dBm Single-mode: -3 to -34 dBm	Multi-mode: -3 to -32 dBm Single-mode: -3 to -34 dBm	Based on SFP module
Optical Power (Link Budget)	-	-	Multi-mode: 12 dB Single-mode: 29 dB WDM-A/WDM-B: 17 dB	Multi-mode: 12 dB Single-mode: 29 dB	Based on SFP module
Jumbo Frame Size	-			10 KB	
Power Parameters					
Input Voltage	AC models: 110 to 240 VAC DC models: 48 VDC Redundant dual inputs		12 VDC		
No. of Power Inputs	2		-		
Power Consumption	AC models: 1.5 A @ 100 to 240 VAC DC models: 3.2 A @ 48 VDC		220 mA @ 12 VDC	180 mA @ 12 VDC	185 mA @ 12 VDC
Physical Characteristics					
Dimensions	440 x 260 x 77 mm (18.6 x 11 x 3.3 in)	440 x 260 x 88 mm (17.32 x 10.24 x 3.46 in)	86.8 x 124.3 x 21 mm (3.42 x 4.89 x 0.83 in)		
Environmental Limits					
Operating Temperature	-20 to 55°C (-4 to 131°F)	0 to 60°C (32 to 140°F)	Standard models: -20 to 55°C (-4 to 131°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	0 to 55°C (32 to 131°F)	
Standards and Certifications					
EMC	EN 55032/35				
EMI	CISPR 32, FCC Part 15B Class A				
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV (AC), 1 kV (DC); Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV (AC), 1 kV (DC) IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV (AC), 1 kV (DC); Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF: 30 A/m
Environmental Testing	IEC 60068-2-1, IEC 60068-2-14, IEC 60068-2-2, IEC 60068-2-3				
Safety	UL 60950-1, UL 62368-1, EN IEC 62368-1				

Ethernet-to-Fiber Media Converters



Product Series	IMC-21	IMC-21A	IMC-21GA	IMC-101	IMC-101G	PTC-101	
Ethernet Interface							
10/100BaseT(X) Ports (RJ45 Connector)	1	1	-	1	-	1	
10/100/1000BaseT(X) Ports (RJ45 Connector)	-	-	1	-	1	-	
1000 Mbps Fiber (SFP Connector)	-	-	1	-	1	-	
Optical Fiber	100BaseFX Multi-mode or Single-mode SC connector or Multi-mode ST connector	100BaseFX ports Multi-mode or Single-mode SC connector or Multi-mode ST connector	100/1000BaseSFP slot or 100/1000BaseSX Multi-mode SC connector or 100/1000BaseLX Single-mode SC connector	100BaseFX ports Multi-mode SC or ST connector, Single-mode (40 km), or Single-mode (80 km) SC connector	1000BaseSFP slot	100BaseFX ports Multi-mode or Single-mode SC, ST, or LC connector	
Typical Distance	Multi-mode: 4 km or 5 km Single-mode: 40 km		1000BaseSX: 500 m 1000BaseLX: 10 km	Multi-mode: 4 km or 5 km Single-mode: 40 km or 80 km	40, 80, 110, or 120 km	Multi-mode: 5 km or 4 km Single-mode: 40 km	
Wavelength (Typical)	Multi-mode: 1300 nm Single-mode: 1310 nm		1000BaseSX: 850 nm 1000BaseLX: 1310 nm	Multi-mode: 1300 nm Single-mode: 1310 or 1550 nm	Based on SFP module	Multi-mode: 1300 nm Single-mode: 1310 nm	
Optical Power (TX Range)	Multi-mode: -10 to -20 dBm Single-mode: 0 to -5 dBm		1000BaseSX: -3 to -10 dBm 1000BaseLX: -3 to -9 dBm	Multi-mode: -10 to -20 dBm Single-mode: 0 to -5 dBm	Based on SFP module	Multi-mode: -10 to -20 dBm Single-mode: 0 to -5 dBm	
Optical Power (RX Range)	Multi-mode: -3 to -32 dBm Single-mode: -3 to -34 dBm		1000BaseSX: -3 to -20 dBm 1000BaseLX: -3 to -21 dBm	Multi-mode: -3 to -32 dBm Single-mode: -3 to -34 dBm	Based on SFP module	Multi-mode: -3 to -32 dBm Single-mode: -3 to -34 dBm	
Optical Power (Link Budget)	Multi-mode: 12 dB Single-mode: 29 dB		1000BaseSX: 10 dB 1000BaseLX: 12 dB	Multi-mode: 12 dB Single-mode: 29 dB	Based on SFP module	Multi-mode: 12 dB Single-mode: 29 dB	
Power Parameters							
Input Voltage	12 to 48 VDC			12 to 45 VDC	12 to 48 VDC	-LV models: 20 to 72 VDC -HV models: 100 to 240 VAC/VDC (85 to 264 VAC, 88 to 300 VDC)	
Physical Characteristics							
Dimensions	25 x 109 x 97 mm (0.98 x 4.29 x 3.82 in)	30 x 125 x 79 mm (1.19 x 4.92 x 3.11 in)	30 x 125 x 79 mm (1.19 x 4.92 x 3.11 in)	53.6 x 135 x 105 mm (2.11 x 5.31 x 4.13 in)		152.15 x 126.46 x 66.65 mm (5.99 x 4.86 x 2.62 in)	
Environmental Limits							
Operating Temperature	-10 to 60°C (14 to 140°F)	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)		Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)		-40 to 85°C (-40 to 185°F)	
Standards and Certifications							
EMC	EN 55032/35						
EMI	CISPR 32, FCC Part 15B Class A						
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF
Hazardous Locations	-			Standard models: CID2, ATEX Zone 2 -IEX models: CID2, ATEX Zone 2, IECEx		-	
Maritime	-			DNV		-	
Power Substation	-			-		IEC 61850-3	

Ethernet-to-Fiber Media Converters




Product Series	IMC-P101	IMC-P21A-G2	IMC-P21GA-G2
Ethernet Interface			
PoE Ports (10/100BaseT(X), RJ45 Connector)	1	1	–
PoE Ports (10/100/1000BaseT(X), RJ45 Connector)	–	–	1
100BaseFX Ports	1	1	–
1000 Mbps Fiber (SFP Connector)	–	–	1
Optical Fiber	100BaseFX ports Multi-mode or Single-mode SC or ST connector	100BaseFX ports Multi-mode or Single-mode SC connector or Multi-mode ST connector	100/1000BaseSFP slot or 1000BaseSX/LX Multi-mode or Single-mode SC connector
Typical Distance	Multi-mode: 5 km Single-mode: 40 km	Multi-mode: 2 to 5 km Single-mode: 40 km	Multi-mode: 550 m Single-mode: 10 km
Wavelength (Typical)	Multi-mode: 850 nm Single-mode: 1310 nm	Multi-mode: 1310 nm Single-mode: 1310 nm	Multi-mode: 850 nm Single-mode: 1310 nm
Optical Power (TX Range)	Multi-mode: 0 to -8 dBm Single-mode: 0 to -8 dBm	Multi-mode: -10 to -20 dBm Single-mode: 0 to -5 dBm	Multi-mode: -3 to -10 dBm Single-mode: -3 to 9 dBm
Optical Power (RX Range)	Multi-mode: 0 to -25 dBm Single-mode: 0 to -25 dBm	Multi-mode: -3 to -32 dBm Single-mode: -3 to -34 dBm	Multi-mode: -3 to -20 dBm Single-mode: -3 to -21 dBm
Optical Power (Link Budget)	Multi-mode: 12 dB Single-mode: 29 dB	Multi-mode: 12 dB Single-mode: 29 dB	Multi-mode: 10 dB Single-mode: 12 dB
Power Parameters			
Input Voltage	12 to 57 VDC (HW Rev. 1.1.0 and later) 46 to 57 VDC (HW Rev. 1.0.1 and prior)	44 to 57 VDC PoE+ output: > 52 VDC recommended PoE output: > 44 VDC recommended	
Physical Characteristics			
Dimensions	144.5 x 122.3 x 51.65 mm (5.69 x 4.81 x 2.03 in)	90 x 73 x 20.3 mm (3.54 x 2.87 x 0.79 in)	
Environmental Limits			
Operating Temperature	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	-10 to 60°C (14 to 140°F)	
Standards and Certifications			
EMC	EN 55032/35		
EMI	CISPR 32, FCC Part 15B Class A		
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 KHz to 80 MHz: 3 to 1 V IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz; Signal: 10 V IEC 61000-4-8 PFMF	
Vibration	IEC 60068-2-6	IEC 60068-2-6, IEC 60068-2-64	
Shock	IEC 60068-2-27		
Freefall	IEC-60068-2-31	ISTA 1A	

Network Management Software

Moxa's industrial network management software enables visibility for operational technology (OT), allowing network operators to make more informed decisions throughout network deployment, maintenance, and diagnostics. Visualization tools empower administrators and operators to quickly assess network status through event notifications, minimizing downtime. The featured modules and functions streamline management and enhance overall network efficiency.



Network Management Software Product Pages

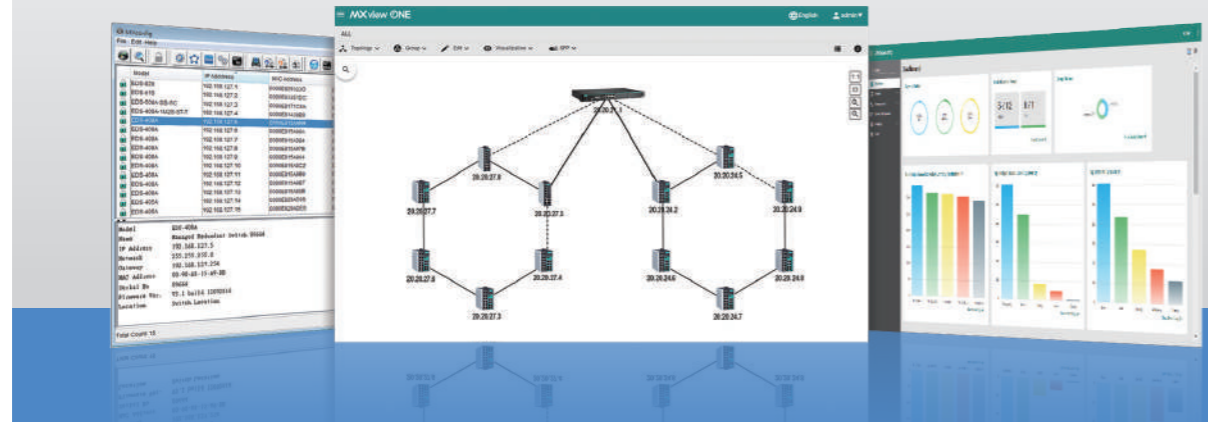


MXview One Central Manager

Centralized Platform for Managing and Monitoring Remote MXview One Sites

MXview One Central Manager offers administrators a centralized platform that automatically consolidates the status and events from all of their remote MXview One sites, providing comprehensive visibility.

- Intuitive dashboard to easily monitor site status
- Remotely view and access MXview One sites
- Real-time events and notifications
- Scheduled custom report generation
- Flexible license allocation and management

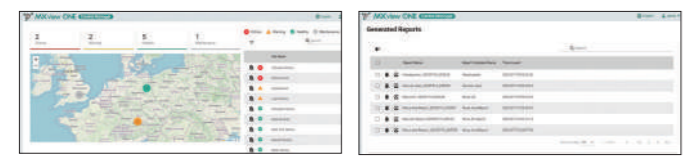

Dashboard and Map View

Reports

MXview One

Next-generation Scalable Industrial Network Management Platform



MXview One provides an integrated management platform that can discover networking devices and SNMP/IP devices installed across subnets. With comprehensive, real-time visibility of wired, wireless, and IEC 61850 substation networks, MXview One helps OT engineers simplify management of converged IT/OT networks and optimizes operations and availability throughout all stages of network deployment, management, and maintenance.

- Security View for checking the security level of network devices
- Dashboard with a complete network summary
- SFP fiber list for fiber link status and warnings
- Run scripts for mass configuration of devices
- Serial port monitoring for serial port event warnings
- Easy integration through RESTful API, web widget, and syslog for single-pane monitoring with other IT/OT applications
- User-defined third-party SNMP device plug-in to define OIDs monitored in MXview One
- Firmware management for firmware visibility and multi-mode upgrades

MXview Power

Add-on Tailored for Power Networks

- Visibility of PRP/HSR dual LAN topologies
- Instant visibility of GOOSE messages for troubleshooting
- Automatic scanning and detection of unauthorized IEDs

MXview Wireless

Add-on Tailored for Wireless Networks

- Dynamic topology view for Wi-Fi networks
- Client roaming playback for troubleshooting
- Device dashboards and performance charts for wireless devices

MXview Security

Add-on Tailored for Network Security


- Centrally manage and deploy firewall policies, IPS patterns, and cybersecurity packages
- Cybersecurity event monitoring and customizable notifications
- At-a-glance cybersecurity event dashboard

MXconfig Industrial Network Configuration Tool

Mass Configuration to Reduce Setup and Maintenance Costs

Moxa's MXconfig is a comprehensive Windows-based utility that is used to install, configure, and maintain multiple Moxa devices on industrial networks. MXconfig gives device installers and control engineers a powerful and easy way to mass configure devices while effectively reducing setup and maintenance costs.

- Set the IP addresses of multiple devices with one click
- Configure redundant protocols and VLAN settings
- Modify the network configurations of multiple Moxa devices
- Upload firmware to multiple devices
- Set up security-related parameters with the Security Wizard in just a few clicks

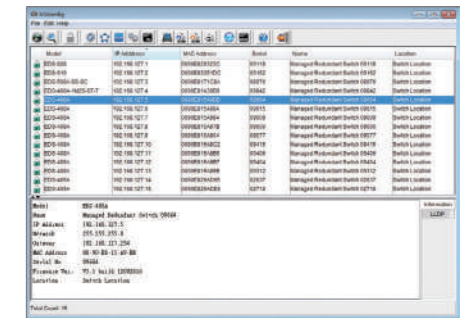

MXsecurity Industrial Network Security Management Software


Mass Deployment of Policy Rules, IPS Patterns, and Cyberthreat Monitoring

MXsecurity is cybersecurity management software for Moxa secure routers and firewall devices, designed to help Operational Technology (OT) users save time when deploying firewall rules while reducing the risk of misconfiguration. Featuring an easy-to-understand dashboard that visualizes cyberthreats, MXsecurity streamlines network security management.


- At-a-glance dashboard for cyberthreat events
- Centralized deployment of secure router firewall policies, firmware, configurations, and IPS signatures
- Automatic IPS pattern upgrades from the Moxa firmware server¹
- Real-time alerts with email notifications
- Map View for real-time location monitoring
- Scheduled batch deployment and reports




MXsecurity

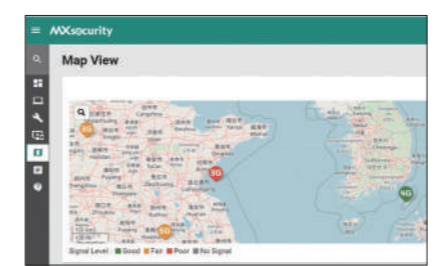

Map View

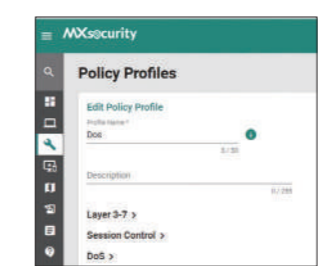

Policy Management and Event Logs

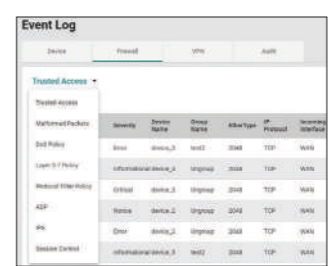

¹ This function requires an active IPS license.

Secure Remote Access

Moxa Remote Connect gives you a secure, easy-to-deploy, flexible, and scalable remote access solution that enables you to remotely configure, maintain, and troubleshoot your devices. It empowers machine builders by creating new business models for them to expand their services and keep their customers satisfied.



Secure Remote Access
Product Pages



Moxa Remote Connect Suite

Effortless Access to Your Remote Equipment

Moxa Remote Connect (MRC) is a convenient, secure, and versatile networking solution designed to seamlessly bridge field devices and engineers together over the Internet for industrial applications.

Moxa Remote Connect Suite consists of three primary components:

- 1. MRC Server:** A secure cloud-based remote access platform. This centralized connection management platform handles security levels, user privileges, and configuration of the MRC Gateway and MRC Client.
- 2. MRC Gateway:** A Moxa device that supports MRC functionality, allowing secure remote access to LAN devices via the MRC Client.
- 3. MRC Client:** Windows software enabling engineers to connect to remote devices from their PCs.

Highlights

- User-friendly experience that doesn't require specialized IT knowledge
- Provides scalable solutions for distributed applications, capable of supporting expansion to thousands of devices
- Integrates easily with existing security policies to minimize configuration workload
- Simultaneous connections to multiple field machines through a virtual IP mapping scheme
- Secure on-demand access control, managed centrally or by remote site operators, with configurable connection times
- Supports international applications by choosing the most efficient connection pathways and point-to-point connections



User Scenarios

The MRC Suite supports multiple connection types and provides numerous benefits. Below are three examples where the Moxa Remote Connect Suite can benefit engineers and businesses.

◆ On-demand Remote Maintenance, Diagnosis, and Troubleshooting

To minimize security issues and reduce costs, Moxa Remote Connect allows engineers to establish remote connections only when necessary.



◆ Remote Monitoring Minimizes On-site Maintenance

Moxa Remote Connect helps engineers monitor the status of equipment operating at remote sites. This capability allows engineers to make adjustments to settings remotely, reducing the need for site visits to troubleshoot and fix issues locally.



◆ LAN-like Site-to-site Secure Network Infrastructure

Moxa Remote Connect enables communication between different machines even if equipment is not in the same location. With MRC, equipment can communicate as though it were communicating over a local area network (LAN).



Product Portfolio

MRC Gateway

A Moxa device that supports MRC functionality, allowing LAN devices at remote sites to be accessed securely by a MRC Client.



- Remote connection control managed by inserting a USB or digital input signal
- Configurable remote access permissions based on client and application
- Each gateway supports up to 25 LAN devices



MRC Server

Cloud-based connection management platform that provides a centralized management portal for users.



- Supports device and permission grouping for multi-client device management
- Includes a 3-year free basic connection service
- Two-factor login authentication



MRC Client

Software to connect engineers to the MRC Gateway enabling them to perform remote troubleshooting and maintenance tasks.



- Windows-based connectivity and control software
- Supports Microsoft Windows 10 (32/64-bit)
- Download for free from Moxa's website

Network Security Appliance

Moxa's Network Security Appliances are designed to protect your critical industrial assets from industrial cybersecurity threats with OT/IT integrated cybersecurity technologies such as OT-centric Deep Packet Inspection (DPI) and Intrusion Prevention System (IPS).



Network Security Appliance
Product Pages


OT/IT Integrated Security

Protect OT Assets From Cyberthreats and Mitigate Cyber-risks

Moxa's Network Security Appliance products help protect industrial networks from intruders and unwanted traffic. Network Security Appliances are specifically designed to secure industrial networks from both an Operational Technology (OT) and Information Technology (IT) perspective to better address the surging market demand for comprehensive cybersecurity solutions for industrial networks. Moxa's solution includes critical IT cybersecurity technologies such as an Intrusion Prevention System (IPS), a key component for defense-in-depth strategies, specifically tailored to protect OT networks from cyberthreats without disrupting industrial operations.

- **EDR-G9010/8010:** Secure router combo switch and firewall, provides routing between different networks and VPN for secure remote access.
- **EDF-G1002-BP:** Industrial next-generation LAN firewall, protects critical assets against horizontal cyberthreats inside the LAN network.
- **MXsecurity:** Network security management software, provides central management of Moxa's industrial network security products with visibility of critical assets, network analysis, and pattern updates.

Defend Industrial Networks at All Levels

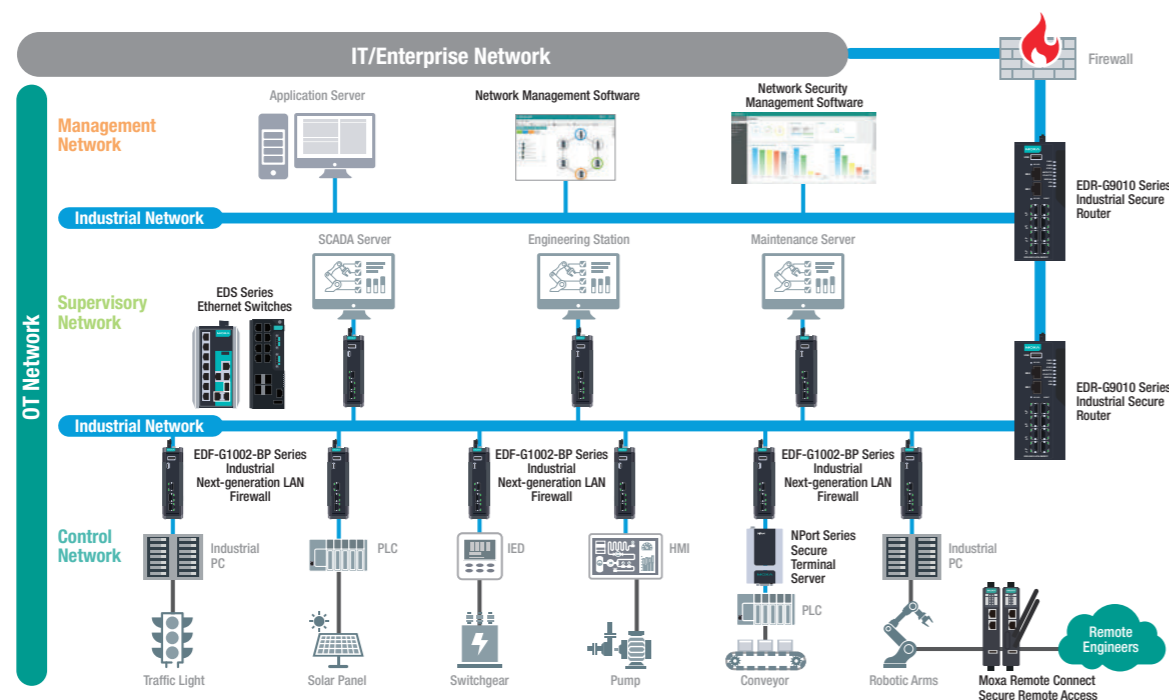

EDF-G1002-BP Industrial Next-generation LAN Firewall



Highlights

- Out-of-band management port minimizes installation impact
- Software-configurable Gen3 LAN Bypass prevents single point of failure
- Industrial-grade Intrusion Prevention/Detection System (IPS/IDS)
- Examine industrial protocol data with Deep Packet Inspection (DPI) technology
- Stateful firewall protects critical assets
- Supports Secure Boot for checking system integrity
- Check firewall settings with the intelligent Security Check feature
- -40 to 75°C operating temperature range (-T model)
- Supports conformal coating (-CT model)

Introduction

The EDF-G1002-BP Series is an industrial-grade LAN firewall with IPS and DPI functions to protect mission-critical assets and zones, specifically for intra-LAN east-west communications. These industrial firewalls provide software-configurable Gen3 LAN bypass functions to achieve bump-in-the-wire installation and minimize the installation impact for industrial applications, such as ITS, pump-and-treat systems in water stations, distributed control systems in oil and gas, and PLC/SCADA systems in factory automation.

Intrusion Prevention System (IPS)

The EDF-G1002-BP features IPS functions allowing you to apply virtual patches for vulnerabilities in legacy devices and protecting against abnormal web threats.




EDF-G1002-BP Series
Industrial Next-generation LAN Firewall

Deep Packet Inspection (DPI)

The EDF-G1002-BP extends DPI to the following OT protocols to filter content and help mission-critical infrastructure fend off malicious traffic:

- Modbus TCP
- DNP3
- IEC 60870-5-104
- IEC 61850 MMS
- Siemens S7 Comm
- Omron FINS
- EtherNet/IP
- OPC UA
- Melsec
- Siemens S7 Comm Plus

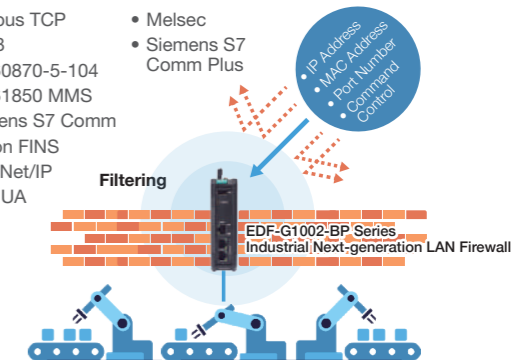

Serial Device Servers

With a portfolio of over 500 serial connectivity products, Moxa has been committed to providing reliable industrial solutions for device connectivity since 1987. As a worldwide industry leader, our portfolio includes products with industry-specific certifications for harsh environments, rail applications, intelligent transportation systems, and power automation.



Serial Device Servers
Product Pages



Secure Terminal Servers

Moxa's terminal servers have specialized functions for serial communication and cybersecurity features, which enable the establishment of secure and reliable terminal connections to networks. The terminal servers connect a variety of devices, including terminals, modems, data switches, mainframe computers, and POS devices, making them accessible to network hosts and processes.



Combo Switch / Serial Device Servers

Moxa's NPort S8000 Series combines a serial device server and a full-function managed Ethernet switch, allowing you to save space in your cabinet, reduce overall power consumption, and lower costs by eliminating the need to purchase and deploy separate devices.



Substation-level Device Servers

The NPort S9000 Series device servers come with a built-in full-function managed Ethernet switch, and they are specifically designed for the harsh environmental conditions found in electrical substations.



Railway Device Servers

The NPort 5000AI-M12 complies with EN 50121-4 and all mandatory sections of EN 50155, covering operating temperature, power input voltage, surge, ESD, and vibration, making it suitable for rolling stock and wayside applications.



General-purpose Device Servers

Our NPort device servers make your serial devices network-ready in an instant. This series offers 1- to 16-port options, making the device servers ideal for connecting devices such as power meters and serial instruments to an IP-based Ethernet LAN, from lightweight remote site applications to high-density cabinet/rack systems.




Industrial-grade Device Servers

These industrial device servers offer enhanced surge protection and reliable serial-to-Ethernet connectivity when operating in harsh environments, such as oil and gas, power automation, and marine.



Wireless Device Servers

Our wireless device servers are the ideal choice for connecting your serial or Ethernet devices—such as PLCs, meters, and sensors—to a wireless network, avoiding the hassle of running a network cable to each device.

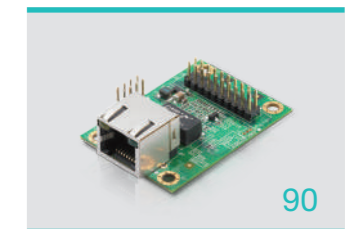

Embedded Device Servers

Moxa's embedded serial-to-Ethernet device server modules are compact, power-efficient, and easy to integrate.

Secure Terminal Servers




Product Series	NPort 6150-G2	NPort 6250-G2	NPort 6150	NPort 6250	NPort 6250-M-SC	NPort 6250-S-SC
Ethernet Interface						
10/100Base(TX) Ports (RJ45 Connector)	1	1	1	1	-	-
100BaseFX Ports (Multi-mode SC Connector)	-	-	-	-	1	-
100BaseFX Ports (Single-mode SC Connector)	-	-	-	-	-	1
Ethernet Software Features						
Configuration Options	Web Console (HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console		Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console, Telnet/SSH Console			
Management	ARP, DHCP Client, DNS, HTTPS, ICMP, IPv4/IPv6, SMTP/SMTPTS, SNMPv1/v2c/v3, SNTP, TCP/IP, UDP, WINS		ARP, BOOTP, DHCP Client, DNS, HTTP, ICMP, IPv4/IPv6, LLDP, PPPoE, SMTP, SNMPv1/v2c/v3, SNTP, TCP/IP, Telnet, UDP			
Windows Real COM Drivers	Windows 11/10/8.1/8/7 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2		Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded			
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x		Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x			
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x		macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6.x, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X			
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x 4.x, macOS 26, 15, 14, 13, 12, 11					
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)					
Android API	-		Android 3.1.x and later			
Unicast Routing	RIPV1/V2, Static Route					
Security Functions						
Root of Trust	Secure Boot, True Random Number Generator (TRNG), Security Screws		-			
Authentication	Local database, RADIUS, TACACS+					
Encryption	HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, CHACHA20, SHA-256, SHA-384, HMAC SSH: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, AES-128, AES-256, SHA-256, SHA-384, HMAC SNMPv3: AES-128, SHA-256, SHA-384 Secure OP mode: HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, CHACHA20, SHA-256, SHA-384, HMAC Config Import/Export: AES-256, SHA-256, HMAC		HTTPS, AES-128, AES-256, HMAC, RSA-1024, SHA-1, SHA-256, SHA-384			
Security Protocols	HTTPS (TLS v1.2/v1.3), SNMPv3, SSHv2		HTTPS (TLS 1.2), SNMPv3, SSHv2			
Serial Interface						
Connector	DB9 male					
No. of Ports	1	2	1	2		
Serial Standards	RS-232, RS-422, RS-485					
Secure Operation Modes	Reverse SSH, Secure Pair Connection, Secure Real COM, Secure TCP Client, Secure TCP Server, SSH					
Standard Operation Modes	Disabled, Pair Connection, PPP, Real COM, Reverse Terminal, RFC2217, TCP Client, TCP Server, Terminal, UDP		Disabled, Ethernet Modem, Pair Connection, PPP, Printer, Real COM, Reverse Telnet, RFC2217, TCP Client, TCP Server, Terminal, UDP			
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)					
Flow Control	None, RTS/CTS, DTR/DSR, RTS Toggle, XON/XOFF					
Power Parameters						
Input Current	160 mA (max.)		285 mA @ 12 to 48 VDC		430 mA @ 12 to 48 VDC	
Input Voltage	12 to 48 VDC					
Physical Characteristics						
Dimensions (Without Ears)	64 x 111.8 x 25 mm (2.52 x 4.4 x 0.98 in)	76.3 x 122.4 x 25 mm (3 x 4.82 x 0.98 in)	67 x 100.4 x 29 mm (2.64 x 3.95 x 1.1 in)	77 x 111 x 29 mm (3.30 x 4.37 x 1.1 in)		
Installation	Desktop, DIN-rail mounting (with optional kit), Wall mounting, Side-mounting (with optional kit)		Desktop, DIN-rail mounting (with optional kit), Wall mounting			
Environmental Limits						
Operating Temperature	-10 to 60 °C (14 to 140°F)		0 to 55°C (32 to 131°F)			
Storage Temperature (Package Included)	-40 to 75°C (-40 to 167°F)					
Standards and Certifications						
EMC	EN 55032/35					
EMI	CISPR 32, FCC Part 15B Class A					
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11					
Cybersecurity	IEC 62443-4-2 Security Level 2, JC-STAR Level 1		-			
Safety	IEC 62368-1, UL 62368-1, EN 62368-1		UL 60950-1, UL 62368-1			
MTBF						
Time	3,843,653 hrs	3,351,651 hrs	1,934,102 hrs	1,606,182 hrs	1,526,091 hrs	1,526,091 hrs
Standards	Telcordia (Bellcore) Standard TR/SR					

Secure Terminal Servers



Product Series	NPort 6450-G2	NPort 6450-2TX-G2	NPort 6450-2M-SC-G2-T	NPort 6450-2S-SC-G2-T	NPort 6450	
Ethernet Interface						
10/100Base(TX) Ports (RJ45 Connector)	1	3	1	1	1	
100BaseFX Ports (Multi-mode SC Connector)	-	-	2	-	-	
100BaseFX Ports (Single-mode SC Connector)	-	-	-	2	-	
Compatible Modules	-	-	-	-	NM expansion modules TX/FX extension	
Ethernet Software Features						
Configuration Options	Web Console (HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console				Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console, Telnet/SSH Console	
Management	ARP, DHCP Client, DNS, HTTPS, ICMP, IPv4/IPv6, SMTP/SMTPTS, SNMPv1/v2c/v3, SNTP, TCP/IP, UDP, WINS				ARP, BOOTP, DHCP Client, DNS, HTTP, ICMP, IPv4/IPv6, LLDP, PPPoE, SMTP, SNMPv1/v2c/v3, SNTP, TCP/IP, Telnet, UDP	
Windows Real COM Drivers	Windows 11/10/8.1/8/7 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2				Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded	
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x				Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x	
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11				macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6.x, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X	
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x 4.x, macOS 26, 15, 14, 13, 12, 11					
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)					
Android API	-				Android 3.1.x and later	
Unicast Routing	RIPV1/V2, Static Route					
Security Functions						
Root of Trust	Secure Boot, True Random Number Generator (TRNG), Security Screws				-	
Authentication	Local database, RADIUS, TACACS+					
Encryption	HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, CHACHA20, SHA-256, SHA-384, HMAC SSH: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, AES-128, AES-256, SHA-256, SHA-384, HMAC SNMPv3: AES-128, SHA-256, SHA-384 Secure OP mode: HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, CHACHA20, SHA-256, SHA-384, HMAC Config Import/Export: AES-256, SHA-256, HMAC				HTTPS, AES-128, AES-256, HMAC, RSA-1024, SHA-1, SHA-256, SHA-384	
Security Protocols	HTTPS (TLS v1.2/v1.3), SNMPv3, SSHv2				HTTPS (TLS 1.2), SNMPv3, SSHv2	
Serial Interface						
Connector	DB9 male					
No. of Ports	4					
Serial Standards	RS-232, RS-422, RS-485					
Secure Operation Modes	Reverse SSH, Secure Pair Connection, Secure Real COM, Secure TCP Client, Secure TCP Server, SSH					
Standard Operation Modes	Disabled, Pair Connection, PPP, Real COM, Reverse Terminal, RFC2217, TCP Client, TCP Server, Terminal, UDP				Disabled, Ethernet Modem, Pair Connection, PPP, Printer, Real COM, Reverse Telnet, RFC2217, TCP Client, TCP Server, Terminal, UDP	
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)					
Flow Control	None, RTS/CTS, DTR/DSR, RTS Toggle, XON/XOFF					
Power Parameters						
Input Current	373 mA (max.)				730 mA @ 12 VDC	
Input Voltage	12 to 48 VDC					
Physical Characteristics						
Dimensions (Without Ears)	158 x 114.4 x 30 mm (6.22 x 4.5 x 1.18 in)				158 x 103 x 35 mm (6.22 x 4.06 x 1.38 in)	
Installation	Desktop, DIN-rail mounting (with optional kit), Wall mounting					
Environmental Limits						
Operating Temperature	-10 to 60 °C (14 to 140°F)		-40 to 75°C (-40 to 167°F)		0 to 55°C (32 to 131°F)	
Storage Temperature (Package Included)	-40 to 75°C (-40 to 167°F)					
Standards and Certifications						
EMC	EN 55032/35					
EMI	CISPR 32, FCC Part 15B Class A					
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11					
Cybersecurity	IEC 62443-4-2 Security Level 2, JC-STAR Level 1				-	
Safety	IEC 62368-1, UL 62368-1, EN 62368-1				UL 60950-1	
MTBF						
Time	29,716 hrs	29,713 hrs	2,664,601 hrs		850,905 hrs	
Standards	Telcordia Standard SR332, Telcordia Issue 4					

Secure Terminal Servers



Product Series	NPort 6610-8/-16/-32-G2	NPort 6650-8/-16/-32-G2	NPort 6610-8/-16/-32	NPort 6650-8/-16/-32
Input/Output Interface	Resistive load: 1 A @ 24 VDC			
Alarm Contact Channels				
Ethernet Interface				
10/100BaseT(X) Ports (RJ45 Connector)	-		1 (Auto MDI/MDI-X connection)	
10/100/1000BaseT(X) Ports (RJ45 Connector)	2 (Auto MDI/MDI-X connection)		-	
Compatible Modules	NM expansion modules TX/FX/SFP extension		NM expansion modules TX/FX extension	
Ethernet Software Features				
Configuration Options	Web Console (HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console		Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console, Telnet/SSH Console	
Management	ARP, DHCP Client, DNS, HTTPS, ICMP, IPv4/IPv6, SMTP/SMTPTS, SNMPv1/v2c/v3, SNMP, TCP/IP, UDP, WINS		ARP, BOOTP, DHCP Client, DNS, HTTP, ICMP, IPv4/IPv6, LLDP, PPPoE, SMTP, SNMPv1/v2c/v3, SNMP, TCP/IP, Telnet, UDP	
Windows Real COM Drivers	Windows 11/10/8.1/8/7 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2		Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded	
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x		Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x	
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x		macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6.x, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X	
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x 4.x, macOS 26, 15, 14, 13, 12, 11			
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)			
Android API	-			
Unicast Routing	RIPV1/V2, Static Route			
Security Functions				
Root of Trust	Secure Boot, True Random Number Generator (TRNG), Security Screws		-	
Authentication	Local database, RADIUS, TACACS+		Local database, RADIUS, TACACS+	
Encryption	HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, CHACHA20, SHA-256, SHA-384, HMAC SSH: ECC-256, ECC-384, ECC-521, RSA-2048, AES-128, AES-256, SHA-256, SHA-384, HMAC SNMPv3: AES-128, SHA-256, SHA-384 Secure OP mode: HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, CHACHA20, SHA-256, SHA-384, HMAC Config Import/Export: AES-256, SHA-256, HMAC		HTTPS, AES-128, AES-256, HMAC, RSA-1024, SHA-1, SHA-256, SHA-384	
Security Protocols	HTTPS (TLS v1.2/v1.3), SNMPv3, SSHv2		HTTPS (TLS 1.2), SNMPv3, SSHv2	
Serial Interface	8-pin RJ45			
Connector	8-pin RJ45			
No. of Ports	NPort 6610-8-G2 models: 8 NPort 6610-16-G2 models: 16 NPort 6610-32-G2 models: 32	NPort 6650-8-G2 models: 8 NPort 6650-16-G2 models: 16 NPort 6650-32-G2 models: 32	NPort 6610-8 models: 8 NPort 6610-16 models: 16 NPort 6610-32 models: 32	NPort 6650-8 models: 8 NPort 6650-16 models: 16 NPort 6650-32 models: 32
Serial Standards	RS-232		RS-232, RS-422, RS-485	
Secure Operation Modes	Reverse SSH, Secure Pair Connection, Secure Real COM, Secure TCP Client, Secure TCP Server, SSH			
Standard Operation Modes	Disabled, Pair Connection, PPP, Real COM, Reverse Terminal, RFC2217, TCP Client, TCP Server, Terminal, UDP		Disabled, Ethernet Modem, Pair Connection, PPP, Printer, Real COM, Reverse Telnet, RFC2217, TCP Client, TCP Server, Terminal, UDP	
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)			
Console Port	RS-232 (Tx/D, Rx/D, GND), 8-pin RJ45 (19200, n, 8, 1)			
Flow Control	None, RTS/CTS, DTR/DSR, RTS Toggle, XON/XOFF			
Power Parameters				
Input Current	320 mA (max.)		NPort 6610-8 models: 140 mA @ 100 VAC NPort 6610-16 models: 192 mA @ 100 VAC NPort 6610-32 models: 285 mA @ 100 VAC	NPort 6650-8 models: 140 mA @ 100 VAC NPort 6650-16 models: 192 mA @ 100 VAC NPort 6650-32 models: 285 mA @ 100 VAC
Input Voltage	100 to 240 VAC, 47 to 63 Hz			
Physical Characteristics				
Dimensions (Without Ears)	440 x 200 x 43.65 mm (17.32 x 7.87 x 1.72 in)		440 x 195 x 44 mm (17.32 x 7.68 x 1.73 in)	
Installation	Desktop, Rack mounting (mounting kit included)			
Environmental Limits				
Operating Temperature	-10 to 60 °C (14 to 140°F)		0 to 55°C (32 to 131°F)	
Storage Temperature (Package Included)	-40 to 75°C (-40 to 167°F)			
Standards and Certifications				
EMC	EN 55032/35			
EMI	CISPR 32, FCC Part 15B Class A			
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11		IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m, IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV, IEC 61000-4-5 Surge: Power: 1 kV, IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m, IEC 61000-4-8 PFMF	
Cybersecurity	IEC 62443-4-2 Security Level 2, JC-STAR Level 1			
Safety	IEC 62368-1, UL 62368-1, EN 62368-1		UL 60950-1	
MTBF				
Time	NPort 6610-8-G2 models: 29,613 hrs NPort 6610-16-G2 models: 29,517 hrs NPort 6610-32-G2 models: 29,045 hrs	NPort 6650-8-G2 models: 29,515 hrs NPort 6650-16-G2 models: 29,321 hrs NPort 6650-32-G2 models: 29,045 hrs	NPort 6610-8 models: 135,891 hrs NPort 6610-16 models: 102,373 hrs NPort 6610-32 models: 68,707 hrs	NPort 6650-8 models: 636,600 hrs NPort 6650-16 models: 439,673 hrs NPort 6650-32 models: 310,078 hrs
Standards	Telcordia Standard SR332, Telcordia Issue 4		Telcordia (Bellcore) Standard	

Secure Terminal Servers



Product Series	NPort 6650-8/-16/-32-48V-G2	NPort 6610-8/-16/-32-48V	NPort 6650-8/-16/-32-48V	NPort 6650-8/-16/-32-HV-T
Ethernet Interface				
10/100BaseT(X) Ports (RJ45 Connector)	-	1	1	1
10/100/1000BaseT(X) Ports (RJ45 Connector)	2	-	-	-
Compatible Modules	NM expansion modules TX/FX/SFP extension		NM expansion modules TX/FX extension	
Ethernet Software Features				
Configuration Options	Web Console (HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console		Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console, Telnet/SSH Console	
Management	ARP, DHCP Client, DNS, HTTPS, ICMP, IPv4/IPv6, LLDP, PPPoE, SMTP, SNMPv1/v2c/v3, SNMP, TCP/IP, UDP, WINS		ARP, BOOTP, DHCP Client, DNS, HTTP, ICMP, IPv4/IPv6, LLDP, PPPoE, SMTP, SNMPv1/v2c/v3, SNMP, TCP/IP, Telnet, UDP	
Windows Real COM Drivers	Windows 11/10/8.1/8/7 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2		Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded	
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x		Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x	
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x		macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6.x, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X	
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x 4.x, macOS 26, 15, 14, 13, 12, 11			
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)			
Android API	-			
Unicast Routing	RIPV1/V2, Static Route			
Security Functions				
Root of Trust	Secure Boot, True Random Number Generator (TRNG), Security Screws		-	
Authentication	Local database, RADIUS, TACACS+		Local database, RADIUS, TACACS+	
Encryption	HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, CHACHA20, SHA-256, SHA-384, HMAC SSH: ECC-256, ECC-384, ECC-521, RSA-2048, AES-128, AES-256, SHA-256, SHA-384, HMAC SNMPv3: AES-128, SHA-256, SHA-384 Secure OP mode: HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, CHACHA20, SHA-256, SHA-384, HMAC Config Import/Export: AES-256, SHA-256, HMAC		HTTPS, AES-128, AES-256, HMAC, RSA-1024, SHA-1, SHA-256, SHA-384	
Security Protocols	HTTPS (TLS v1.2/v1.3), SNMPv3, SSHv2		HTTPS (TLS 1.2), SNMPv3, SSHv2	
Serial Interface	8-pin RJ45			
Connector	8-pin RJ45			
No. of Ports	NPort 6600-8-G2 models: 8 NPort 6600-16-G2 models: 16 NPort 6600-32-G2 models: 32	NPort 6600-8 models: 8 NPort 6600-16 models: 16 NPort 6600-32 models: 32	NPort 6600-8 models: 8 NPort 6600-16 models: 16 NPort 6600-32 models: 32	NPort 6600-8 models: 8 NPort 6600-16 models: 16 NPort 6600-32 models: 32
Serial Standards	RS-232, RS-422, RS-485		RS-232, RS-422, RS-485	
Secure Operation Modes	Reverse SSH, Secure Pair Connection, Secure Real COM, Secure TCP Client, Secure TCP Server, SSH			
Standard Operation Modes	Disabled, Pair Connection, PPP, Real COM, Reverse Terminal, RFC2217, TCP Client, TCP Server, Terminal, UDP		Disabled, Ethernet Modem, Pair Connection, PPP, Printer, Real COM, Reverse Telnet, RFC2217, TCP Client, TCP Server, Terminal, UDP	
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)			
Flow Control	None, RTS/CTS, DTR/DSR, RTS Toggle, XON/XOFF			
Power Parameters				
Input Current	340 mA (max.)		285 mA (max.)	
Input Voltage	±48 VDC (20 to 72 VDC, -20 to -72 VDC)			
Physical Characteristics				
Dimensions (Without Ears)	440 x 200 x 43.65 mm (17.32 x 7.87 x 1.72 in)		440 x 195 x 44 mm (17.32 x 7.68 x 1.73 in)	
Installation	Desktop, Rack mounting (mounting kit included)			
Environmental Limits				
Operating Temperature	-10 to 60 °C (14 to 140°F)		0 to 55°C (32 to 131°F)	
Storage Temperature (Package Included)	-40 to 75°C (-40 to 167°F)			
Standards and Certifications				
EMC	EN 55032/35			
EMI	CISPR 32, FCC Part 15B Class A			
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m, IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV, IEC 61000-4-5 Surge: Power: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m, IEC 61000-4-8 PFMF		IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m, IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV, IEC 61000-4-5 Surge: Power: 1 kV, IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m, IEC 61000-4-8 PFMF	
Cybersecurity	IEC 62443-4-2 Security Level 2, JC-STAR Level 1			
Safety	IEC 62368-1, UL 62368-1, EN 62368-1		UL 60950-1	
MTBF				
Time	NPort 6650-8-48V-G2 models: 29,514 hrs NPort 6650-16-48V-G2 models: 29,321 hrs NPort 6650-32-48V-G2 models: 29,045 hrs	NPort 6610-8-48V models: 674,093 hrs NPort 6610-16-48V models: 506,600 hrs NPort 6610-32-48V models: 373,508 hrs	NPort 6650-8-48V models: 559,008 hrs NPort 6650-16-48V models: 387,291 hrs NPort 6650-32-48V models: 256,541 hrs	NPort 6650-8-HV-T models: 501,171 hrs NPort 6650-16-HV-T models: 380,006 hrs NPort 6650-32-HV-T models: 290,914 hrs
Standards	Telcordia Standard SR332, Telcordia Issue 4		Telcordia (Bellcore) Standard	

Secure Terminal Servers



Product Series	NPort 6610-8/-16/-32-2AC-G2	NPort 6650-8/-16/-32-2AC-G2	CN2610-8/-16-2AC	CN2650-8/-16	CN2650-8/-16-2AC
Ethernet Interface					
10/100BaseT(X) Ports (RJ45 Connector)	-		2		
10/100/1000BaseT(X) Ports (RJ45 Connector)	2		-		
Compatible Modules	NM expansion modules TX/FX/SFP extension		-		
Ethernet Software Features					
Configuration Options	Web Console (HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console		Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility (DSU), Serial Console, Telnet Console		
Management	ARP, DHCP Client, DNS, HTTPS, ICMP, IPv4/IPv6, SMTP/SMTSPS, SNMPv1/v2c/v3, SNTP, TCP/IP, UDP, WINS		ARP, BOOTP, DDNS, DHCP Client, DNS, HTTP, IPv4, SMTP, SNMPv1/v2c/v3, TCP/IP, Telnet, UDP, ICMP, SLIP		
Windows Real COM Drivers	Windows 11/10/8.1/8/7 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2		Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded		
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x		Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x		
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x		macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X		
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)				
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11				
Android API	-		Android 3.1.x and later		
Unicast Routing	RIPv1/V2, Static Route				
Security Functions					
Root of Trust	Secure Boot, True Random Number Generator (TRNG), Security Screws		-		
Authentication	Local database, RADIUS, TACACS+		Local database (password only), RADIUS		
Encryption	HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, CHACHA20, SHA-256, SHA-384, HMAC SSH: ECC-256, ECC-384, ECC-521, RSA-2048, AES-128, AES-256, SHA-256, SHA-384, HMAC SNMPv3: AES-128, SHA-256, SHA-384 Secure OP mode: HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, CHACHA20, SHA-256, SHA-384, HMAC Config Import/Export: AES-256, SHA-256, HMAC		HTTPS, AES-128, AES-256, HMAC, RSA-1024, SHA-1		
Security Protocols	HTTPS (TLS v1.2/v1.3), SNMPv3, SSHv2		SNMPv3, SSHv2		
Serial Interface					
Connector	8-pin RJ45		8-pin RJ45		
No. of Ports	8/16/32		8/16		
Serial Standards	RS-232		RS-232, RS-422, RS-485		
Secure Operation Modes	Reverse SSH, Secure Pair Connection, Secure Real COM, Secure TCP Client, Secure TCP Server, SSH, Secure Redundant COM (with NM modules installed)		-		
Standard Operation Modes	Disabled, Pair Connection, PPP, Real COM, Reverse Terminal, RFC2217, TCP Client, TCP Server, Terminal, UDP, Redundant COM (with NM modules installed)		Real COM mode, TCP Server mode, TCP Client mode, UDP mode, RFC2217 mode, Terminal mode, Reverse Telnet mode, PPP mode, DRDAS mode, Redundant COM mode, Disabled		
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)		50 bps to 921.6 kbps		
Flow Control	None, RTS/CTS, DTR/DSR, RTS Toggle, XON/XOFF		None, RTS/CTS, DTR/DSR, XON/XOFF		
Power Parameters					
No. of Power Inputs	2		2		2
Input Current	320 mA (max.)		130 mA @ 110 VAC		200 mA @ 88 VDC
Input Voltage	100 to 240 VAC (50/60 Hz)		100 to 240 VAC (50/60 Hz)		
Physical Characteristics					
Dimensions (Without Ears)	440 x 200 x 43.65 mm (17.32 x 7.87 x 1.72 in)		440 x 198 x 45.5 mm (17.32 x 7.80 x 1.77 in)		
Installation	Desktop, Rack mounting (mounting kit included)				
Environmental Limits					
Operating Temperature	-10 to 60°C (14 to 140°F)		0 to 55°C (32 to 131°F)		
Storage Temperature (Package Included)	-40 to 75°C (-40 to 167°F)		0 to 55°C (32 to 131°F)		
Standards and Certifications					
EMC	EN 55032/35				
EMI	CISPR 32, FCC Part 15B Class A				
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11		IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2.5 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF IEC 61000-4-11		IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2.5 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF IEC 61000-4-11
Cybersecurity Safety	IEC 62443-4-2 Security Level 2, JC-STAR Level 1 IEC 62368-1, UL 62368-1, EN 62368-1		UL 60950-1		
MTBF					
Time	NPort 6610-8-2AC-G2 models: 29,612 hrs NPort 6610-16-2AC-G2 models: 29,515 hrs NPort 6610-32-2AC-G2 models: 29,429 hrs	NPort 6650-8-2AC-G2 models: 29,514 hrs NPort 6610-16-2AC-G2 models: 29,321 hrs NPort 6610-32-2AC-G2 models: 29,045 hrs	CN2610-8-2AC models: 773,268 hrs CN2610-16-2AC models: 604,346 hrs	CN2650-8 models: 657,123 hrs CN2650-16 models: 457,175 hrs	CN2650-8-2AC models: 773,268 hrs CN2650-16-2AC models: 442,699 hrs
Standards	Telcordia Standard SR332, Telcordia Issue 4				

Secure Terminal Servers



Product Series	NPort 6650I-8/-16-G2	NPort 6650I-8/-16-2AC-G2	CN2650I-8/-16	CN2650I-8/-16-2AC	CN2650I-8/-16-HV-T
Ethernet Interface					
10/100BaseT(X) Ports (RJ45 Connector)	-		2		
10/100/1000BaseT(X) Ports (RJ45 Connector)	2		-		
Compatible Modules	NM expansion modules TX/FX/SFP extension		-		
Ethernet Software Features					
Configuration Options	Web Console (HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console		Serial Console, Telnet Console, Windows Utility, Device Search Utility (DSU), Web Console (HTTP/HTTPS)		
Management	ARP, DHCP Client, DNS, HTTPS, ICMP, IPv4/IPv6, SMTP/SMTSPS, SNMPv1/v2c/v3, SNTP, TCP/IP, UDP, WINS		ARP, BOOTP, DDNS, DHCP Client, DNS, HTTP, IPv4, SMTP, SNMPv1/v2c/v3, TCP/IP, Telnet, UDP, ICMP, SLIP		
Windows Real COM Drivers	Windows 11/10/8.1/8/7 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2		Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded		
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x		Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x		
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x		macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X		
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)				
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11				
Android API	-		Android 3.1.x and later		
Unicast Routing	RIPv1/V2, Static Route				
Security Functions					
Root of Trust	Secure Boot, True Random Number Generator (TRNG), Security Screws		-		
Authentication	Local database, RADIUS, TACACS+		Local database (password only), RADIUS		
Encryption	HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, CHACHA20, SHA-256, SHA-384, HMAC SSH: ECC-256, ECC-384, ECC-521, RSA-2048, AES-128, AES-256, SHA-256, SHA-384, HMAC SNMPv3: AES-128, SHA-256, SHA-384 Secure OP mode: HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, CHACHA20, SHA-256, SHA-384, HMAC Config Import/Export: AES-256, SHA-256, HMAC		HTTPS, AES-128, AES-256, HMAC, RSA-1024, SHA-1		
Security Protocols	HTTPS (TLS v1.2/v1.3), SNMPv3, SSHv2		SNMPv3, SSHv2		
Serial Interface					
Connector	8-pin RJ45		DB9 male		
No. of Ports	8/16		8/16		
Serial Standards	RS-232, RS-422, RS-485		RS-232, RS-422, RS-485		
Secure Operation Modes	Reverse SSH, Secure Pair Connection, Secure Real COM, Secure TCP Client, Secure TCP Server, SSH, Secure Redundant COM (with NM modules installed)		-		
Standard Operation Modes	Disabled, Pair Connection, PPP, Real COM, Reverse Terminal, RFC2217, TCP Client, TCP Server, Terminal, UDP, Redundant COM (with NM modules installed)		Real COM mode, TCP Server mode, TCP Client mode, UDP mode, RFC2217 mode, Terminal mode, Reverse Telnet mode, PPP mode, DRDAS mode, Redundant COM mode, Disabled		
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)		50 bps to 921.6 kbps		
Flow Control	None, RTS/CTS, DTR/DSR, RTS Toggle, XON/XOFF		None, RTS/CTS, DTR/DSR, XON/XOFF		
Power Parameters					
No. of Power Inputs	1		2		1
Input Current	330 mA (max.)		130 mA @ 110 VAC		200 mA @ 88 VDC
Input Voltage	100 to 240 VAC (50/60 Hz)		100 to 240 VAC (50/60 Hz)		
Physical Characteristics					
Dimensions (Without Ears)	440 x 200 x 43.65 mm (17.32 x 7.87 x 1.72 in)		440 x 198 x 45.5 mm (17.32 x 7.80 x 1.77 in)		
Installation	Desktop, Rack mounting (mounting kit included)				
Environmental Limits					
Operating Temperature	-10 to 60 °C (14 to 140 °F)		0 to 55 °C (32 to 131 °F)		
Storage Temperature (Package Included)	-40 to 75 °C (-40 to 167 °F)		0 to 55 °C (32 to 131 °F)		
Standards and Certifications					
EMC	EN 55032/35				
EMI	CISPR 32, FCC Part 15B Class A				
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11		IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2.5 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF IEC 61000-4-11		IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2.5 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF IEC 61000-4-11
Cybersecurity Safety	IEC 62443-4-2 Security Level 2, JC-STAR Level 1 IEC 62368-1, UL 62368-1, EN 62368-1		UL 60950-1		
MTBF					
Time	NPort 6650I-8-G2 models: 29,446 hrs NPort 6650I-16-G2 models: 29,185 hrs	NPort 6650I-8-2AC-G2 models: 29,445 hrs NPort 6650I-16-2AC-G2 models: 29,184 hrs	CN2650I-8 models: 374,652 hrs CN2650I-16 models: 248,837 hrs	CN2650I-8-2AC models: 370,752 hrs CN2650I-16-2AC models: 247,119 hrs	CN2650I-8-HV-T models: 357,995 hrs CN2650I-16-HV-T models: 241,404 hrs
Standards	Telcordia Standard SR332, Telcordia Issue 4				

Combo Switch/Serial Device Servers



Product Series	NPort S8455I	NPort S8455I-MM-SC	NPort S8455I-SS-SC
Input/Output Interface			
Alarm Contact Channels	2, Resistive load: 1 A @ 24 VDC		
Digital Input Channels	2		
Digital Inputs	+13 to +30 V for state 1, -30 to +1 V for state 0, Max. input current: 8 mA		
Ethernet Interface			
10/100BaseT(X) Ports (RJ45 Connector)	5	3	3
100BaseFX Ports (Multi-mode, SC Connector)	-	2	-
100BaseFX Ports (Single-mode, SC Connector)	-	-	2
Ethernet Software Features			
Configuration Options	Web console (HTTP/HTTPS), Windows Utility, Serial console, Telnet console		
Management	BOOTP, Device Search Utility, DHCP Client, DHCP Option 82, HTTP, IPv4, LLDP, Port Mirror, RMON, SMTP, SNMPv1/v2c/v3, Syslog, TCP/IP, Telnet, Web Console		
Filter	802.1Q, GVRP, IGMP v1/v2		
Windows Real COM Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95, Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded		
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x		
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x, SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X		
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)		
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11		
Android API	Android 3.1.x and later		
Time Management	SNTP		
MIB	Bridge MIB, Device Settings MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RFC1213, RFC1317, RMON MIB Groups 1, 2, 3, 9, RSTP MIB		
Redundancy Protocols	RSTP, Turbo Chain, Turbo Ring v1, Turbo Ring v2		
Security	HTTPS, SSL, SSH		
Authentication	Local database, RADIUS		
Serial Interface			
Connector	DB9 male		
No. of Ports	4		
Serial Standards	RS-232, RS-422, RS-485		
Operation Modes	Disabled, Real COM mode, RFC2217 mode, TCP Client mode, TCP Server mode, UDP mode		
Baudrate	50 bps to 921.6 kbps		
Flow Control	None, RTS/CTS, XON/XOFF		
Isolation	2 kV		
Console Port	RS-232 (Tx, Rx, GND), 8-pin RJ45 (19200, n, 8, 1)		
Power Parameters			
No. of Power Inputs	2		
Power Connector	2 removable 6-contact terminal blocks		
Input Current	935 mA @ 12 VDC		
Input Voltage	12 to 48 VDC		
Physical Characteristics			
Dimensions	73.1 x 134 x 125 mm (2.88 x 5.27 x 4.92 in)		
Installation	DIN-rail mounting, Wall mounting (with optional kit)		
Environmental Limits			
Operating Temperature	0 to 60°C (32 to 140°F)		
Storage Temperature	-40 to 75°C (-40 to 167°F)		
Standards and Certifications			
EMC	EN 55032/35		
EMI	CISPR 32, FCC Part 15B Class A		
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 1 kV; Signal: 0.25 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF		
Environmental Testing	IEC 60068-2-1, IEC 60068-2-3		
Hazardous Locations	CID2		
Safety	EN 60950-1, IEC 60950-1, UL 508, UL 60950-1		
MTBF			
Time	287,354 hrs	200,951 hrs	286,993 hrs
Standards	Telcordia (Bellcore) Standard TR/SR		

Substation-level Device Servers



Product Series	NPort S9450I-WV-T	NPort S9450I-2M-SC-WV-T	NPort S9450I-2M-ST-WV-T	NPort S9450I-2S-SC-WV-T	NPort S9450I-2S-ST-WV-T
Ethernet Interface					
10/100BaseT(X) Ports (RJ45 Connector)	5	3	3	3	3
100BaseFX Ports (Multi-mode SC Connector)	-	2	-	-	-
100BaseFX Ports (Multi-mode ST Connector)	-	-	2	-	-
100BaseFX Ports (Single-mode SC Connector)	-	-	-	2	-
100BaseFX Ports (Single-mode ST Connector)	-	-	-	-	2
Ethernet Software Features					
Configuration Options	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Command Line Interface (CLI) through Serial/Telnet/SSH				
Windows Real COM Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded				
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x				
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X				
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)				
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11				
Android API	Android 3.1.x and later				
Industrial Protocols	Modbus TCP Server (Slave), DNP3 TCP Outstation				
Time Management	NTP Server/Client, SNTP				
MIB	Bridge MIB, Device Settings MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RFC1213, RFC1317, RMON MIB Groups 1, 2, 3, 9, RSTP MIB				
Redundancy Protocols	RSTP, Turbo Chain, Turbo Ring v1, Turbo Ring v2				
Security	HTTPS/SSL, Local Account Accessibility, TACACS+, RADIUS, SSH				
Serial Interface					
Connector	DB9 male				
No. of Ports	4				
Serial Standards	RS-232, RS-422, RS-485				
Operation Modes	Real COM mode, RFC2217 mode, TCP Client mode, TCP Server mode, UDP mode, Modbus mode, DNP3 mode, DNP3 Raw Socket mode, Disabled				
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)				
Flow Control	None, RTS/CTS, XON/XOFF				
Isolation	2 kV				
Surge	4 kV				
Console Port	RS-232 (Tx, Rx, GND), 10-pin RJ50 (19200, n, 8, 1)				
Power Parameters					
No. of Power Inputs	2				
Input Current	520 mA @ 24 VDC				
Input Voltage	24/48 VDC (18 to 72 VDC)				
Physical Characteristics					
Dimensions	80 x 160 x 109 mm (3.15 x 6.30 x 4.29 in)				
Installation	DIN-rail mounting, Wall mounting (with optional kit)				
Environmental Limits					
Operating Temperature	-40 to 85°C (-40 to 185°F)				
Standards and Certifications					
EMC	EN 61000-6-2/-6-4				
EMI	CISPR 32, FCC Part 15B Class A				
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 6 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF IEC 61000-4-11				
Power Substation	IEC 61850-3, IEEE 1613				
Hazardous Locations	CID2				
Safety	EN 61010-2-201, UL 61010-2-201				
MTBF					
Time	347,436 hrs				
Standards	Telcordia SR332				

Substation-level Device Servers



Product Series	NPort S9650I-8-2HV-E-T	NPort S9650I-8-2HV-MS-C-T	NPort S9650I-8-2HV-SS-C-T	NPort S9650I-8B-2HV-IRIG-T	NPort S9650I-8F-2HV-E-T	NPort S9650I-8F-2HV-MS-C-T	NPort S9650I-8F-2HV-SS-C-T
Ethernet Interface							
10/100BaseT(X) Ports (RJ45 Connector)	4	2	2	2	4	2	2
100BaseFX Ports (Multi-mode SC Connector)	-	2	-	-	-	2	-
100BaseFX Ports (Single-mode SC Connector)	-	-	2	-	-	-	2
Ethernet Software Features							
Configuration Options	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Command Line Interface (CLI) through Serial/Telnet/SSH						
Windows Real COM Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95, Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded						
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x						
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x, SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X						
Arm@-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11						
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)						
Android API	Android 3.1.x and later						
Industrial Protocols	Modbus TCP Server (Slave), DNP3 TCP Outstation						
Time Management	NTP Server/Client, SNTP, IEEE 1588v2 PTP (hardware-based), IRIG-B						
MIB	Bridge MIB, Device Settings MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RFC1213, RFC1317, RMON MIB Groups 1, 2, 3, 9, RSTP MIB						
Redundancy Protocols	RSTP, Turbo Chain, Turbo Ring v1, Turbo Ring v2						
Security	HTTPS/SSL, Local Account Accessibility, TACACS+, RADIUS, SSH						
IRIG-B Interface							
PWM/PPS Output, BNC Connector	-	-	-	1	-	-	-
PWM Input, BNC Connector	-	-	-	1	-	-	-
PWM/PPS Output, DB9 Female	-	-	-	8	-	-	-
Serial Interface							
Connector	DB9 male		DB9 female		Multi-mode ST		
No. of Ports	8						
Serial Standards	RS-232, RS-422, RS-485						
Operation Modes	Real COM mode, RFC2217 mode, TCP Client mode, TCP Server mode, UDP mode, Modbus mode, DNP3 mode, DNP3 Raw Socket mode, Disabled						
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)						
Flow Control	None, RTS/CTS, XON/XOFF						
Isolation	2 kV						
Surge	4 kV						
Console Port	RS-232 (TxD, RxD, GND), 10-pin RJ50 (19200, n, 8, 1)						
Power Parameters							
No. of Power Inputs	2						
Input Current	0.65 A @ 100 VAC, 0.47 A @ 100 VDC						
Input Voltage	110/220 VAC/VDC (100 to 240 VAC, 100 to 250 VDC)						
Physical Characteristics							
Dimensions	457 x 32 x 330 mm (18 x 1.25 x 12.99 in)						
Environmental Limits							
Operating Temperature	-40 to 85°C (-40 to 185°F)						
Standards and Certifications							
EMC	EN 61000-6-2/-6-4						
EMI	CISPR 32, FCC Part 15B Class A						
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF IEC 61000-4-11						
Power Substation Safety	IEC 61850-3, IEEE 1613						
	EN 61010-2-201, UL 61010-2-201						
MTBF							
Time	224,670 hrs	220,944 hrs	213,025 hrs	311,734 hrs	304,587 hrs		
Standards	Telcordia SR332						

Railway Device Servers



Product Series	NPort 5150AI-M12	NPort 5250AI-M12	NPort 5450AI-M12
Ethernet Interface			
10/100BaseT(X) Ports (M12 D-coded 4-pin Female Connector)	1		
Ethernet Software Features			
Configuration Options	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console, Telnet Console		
Management	ARP, BOOTP, DHCP Client, DNS, HTTP, HTTPS, ICMP, IPv4, LLDP, SMTP, SNMPv1/v2c, TCP/IP, Telnet, UDP		
Filter	IGMP v1/v2		
Windows Real COM Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded		
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x		
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X		
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)		
Arm@-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11		
Android API	Android 3.1.x and later		
Security Functions			
Authentication	Local database		
Encryption	HTTPS, AES-128, RSA-1024, SHA-1, SHA-256		
Security Protocols	SNMPv3, HTTPS (TLS 1.2)		
Serial Interface			
Connector	DB9 male		
No. of Ports	1	2	4
Serial Standards	RS-232, RS-422, RS-485		
Baudrate	Supports standard baudrates (unit=bps): 50, 75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 230.4k, 460.8k, 921.6k		
Flow Control	None, RTS/CTS (RS-232 only), DTR/DSR (RS-232 only), XON/XOFF		
RS-485 Data Direction Control	ADDC (automatic data direction control)		
Isolation	2 kV		
Power Parameters			
Input Current	310 mA @ 12 VDC	360 mA @ 12 VDC	440 mA @ 12 VDC
Input Voltage	12 to 48 VDC (compliant with EN 50155 for 24/48 VDC)		
Power Connector	M12 A-coded 5-pin male connector		
Physical Characteristics			
Dimensions	80 x 216.6 x 52.9 mm (3.15 x 8.53 x 2.08 in)		
Weight	686 g (1.51 lb)		
Environmental Limits			
Operating Temperature	-25 to 55°C (-13 to 131°F)		
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)		
Ambient Relative Humidity	5 to 95% (non-condensing)		
Standards and Certifications			
EMC	EN 55032/35		
EMI	CISPR 32, FCC Part 15B Class A		
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 0.5 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF IEC 61000-4-11		
Railway	EN 50121-4		
MTBF			
Time	789,341 hrs	639,622 hrs	467,777 hrs
Standards	Telcordia (Bellcore) Standard TR/SR		

General-purpose Device Servers



Product Series	NPort 5110	NPort 5130	NPort 5150	NPort 5110A	NPort 5130A	NPort 5150A	NPort P5150A
Ethernet Interface							
10/100BaseT(X) Ports (RJ45 Connector)	1						
Magnetic Isolation Protection	1.5 kV (built-in)						
Standards	-						PoE (IEEE 802.3af)
Ethernet Software Features							
Configuration Options	Web Console (HTTP), Windows Utility, Device Search Utility, Telnet Console, MCC Tool	Web Console (HTTP), Windows Utility, Device Search Utility, Telnet Console, MCC Tool	Web Console (HTTP), Windows Utility, Device Search Utility, Telnet Console, MCC Tool	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, Telnet Console, MCC Tool	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, Telnet Console, MCC Tool	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, Telnet Console, MCC Tool	
Management	DHCP Client, IPv4, SMTP, SNMPv1, Telnet, DNS, HTTP, ARP, BOOTP, UDP, TCP/IP, ICMP			ARP, BOOTP, DHCP Client, DNS, HTTP, HTTPS, ICMP, IPv4, LLDP, SMTP, SNMPv1/v2c, TCP/IP, Telnet, UDP			
Windows Real COM Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95, Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded						
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x						
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x, SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X						
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11						
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)						
Android API	Android 3.1.x and later						
Security Functions							
Authentication	Local database (password only)			Local database			
Encryption	-			HTTPS, AES-128, SHA-1, RSA-1024, SHA-256			
Security Protocols	-			HTTPS (TLS 1.2)			
Serial Interface							
Connector	DB9 male						
No. of Ports	1						
Serial Standards	RS-232	RS-422, RS-485	RS-232, RS-422, RS-485	RS-232	RS-422, RS-485	RS-232, RS-422, RS-485	
Operation Modes	Disabled, Ethernet Modem, Pair Connection, Real COM, Reverse Telnet, TCP Client, TCP Server, UDP			Disabled, Ethernet Modem, Pair Connection, Real COM, Reverse Telnet, RFC2217, TCP Client, TCP Server, UDP			
Baudrate	110 bps to 230.4 kbps	50 bps to 921.6 kbps	50 bps to 921.6 kbps	Supports standard baudrates (unit=bps): 50, 75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 230.4k, 460.8k, 921.6k			
Flow Control	RTS/CTS (RS-232 only), DTR/DSR (RS-232 only), XON/XOFF						
Pull High/Low Resistor for RS-485	-	1 kilo-ohm, 150 kilo-ohms		-	1 kilo-ohm, 150 kilo-ohms		
Power Parameters							
Input Current	128.7 mA @ 12 VDC	200 mA @ 12 VDC	200 mA @ 12 VDC	82.5 mA @ 12 VDC	89.1 mA @ 12 VDC	92.4 mA @ 12 VDC	DC Jack I/P: 125 mA @ 12 VDC PoE I/P: 180 mA @ 48 VDC
Input Voltage	12 to 48 VDC						12 to 48 VDC (supplied by power adapter) 48 VDC (supplied by PoE)
No. of Power Inputs	1						
Source of Input Power	Power input jack						Power input jack, PoE
Physical Characteristics							
Dimensions (With Ears)	75.2 x 80 x 22 mm (2.96 x 3.15 x 0.87 in)						100 x 111 x 26 mm (3.94 x 4.37 x 1.02 in)
Environmental Limits							
Operating Temperature	Standard models: 0 to 55°C (32 to 131°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	0 to 55°C (32 to 131°F)		Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)			
Storage Temperature (Package Included)	-40 to 75°C (-40 to 167°F)						
Standards and Certifications							
EMC	EN 55032/35						
EMI	CISPR 32, FCC Part 15B Class A						
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11		IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF IEC 61000-4-11		IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m, IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV, IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV, IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m, IEC 61000-4-8 PFMF, IEC 61000-4-11		
Safety	EN 62368-1, IEC 62368-1, UL 60950-1						
MTBF							
Time	3,126,448 hrs	2,836,863 hrs	2,736,202 hrs	2,231,530 hrs			
Standards	Telcordia (Bellcore) Standard TR/SR						

General-purpose Device Servers



Product Series	NPort 5210	NPort 5230	NPort 5232	NPort 5232I	NPort 5210A	NPort 5230A	NPort 5250A
Ethernet Interface							
10/100BaseT(X) Ports (RJ45 Connector)	1						
Magnetic Isolation Protection	1.5 kV (built-in)						
Ethernet Software Features							
Configuration Options	Windows Utility, Serial Console, Telnet Console, Web Console (HTTP), Device Search Utility, MCC Tool		Windows Utility, Telnet Console, Web Console (HTTP), Device Search Utility, MCC Tool		Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, Serial Console, MCC Tool	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, Serial Console, MCC Tool
Management	DHCP Client, IPv4, SNTP, SMTP, SNMPv1, DNS, HTTP, ARP, BOOTP, UDP, TCP/IP, Telnet, ICMP				ARP, BOOTP, DHCP Client, DNS, HTTP, HTTPS, ICMP, IPv4, LLDP, SMTP, SNMPv1/v2c, Telnet, TCP/IP, UDP		
Windows Real COM Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95, Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded						
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x						
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x, SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X						
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11						
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)						
Android API	Android 3.1.x and later						
Filter	-						IGMP v1/v2
Serial Interface							
Connector	8-pin RJ45	Terminal block			DB9 male	5-pin terminal block	DB9 male
No. of Ports	2						
Serial Standards	RS-232	RS-232, RS-422, RS-485 ¹	RS-422, RS-485		RS-232	RS-422, RS-485	RS-232, RS-422, RS-485
Operation Modes	Disabled, Ethernet Modem, Pair Connection, Real COM, Reverse Telnet, TCP Client, TCP Server, UDP				Disabled, Ethernet Modem, Pair Connection, Real COM, Reverse Telnet, RFC2217, TCP Client, TCP Server, UDP		
Baudrate	110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 230.4k bps			50, 75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 230.4k, 460.8k, 921.6k bps			
Flow Control	RTS/CTS (RS-232 only), DTR/DSR (RS-232 only), XON/XOFF						
Pull High/Low Resistor for RS-485	-	1 kilo-ohm (fixed value)			1 kilo-ohm, 150 kilo-ohms		
Isolation	-			2 kV		-	
Terminator for RS-485	-			120 ohms			
Power Parameters							
Input Current	325 mA @ 12 VDC		280 mA @ 12 VDC	365 mA @ 12 VDC		119 mA @ 12 VDC	
Input Voltage	12 to 48 VDC						
No. of Power Inputs	1				2		
Power Connector	1 removable 3-contact terminal block				1 removable 3-contact terminal block, 1 power input jack		
Physical Characteristics							
Dimensions (With Ears)	90 x 100.4 x 22 mm (3.54 x 3.95 x 0.87 in)			90 x 100.4 x 35 mm (3.54 x 3.95 x 1.37 in)		100 x 111 x 26 mm (3.94 x 4.37 x 1.02 in)	
Environmental Limits							
Operating Temperature	Standard models: 0 to 55°C (32 to 131°F) Wide temp. models: -40 to 75°C (-40 to 167°F)						
Storage Temperature (Package Included)	-40 to 75°C (-40 to 167°F)						
Standards and Certifications							
EMC	EN 55032/35						
EMI	CISPR 32, FCC Part 15B Class A						
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m, IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV, IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV, IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m, IEC 61000-4-8 PFMF, IEC 61000-4-11		IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m, IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV, IEC 61000-4-5 Surge: Power: 2 kV; Signal: 0.5 kV, IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m, IEC 61000-4-8 PFMF, IEC 61000-4-11		IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV, IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m, IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV, IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV, IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m, IEC 61000-4-8 PFMF, IEC 61000-4-11		
Safety	EN 62368-1, IEC 62368-1, UL 60950-1						
Maritime	-			DNV		-	
MTBF							
Time	381,342 hrs	377,937 hrs	309,383 hrs	309,383 hrs	847,750 hrs	847,750 hrs	847,750 hrs
Standards	Telcordia (Bellcore) Standard TR/SR						

¹ The NPort 5230 supports RS-232 on one port and RS-422/485 on the other.

General-purpose Device Servers



Product Series	NPort 5410	NPort 5430	NPort 5430I	NPort 5450	NPort 5450I
Ethernet Interface					
10/100BaseT(X) Ports (RJ45 Connector)	1				
Magnetic Isolation Protection	1.5 kV (built-in)				
Ethernet Software Features					
Configuration Options	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Telnet Console				
Management	ARP, BOOTP, DHCP Client, DNS, HTTP, HTTPS, ICMP, IPv4, LLDP, Rtelnet, SMTP, SNMPv1/v2c, TCP/IP, Telnet, UDP				
Filter	IGMP v1/v2				
Windows Real COM Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded				
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x				
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X				
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11				
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)				
Android API	Android 3.1.x and later				
Security Functions					
Authentication	Local database				
Encryption	HTTPS, AES-128, RSA-1024, SHA-1, SHA-256				
Security Protocols	HTTPS (TLS 1.2), SNMPv3				
Serial Interface					
Connector	DB9 male	Terminal block		DB9 male	
No. of Ports	4				
Serial Standards	RS-232	RS-422, RS-485		RS-232, RS-422, RS-485	
Operation Modes	Real COM, TCP Server, TCP Client, UDP, Ethernet Modem, Pair Connection, Reverse Telnet, Disabled				
Baudrate	Supports standard baudrates (unit=bps): 50, 75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 230.4k, 460.8k, 921.6k				
Flow Control	RTS/CTS (RS-232 only), DTR/DSR (RS-232 only), XON/XOFF				
Isolation	-	2 kV		-	2 kV
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms				
Terminator for RS-485	-	120 ohms			
Power Parameters					
Input Current	365 mA @ 12 VDC	320 mA @ 12 VDC	430 mA @ 12 VDC	365 mA @ 12 VDC	550 mA @ 12 VDC
No. of Power Inputs	2				
Power Connector	1 removable 3-contact terminal block Power input jack				
Input Voltage	12 to 48 VDC, 24 VDC for DNV				
Physical Characteristics					
Dimensions (With Ears)	181 x 103 x 33 mm (7.14 x 4.06 x 1.30 in)				
Dimensions (Without Ears)	158 x 103 x 33 mm (6.22 x 4.06 x 1.30 in)				
Environmental Limits					
Operating Temperature	0 to 55°C (32 to 131°F)		Standard models: 0 to 55°C (32 to 131°F) Wide temp. models: -40 to 75°C (-40 to 167°F)		
Storage Temperature (Package Included)	-40 to 75°C (-40 to 167°F)				
Standards and Certifications					
EMC	EN 55032/35				
EMI	CISPR 32, FCC Part 15B Class A				
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11				
Safety	IEC 62368-1, UL 62368-1				
Maritime	DNV				
Medical	EN 60601-1-2 Class B, EN 55011	-	EN 60601-1-2 Class B, EN 55011		
MTBF					
Time	880,274 hrs	826,688 hrs	718,600 hrs	773,682 hrs	678,381 hrs
Standards	Telcordia (Bellcore) Standard TR/SR				

General-purpose Device Servers



Product Series	NPort 5610-8	NPort 5610-8-48V	NPort 5610-16	NPort 5610-16-48V	NPort 5630-8	NPort 5630-16
Ethernet Interface						
10/100BaseT(X) Ports (RJ45 Connector)	1					
Magnetic Isolation Protection	1.5 kV (built-in)					
Ethernet Software Features						
Configuration Options	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console, Telnet Console				Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Telnet Console	
Management	ARP, BOOTP, DHCP Client, DNS, HTTP, HTTPS, ICMP, IPv4, LLDP, RFC2217, Rtelnet, PPP, SLIP, SMTP, SNMPv1/v2c, TCP/IP, Telnet, UDP					
Filter	IGMP v1/v2c					
Windows Real COM Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded					
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x					
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x, SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X					
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11					
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)					
Android API	Android 3.1.x and later					
Security Functions						
Authentication	Local database					
Encryption	HTTPS, AES-128, RSA-1024, SHA-1, SHA-256					
Security Protocols	HTTPS (TLS 1.2), SNMPv3					
Serial Interface						
Connector	8-pin RJ45					
No. of Ports	8	16		8	16	
Serial Standards	RS-232			RS-422, RS-485		
Operation Modes	Disabled, Ethernet Modem, Pair Connection, Real COM, Reverse Telnet, RFC2217, TCP Client, TCP Server, UDP					
Baudrate	Supports standard baudrates (unit=bps): 50, 75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 230.4k, 460.8k, 921.6k					
Flow Control	None, RTS/CTS (RS-232 only), DTR/DSR (RS-232 only), XON/XOFF					
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms					
Terminator for RS-485	-					
Power Parameters						
Input Current	141 mA @ 100 VAC	135 mA @ 48 VDC	141 mA @ 100 VAC	135 mA @ 48 VDC	152 mA @ 100 VAC	
Input Voltage	100 to 240 VAC, 47 to 63 Hz	±48 VDC, 20 to 72 VDC, -20 to -72 VDC	100 to 240 VAC, 47 to 63 Hz	±48 VDC, 20 to 72 VDC, -20 to -72 VDC	100 to 240 VAC, 47 to 63 Hz	
Physical Characteristics						
Dimensions (With Ears)	480 x 45 x 198 mm (18.90 x 1.77 x 7.80 in)					
Dimensions (Without Ears)	440 x 45 x 198 mm (17.32 x 1.77 x 7.80 in)					
Interactive Interface	LCD panel display, Push buttons for configuration					
Environmental Limits						
Operating Temperature	0 to 60°C (32 to 140°F)					
Storage Temperature (Package Included)	-20 to 70°C (-4 to 158°F)					
Standards and Certifications						
EMC	EN 55032/35					
EMI	CISPR 32, FCC Part 15B Class A					
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2.5 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11					
Safety	EN 62368-1, IEC 62368-1, UL 60950-1					
MTBF						
Time	903,009 hrs	892,692 hrs	680,154 hrs	693,529 hrs	844,009 hrs	618,263 hrs
Standards	MIL-HDBK-217F					

General-purpose Device Servers



Product Series	NPort 5650-8	NPort 5650-16	NPort 5650-8-M-SC	NPort 5650-8-S-SC	NPort 5650-16-M-SC	NPort 5650-16-S-SC	NPort 5650-8-HV-T	NPort 5650-16-HV-T	
Ethernet Interface									
10/100BaseT(X) Ports (RJ45 Connector)	1	1	-	-	-	-	1	1	
100BaseFX Ports (Multi-mode SC Connector)	-	-	1	-	1	-	-	-	
100BaseFX Ports (Single-mode SC Connector)	-	-	-	1	-	1	-	-	
Magnetic Isolation Protection	1.5 kV (built-in)								
Ethernet Software Features									
Configuration Options	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console, Telnet Console								
Management	ARP, BOOTP, DHCP Client, DNS, HTTP, HTTPS, ICMP, IPv4, LLDP, RFC2217, Rtelnet, PPP, SLIP, SMTP, SNMPv1/v2c, TCP/IP, Telnet, UDP								
Filter	IGMP v1/v2c								
Windows Real COM Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded								
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x								
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x, SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X								
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11								
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)								
Android API	Android 3.1.x and later								
Security Functions									
Authentication	Local database								
Encryption	HTTPS, AES-128, RSA-1024, SHA-1, SHA-256								
Security Protocols	HTTPS (TLS 1.2), SNMPv3								
Serial Interface									
Connector	8-pin RJ45								
No. of Ports	8	16	8	16	8	16	8	16	
Serial Standards	RS-232, RS-422, RS-485								
Operation Modes	Disabled, Ethernet Modem, Pair Connection, Real COM, Reverse Telnet, RFC2217, TCP Client, TCP Server, UDP								
Baudrate	Supports standard baudrates (unit=bps): 50, 75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 230.4k, 460.8k, 921.6k								
Flow Control	None, RTS/CTS (RS-232 only), DTR/DSR (RS-232 only), XON/XOFF								
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms								
Terminator for RS-485	120 ohms								
Power Parameters									
Input Current	158 mA @ 100 VAC	174 mA @ 100 VAC	164 mA @ 100 VAC	174 mA @ 100 VAC	164 mA @ 100 VAC	152 mA @ 88 VDC	152 mA @ 88 VDC	152 mA @ 88 VDC	
Input Voltage	100 to 240 VAC, 47 to 63 Hz								
Physical Characteristics									
Dimensions (With Ears)	480 x 45 x 198 mm (18.90 x 1.77 x 7.80 in)								
Dimensions (Without Ears)	440 x 45 x 198 mm (17.32 x 1.77 x 7.80 in)								
Interactive Interface	LCD panel display, Push buttons for configuration								
Environmental Limits									
Operating Temperature	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)		0 to 60°C (32 to 140°F)				-40 to 85°C (-40 to 185°F)		
Storage Temperature (Package Included)	Standard models: -20 to 70°C (-4 to 158°F) Wide temp. models: -40 to 75°C (-40 to 167°F)		-20 to 70°C (-4 to 158°F)				-40 to 85°C (-40 to 185°F)		
Standards and Certifications									
EMC	EN 55032/35								
EMI	CISPR 32, FCC Part 15B Class A								
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2.5 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11				IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11				
Safety	EN 62368-1, IEC 62368-1, IEC 60950-1, UL 60950-1								
MTBF									
Time	754,927 hrs	525,107 hrs	738,291 hrs	517,019 hrs	716,168 hrs	506,093 hrs	716,168 hrs	506,093 hrs	
Standards	MIL-HDBK-217F				Telcordia (Bellcore) Standard TR/SR				

General-purpose Device Servers



Product Series	NPort 5610-8-DT-G2	NPort 5650-8-DT-G2	NPort 5650I-8-DT-G2	NPort 5610-8-DT	NPort 5650-8-DT	NPort 5650I-8-DT
Ethernet Interface						
10/100BaseT(X) Ports (RJ45 Connector)	-	-	-	2	2	2
10/100/1000BaseT(X) Ports (RJ45 Connector)	2	2	2	-	-	-
Ethernet Software Features						
Configuration Options	Web Console (HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console			Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console, Telnet Console		
Management	ARP, DHCP Client, DNS, HTTPS, ICMP, IPv4, SMTP/SMTTP, SNMPv1/v2c/v3, SNMP, TCP/IP, UDP, WINS			ARP, BOOTP, DHCP Client, DNS, HTTP, HTTPS, ICMP, IPv4, LLDP, Rtelnet, SMTP, SNMPv1/v2c, TCP/IP, Telnet, UDP		
Filter	IGMP v1/v2					
Windows Real COM Drivers	Windows 11/10/8.1/8/7 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2			Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded		
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x			Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x		
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x			macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, SCO UnixWare 7, Sun Solaris 10, QNX 4.25, QNX 6.x, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X		
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11					
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)					
Android API	-			Android 3.1.x and later		
Security Functions						
Authentication	Local database (RBAC supported)			Local database		
Encryption	HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, SHA-256, SHA-384, HMAC SSH: ECC-256, ECC-384, ECC-521, RSA-2048, AES-128, AES-256, SHA-256, SHA-384, HMAC SNMPv3: AES-128, SHA-256, SHA-384 Secure OP mode: HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, SHA-256, SHA-384, HMAC Config file import/export: AES-256, SHA-256, HMAC			HTTPS, AES-128, RSA-1024, SHA-1, SHA-256		
Security Protocols	HTTPS (TLS 1.2), SNMPv3					
Serial Interface						
Connector	DB9 male					
No. of Ports	8					
Serial Standards	RS-232	RS-232, RS-422, RS-485		RS-232	RS-232, RS-422, RS-485	
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)			Supports standard baudrates (unit=bps): 50, 75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 230.4k, 460.8k, 921.6k		
Flow Control	None, RTS/CTS (RS-232 only), DTR/DSR (RS-232 only), XON/XOFF					
Pull High/Low Resistor for RS-485	-	1 kilo-ohm, 150 kilo-ohms		-	1 kilo-ohm, 150 kilo-ohms	
Terminator for RS-485	-	120 ohms		-	120 ohms	
Isolation	-	2 kV		-	2 kV	
Surge	0.5 kV					
Console Port	RS-232 (TxD, RxD, GND), 8-pin RJ45 (19200, n, 8, 1)					
Power Parameters						
Input Current	800 mA @ 12 VDC (max.)			611 mA @ 12 VDC	615 mA @ 12 VDC	1066 mA @ 12 VDC
No. of Power Inputs	1			2		
Input Voltage	12 to 48 VDC					
Reverse Polarity Protection	Supported					
Source of Input Power	Terminal block			Terminal block, Power input jack		
Physical Characteristics						
Dimensions (With Wall-mounting Kit)	229 x 46 x 125 mm (9.01 x 1.81 x 4.92 in)					
Dimensions (Without Ears)	197 x 44 x 125 mm (7.76 x 1.73 x 4.92 in)					
Interactive Interface	LCD panel display, Push buttons for configuration					
Environmental Limits						
Operating Temperature	-10 to 60°C (14 to 140°F)			0 to 55°C (32 to 131°F)		
Storage Temperature (Package Included)	-40 to 75°C (-40 to 167°F)					
Standards and Certifications						
EMC	EN 55032/35					
EMI	CISPR 32, FCC Part 15B Class A					
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11			IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11		
Safety	IEC 62368-1, UL 62368-1, EN 62368-1					
MTBF						
Time	29,666 hrs	29,612 hrs	29,543 hrs	836,374 hrs		
Standards	Telcordia (Bellcore) Standard					

General-purpose Device Servers




Product Series	NPort 5610-16-DT-J-G2	NPort 5650-16-DT-J-G2	NPort 5610-8-DTS-J-G2	NPort 5650-8-DTS-J-G2	NPort 5610-8-DT-J	NPort 5650-8-DT-J
Ethernet Interface						
10/100BaseT(X) Ports (RJ45 Connector)	-	-	-	-	2	2
10/100/1000BaseT(X) Ports (RJ45 Connector)	2	2	2	2	-	-
Ethernet Software Features						
Configuration Options	Web Console (HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console			Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console, Telnet Console		
Management	ARP, DHCP Client, DNS, HTTPS, ICMP, IPv4, SMTP/SMTSP, SNMPv1/v2c/v3, SNTp, TCP/IP, UDP, WINS			ARP, BOOTP, DHCP Client, DNS, HTTP, HTTPS, ICMP, IPv4, LLDP, Rtelnet, SMTP, SNMPv1/v2c, TCP/IP, Telnet, UDP		
Filter	IGMP v1/v2					
Windows Real COM Drivers	Windows 11/10/8.1/8/7 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2			Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded		
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x			Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x		
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x					
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11					
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)					
Android API	Android 3.1.x and later					
Security Functions						
Authentication	Local database (RBAC supported)			Local database		
Encryption	HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, SHA-256, SHA-384, HMAC SSH: ECC-256, ECC-384, ECC-521, RSA-2048, AES-128, AES-256, SHA-256, SHA-384, HMAC SNMPv3: AES-128, SHA-256, SHA-384 Secure OP mode: HTTPS: ECC-256, ECC-384, ECC-521, RSA-1024, RSA-2048, RSA-3072, RSA-4096, AES-128, AES-256, SHA-256, SHA-384, HMAC Config file import/export: AES-256, SHA-256, HMAC			HTTPS, AES-128, RSA-1024, SHA-1, SHA-256		
Security Protocols	HTTPS (TLS 1.2), SNMPv3					
Serial Interface						
Connector	8-pin RJ45		10-pin RJ50		8-pin RJ45	
No. of Ports	16		8		8	
Serial Standards	RS-232	RS-232, RS-422, RS-485	RS-232	RS-232, RS-422, RS-485	RS-232	RS-232, RS-422, RS-485
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)					
Flow Control	None, RTS/CTS (RS-232 only), DTR/DSR (RS-232 only), XON/XOFF					
Pull High/Low Resistor for RS-485	-	1 kilo-ohm, 150 kilo-ohms	-	1 kilo-ohm, 150 kilo-ohms	-	1 kilo-ohm, 150 kilo-ohms
Terminator for RS-485	-	120 ohms	-	120 ohms	-	120 ohms
Surge	0.5 kV					
Console Port	- RS-232 (TxD, RxD, GND), 8-pin RJ45 (19200, n, 8, 1)					
Power Parameters						
Input Current	800 mA @ 12 VDC (max.)			611 mA @ 12 VDC		615 mA @ 12 VDC
No. of Power Inputs	1			2		2
Input Voltage	12 to 48 VDC					
Reverse Polarity Protection	Supported					
Source of Input Power	Terminal block			Terminal block, Power input jack		
Physical Characteristics						
Dimensions (With Wall-mount Kit)	229 x 46 x 125 mm (9.01 x 1.81 x 4.92 in)		240 x 27 x 95 mm (9.45 x 1.06 x 3.74 in)		229 x 46 x 125 mm (9.01 x 1.81 x 4.92 in)	
Dimensions (Without Ears)	197 x 44 x 125 mm (7.76 x 1.73 x 4.92 in)		210 x 25 x 95 mm (8.27 x 0.98 x 3.74 in)		197 x 44 x 125 mm (7.76 x 1.73 x 4.92 in)	
Interactive Interface	- LCD panel display, Push buttons for configuration					
Environmental Limits						
Operating Temperature	-10 to 60°C (14 to 140°F)			0 to 55°C (32 to 131°F)		
Storage Temperature (Package Included)	-40 to 75°C (-40 to 167°F)					
Standards and Certifications						
EMC	EN 55032/35					
EMI	CISPR 32, FCC Part 15B Class A					
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11					
Safety	IEC 62368-1, UL 62368-1, EN 62368-1			UL 60950-1, IEC 62368-1		
MTBF						
Time	2,043,468 hrs	1,638,263 hrs	3,499,034 hrs	2,883,685 hrs	836,374 hrs	
Standards	Telcordia (Bellcore) Standard					

Industrial-grade Device Servers



Product Series	NPort IA5150-G2/5250-G2/5450-G2	NPort IA5150/5250	NPort IA5150A/5250A/5450A
Ethernet Interface			
10/100BaseT(X) Ports (RJ45 Connector)	NPort IA5150-G2/5250-G2/5450-G2 models: 2 NPort IA5150-M-SC/S-SC/SFP-G2 models: 1	NPort IA5150/5250 models: 2	2
100BaseFX Ports (Multi-mode SC Connector)	NPort IA5150-M-SC-G2 models: 1	NPort IA5150-M-SC models: 1	-
100BaseFX Ports (Multi-mode ST Connector)	-	NPort IA5150-M-ST models: 1	-
100BaseFX Ports (Single-mode SC Connector)	NPort IA5150-S-SC-G2 models: 1	NPort IA5150-S-SC models: 1	-
100BaseSFP Ports	NPort IA5150-SFP-G2 models: 1	-	-
Ethernet Software Features			
Configuration Options	Web Console (HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console	Web Console (HTTP), Windows Utility, Device Search Utility, Serial Console, Telnet Console	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool, Serial Console, Telnet Console
Management	ARP, DHCP Client, DNS, HTTPS, ICMP, IPv4, SMTP/SMTSP, SNMPv1/v2c/v3, SNTp, TCP/IP, UDP, WINS	ARP, BOOTP, DHCP Client, DNS, HTTP, ICMP, IPv4, Rtelnet, SMTP, SNMPv1, TCP/IP, Telnet, UDP	ARP, BOOTP, DHCP Client, DNS, HTTP, HTTPS, ICMP, IPv4, LLDP, Rtelnet, SMTP, SNMPv1/v2c, TCP/IP, Telnet, UDP
Windows Real COM Drivers	Windows 11/10/8.1/8/7 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, Sun Solaris 10, QNX 4.25, QNX 6.x, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11		
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)		
Android API	Android 3.1.x and later		
Security Functions			
Authentication	Local database (RBAC supported)		Local database (password only)
Serial Interface			
Connector	NPort IA5150-G2/IA5250-G2/IA5450-G2 models: 1/2/4 x DB9 male NPort IA5250-TB-G2/IA5450-TB-G2 models: 2/4 x terminal blocks	NPort IA5150 models: 1 x DB9 male for RS-232, 1 x terminal block for RS-422/485 NPort IA5250 models: 2 x DB9 male	NPort IA5150A models: 1 x DB9 male for RS-232, 1 x terminal block for RS-422/485 NPort IA5250A/IA5450A models: 2/4 x DB9 male
No. of Ports	NPort IA5150-G2 models: 1 NPort IA5250-G2 models: 2 NPort IA5450-G2 models: 4	NPort IA5150 models: 1 NPort IA5250 models: 2	NPort IA5150A models: 1 NPort IA5250A models: 2 NPort IA5450A models: 4
Serial Standards	RS-232, RS-422, RS-485		
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)	Supports standard baudrates (unit=bps): 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 2304k, 460.8k, 921.6k	
Flow Control	None, RTS/CTS (RS-232 only), DTR/DSR (RS-232 only), XON/XOFF		
Terminator for RS-485	120 ohms (software-configurable)	120 ohms	
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms (software-configurable)	1 kilo-ohm, 150 kilo-ohms	
Isolation	1 models: 2 kV		
Power Parameters			
Input Voltage	12 to 48 VDC		
Input Current	NPort IA5150-G2/IA5250-G2 models: 270 mA @ 12 VDC NPort IA5150I-G2/IA5150-TB-G2/IA5250I-G2/IA5250-TB-G2 models: 330 mA @ 12 VDC NPort IA5450-G2/IA5150-Fiber-G2/IA5150-SFP-G2 models: 377 mA @ 12 VDC	NPort IA-5150/IA-5150-T/IA-5250/IA-5250-T models: 435 mA @ 12 VDC Other models: 555 mA @ 12 VDC	NPort IA5150A models: 225 mA @ 12 VDC NPort IA5250A models: 290 mA @ 12 VDC NPort IA5450A models: 512 mA @ 12 VDC
No. of Power Inputs	2		
Power Connector	Terminal block		
Environmental Limits			
Operating Temperature	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	
Storage Temperature (Package Included)	-40 to 85°C (-40 to 167°F)		
Standards and Certifications			
EMC	EN 55032/35		
EMI	CISPR 32, FCC Part 15B Class A		
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11		
Safety	IEC 62368-1, EN 62368-1, UL 62368-1	IEC 60950-1, EN 60950-1, EN 62368-1, UL 508	UL 508
Maritime	DNV (pending approval)		
Hazardous Locations	ATEX, CID2, IECEx		

Wireless Device Servers

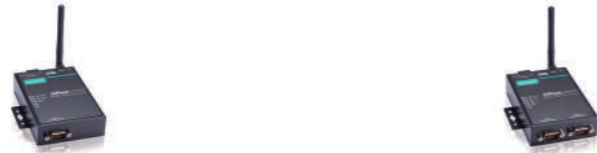

Product Series	NPort W2150A-W4	NPort W2250A-W4
Ethernet Interface		
10/100BaseT(X) Ports (RJ45 Connector)	1	
Ethernet Software Features		
Configuration Options	Web Console (HTTP/HTTPS), Windows Utility, Device Search Utility, MCC Tool	
Management	DHCP Option 82, HTTP, IPv4, SMTP, SNMPv1/v2c/v3, Syslog, Telnet, Web Console	
Windows Real COM Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT, Windows Embedded CE 5.0/6.0, Windows XP Embedded	
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x	
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X	
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11	
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)	
Android API	Android 3.1.x and later	
WLAN Interface		
WLAN Standards	802.11a/b/g/n	
Security Functions		
Authentication	Local database, RADIUS	
Encryption	AES-128, AES-256, HMAC, RSA-1024, SHA-1, SHA-256, SHA-384	
Security Protocols	SNMPv3, SSHv2, HTTPS (TLS 1.3)	
Wireless Security	WEP, WPA/WPA2-Enterprise (IEEE 802.1X/RADIUS support EAP-TLS 1.3), WPA/WPA2-Personal	
Hardware-based Security	Secure Boot	
Serial Interface		
Connector	DB9 male	
No. of Ports	1	2
Serial Standards	RS-232, RS-422, RS-485	
Operation Modes	Real COM mode, TCP Server mode, TCP Client mode, UDP mode, RFC2217 mode, Pair Connection mode, Ethernet Modem mode, Disabled	
Baudrate	300 bps to 921.6 kbps	
Flow Control	None, RTS/CTS, XON/XOFF	
Surge	1 kV	
Power Parameters		
Input Current	429 mA @ 12 VDC	455 mA @ 12 VDC
Input Voltage	12 to 48 VDC	
Physical Characteristics		
Dimensions (With Ears, Without Antenna)	100 x 111 x 26 mm (3.94 x 4.37 x 1.02 in)	
Dimensions (Without Ears or Antenna)	77 x 111 x 26 mm (3.03 x 4.37 x 1.02 in)	
Environmental Limits		
Operating Temperature	Standard models: 0 to 55°C (32 to 131°F), Wide temp. models: -40 to 75°C (-40 to 167°F)	
Storage Temperature (Package Included)	-40 to 75°C (-40 to 167°F)	
Standards and Certifications		
EMC	EN 55032/35	
EMI	CISPR 32, FCC Part 15B Class A	
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11	
Radio Frequency	CE (ETSI EN 301 893, ETSI EN 300 328, ETSI EN 301489-1/-17), MIC, KC, RCM, WPC	
Safety	UL 62368-1, IEC 62368-1	
MTBF		
Time	1,356,464 hrs	1,187,539 hrs
Standards	Telcordia SR332	

Embedded Device Servers



Product Series	MiiNePort E2	MiiNePort E3
Embedded System		
CPU	32-bit Arm® Core	
Memory		
Flash	2 MB	
SDRAM	4 MB	
Input/Output Interface		
Configurable DIO Channels (by Software)	4	
Ethernet Interface		
10/100BaseT(X) Ports, Auto MDI/MDI-X	4-pin pin header	8-pin RJ45
Magnetic Isolation Protection	1.5 kV (built-in)	
PoE Pass-through	–	IEEE 802.3af for PoE
Ethernet Software Features		
Configuration Options	Web Console (HTTP), Windows Utility	
Management	ARP, BOOTP, Device Search Utility (DSU), DHCP Client, IPv4, SMTP, SNMPv1, TCP/IP, Telnet, TFTP, UDP, ICMP	
Windows Real COM Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT Windows Embedded CE 5.0/6.0, Windows XP Embedded	
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x	
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X	
Virtual Machine	VMWare ESXi (Windows 11, 10), VMware Fusion and Parallels Desktop (Windows on macOS 26, 15, 14, 13, 12, 11, 10.1x)	
Arm®-based Platform Support	Windows 11, Linux kernel 6.x, 5.x, 4.x, macOS 26, 15, 14, 13, 12, 11	
Android API	Android 3.1.x and later	
Serial Interface		
No. of Ports	1	
Serial Standards	TTL	
Operation Modes	Real COM mode, RFC2217 mode, TCP Client mode, TCP Server mode, UDP mode, Ethernet Modem mode, MCSC mode	Real COM mode, TCP Server mode, TCP Client mode, UDP mode, RFC2217 mode, Ethernet Modem mode
Baudrate	50 bps to 230.4 kbps	
Flow Control	None, RTS/CTS, DTR/DSR, XON/XOFF	
Serial Signals		
TTL	TxD, RxD, RTS, CTS, DTR, DSR, DCD, RST (reset circuit), GND	
NetEZ Technology		
NetEZ Functions	EZPower, EZPage, SCM (Serial Command Mode), AutoCFG, MCSC (Multi-channel Serial Communication)	EZPower, EZPage, SCM (Serial Command Mode), AutoCFG
Power Parameters		
Input Current	157 mA @ 3.3 VDC	
Input Voltage	3.3 to 5 VDC	
Physical Characteristics		
Dimensions	29 x 17 x 12.6 mm (1.14 x 0.67 x 0.50 in)	35 x 52.5 x 18 mm (1.38 x 2.07 x 0.71 in)
Weight	5 g (0.01 lb)	12 g (0.03 lb)
Form Factor Type	Drop-in modules	
Environmental Limits		
Operating Temperature	0 to 55°C (32 to 131°F)	
Storage Temperature (Package Included)	-40 to 60°C (-40 to 140°F)	
Standards and Certifications		
EMC	EN 55032/35	
EMI	CISPR 32, FCC Part 15B Class B	
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11
Environmental Testing	IEC 60068-2-1, IEC 60068-2-3	
MTBF		
Time	5,696,350 hrs	
Standards	Telcordia SR332	

Serial Converters

Moxa's serial media converters enable devices with different serial interfaces to communicate effortlessly. Serial-to-serial converters help convert between RS-232 and RS-422/485; serial-to-fiber converters convert all three interfaces to optical fiber.



Serial Converters
Product Pages



93

Chassis Media Converters

Our TRC Series of rackmount chassis media converters offer up to 19 slots and a range of media converter modules to meet your diverse media conversion needs in high-density applications.



94

Serial-to-Fiber Media Converters

Moxa's industrial-grade serial-to-fiber-optic converters convert RS-232/422/485 to optical fiber, providing users with an easy and reliable way to communicate with their serial devices.



95

Serial-to-Serial Converters

Moxa's serial-to-serial media converters ensure seamless communication between RS-232 and RS-422/485 interfaces, avoiding compatibility issues that are often encountered when communicating between different serial interfaces.



96

CAN-to-Fiber, PROFIBUS-to-Fiber Converters

Moxa's fieldbus-to-fiber converters make fieldbus-to-fiber conversion easy. They also feature easy configuration and effortless troubleshooting. Our industrial-grade ICF converters can handle CAN-to-fiber and PROFIBUS-to-fiber conversions, even in harsh settings.

Chassis Media Converters



Product Series	TRC-190	TCF-142-RM
Power Parameters		
Input Voltage	TRC-190-AC models: 110 to 240 VAC TRC-190-DC-48 models: 48 VDC Redundant dual inputs	12 VDC
No. of Power Inputs	2	1
Power Consumption	TRC-190-AC models: 1.5 A @ 100 to 240 VAC TRC-190-DC-48 models: 3.2 A @ 48 VDC	150 mA @ 12 VDC
Serial Interface		
No. of Ports	–	2
Serial Standards	–	RS-232, RS-422, RS-485
Baudrate	–	50 bps to 921.6 kbps (supports non-standard baudrates)
Flow Control	–	ADDC (automatic data direction control) for RS-485
Connector	–	DB9 female
Optical Fiber	–	TCF-142-M-SC-RM models: 100BaseFX ports (multi-mode SC connector) TCF-142-M-ST-RM models: 100BaseFX ports (multi-mode ST connector) TCF-142-S-SC-RM models: 100BaseFX ports (single-mode SC connector) TCF-142-S-ST-RM models: 100BaseFX ports (single-mode ST connector)
Serial Signals		
RS-232	–	TxD, RxD, GND
RS-422	–	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	–	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	–	Data+, Data-, GND
Physical Characteristics		
Dimensions	440 x 260 x 88 mm (17.32 x 10.24 x 3.46 in)	86.8 x 136.5 x 21 mm (3.42 x 5.37 x 0.83 in)
Installation	19-inch rack mounting	–
Environmental Limits		
Ambient Relative Humidity	5 to 95% (non-condensing)	
Operating Temperature	0 to 60°C (32 to 140°F)	
Storage Temperature (Package Included)	-20 to 75°C (-4 to 167°F)	
Standards and Certifications		
EMC	EN 55032/35	
EMI	CISPR 32, FCC Part 15B Class A	
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV (AC), 1 kV (DC) IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF
Safety	UL 60950-1, UL 62368-1, EN IEC 62368-1	

Serial-to-Fiber Media Converters



Product Series	TCF-90	TCF-142	ICF-1150
Serial Interface			
No. of Ports	2		
Serial Standards	RS-232	RS-232, RS-422, RS-485	
Baudrate	300 bps to 115.2 kbps	50 bps to 921.6 kbps (supports non-standard baudrates)	
Isolation	–		1 models: 2 kV
Connector	DB9 female	7-pin terminal block	RS-232 interface: DB9 female RS-422/485 interface: 5-pin terminal block RS-232/422/485 interface: Fiber ports
Optical Fiber	100BaseFX ports Multi-mode or Single-mode ST connector	100BaseFX ports Multi-mode or Single-mode SC or ST connector	100BaseFX ports Multi-mode or Single-mode SC or ST connector
Fiber Cable Requirements	Multi-mode: 50/125 μm, 800 MHz or 62.5/125 μm, 500 MHz; Single-mode: G.652		
Typical Distance	Multi-mode: 5 km, Single-mode: 40 km		
Wavelength (Typical)	Multi-mode: 850 nm, Single-mode: 1310 nm		
Wavelength (TX Range)	Multi-mode: 840 to 860 nm, Single-mode: 1290 to 1330 nm		
Wavelength (RX Range)	Multi-mode: 800 to 900 nm, Single-mode: 1100 to 1650 nm		
Optical Power (TX Range)	Multi-mode/Single-mode: 0 to -5 dBm		Multi-mode/Single-mode: 0 to -8 dBm
Optical Power (RX Range)	Multi-mode: 0 to -20 dBm, Single-mode: 0 to -25 dBm		Multi-mode/Single-mode: 0 to -25 dBm
Optical Power (Link Budget)	Multi-mode: 15 dB, Single-mode: 20 dB		
Optical Power (Dispersion Penalty)	Multi-mode/Single-mode: 1 dB		
Serial Signals			
RS-232	TxD, RxD, GND ¹	TxD, RxD, GND	
RS-422	–	Tx+, Tx-, Rx+, Rx-, GND	
RS-485-4w	–	Tx+, Tx-, Rx+, Rx-, GND	
RS-485-2w	–	Data+, Data-, GND	
Power Parameters			
Input Current	5 to 12 VDC, 20 mA (max.)	70 to 140 mA @ 12 to 48 VDC	300 mA (max.)
Input Voltage	5 to 12 VDC		
No. of Power Inputs	1		
Physical Characteristics			
Housing	Plastic	Metal	
Dimensions	42 x 80 x 22 mm (1.65 x 3.15 x 0.87 in)	With ears: 90 x 100 x 22 mm (3.54 x 3.94 x 0.87 in) Without ears: 67 x 100 x 22 mm (2.64 x 3.94 x 0.87 in)	30.3 x 70 x 115 mm (1.19 x 2.76 x 4.53 in)
Installation	Desktop	Wall mounting	DIN-rail mounting
Environmental Limits			
Operating Temperature	0 to 60°C (32 to 140°F)	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 85°C (-40 to 185°F)
Storage Temperature (Package Included)	-20 to 75°C (-4 to 167°F)		
Ambient Relative Humidity	5 to 95% (non-condensing)		
Standards and Certifications			
EMC	EN 55032/35		
EMI	CISPR 32, FCC Part 15B Class A		
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF
Environmental Testing	IEC 60068-2-14, IEC 60068-2-3		
Hazardous Locations	–		IEC models: CID2, ATEX Zone 2, IECEx All other models: CID2, ATEX Zone 2

¹ The DTR, DSR, DCD, CTS, and RTS pins are internally shorted.

Serial-to-Serial Converters



Product Series	TCC-80/80I	TCC-100/100I	TCC-120/120I
Serial Interface			
Connector	TCC-80-DB9/80I-DB9 models: DB9 male TCC-80/80I models: Terminal block	Terminal block	
No. of Ports	2		
Serial Standards	RS-232, RS-422, RS-485		RS-422, RS-485
Isolation	TCC-80I/80I-DB9 models: 2 kV	TCC-100I/100I-T models: 2 kV	TCC-120I models: 2 kV
Baudrate	300 bps to 115.2 kbps		
Serial Signals			
RS-232	TxD, RxD, GND ¹	TxD, RxD, RTS, CTS, GND	-
RS-422	Tx+, Tx-, Rx+, Rx-, GND	Tx+, Tx-, Rx+, Rx-, RTS (optional), CTS (optional), GND	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND		
RS-485-2w	Data+, Data-, GND		
Power Parameters			
Input Current	TCC-80/80-DB9 models: 30 mA (max.) TCC-80I/80I-DB9 models: 20 mA (max.)	TCC-100/100-T models: 47 mA (max.) TCC-100I/100I-T models: 144 mA (max.)	TCC-120 models: 65 mA (max.) TCC-120I models: 180 mA (max.)
Input Voltage	5 to 12 VDC		
No. of Power Inputs	1		
Physical Characteristics			
Housing	Plastic top cover, Metal bottom plate	Metal	
Dimensions	TCC-80/80I models: 42 x 80 x 22 mm (1.65 x 3.15 x 0.87 in) TCC-80-DB9/80I-DB9 models: 42 x 91 x 23.6 mm (1.65 x 3.58 x 0.93 in)	67 x 100.4 x 22 mm (2.64 x 3.93 x 0.87 in)	
Installation	Desktop	DIN-rail mounting (with optional kit), Wall mounting	
Environmental Limits			
Operating Temperature	0 to 60°C (32 to 140°F)	Standard models: -20 to 60°C (-4 to 140°F) Wide temp. models: -40 to 85°C (-40 to 185°F)	-20 to 60°C (-4 to 140°F)
Storage Temperature (Package Included)	-20 to 75°C (-4 to 167°F)		
Ambient Relative Humidity	5 to 95% (non-condensing)		
Standards and Certifications			
EMC	EN 55032/35		
EMI	CISPR 32, FCC Part 15B Class A		
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF		
Environmental Testing	IEC 60068-2-1, IEC 60068-2-3		

¹ The DTR, DSR, DCD, CTS, and RTS pins are internally shorted.

CAN-to-Fiber, PROFIBUS-to-Fiber Converters



Product Series	ICF-1170I	ICF-1171I	ICF-1180I	ICF-1280I
Fiber Interface				
No. of Ports	1	1	1	2
Optical Fiber	100BaseFX ports Multi-mode ST connector	100BaseFX ports Single-mode or Multi-mode ST connector	100BaseFX ports Multi-mode or Single-mode ST connector	100BaseFX ports Multi-mode or Single-mode ST connector
Fiber Cable Requirements	50/125 μm 62.5/125 μm	Multi-mode: 62.5/125 μm Single-mode: 9/125 μm	-	-
Typical Distance	2 km	Multi-mode: 2 km Single-mode: 40 km	Multi-mode: 4 km Single-mode: 45 km	Multi-mode: 4 km Single-mode: 45 km
Wavelength (Typical)	850 nm	1310 nm	Multi-mode: 820 nm Single-mode: 1310 nm	Multi-mode: 820 nm Single-mode: 1310 nm
Wavelength (TX Range)	840 to 860 nm	1280 to 1340 nm	-	-
Wavelength (RX Range)	800 to 900 nm	1100 to 1600 nm	-	-
Optical Power (TX Range)	0 to -5 dBm	Multi-mode: -10 to -20 dbm Single-mode: 0 to -5 dbm	Multi-mode: -14 dBm Single-mode: -8 dBm	Multi-mode: -14 dBm Single-mode: -8 dBm
Optical Power (RX Range)	0 to -20 dBm	Multi-mode: -3 to -32 dbm Single-mode: -3 to -34 dbm	Multi-mode: -28 dBm Single-mode: -29 dBm	Multi-mode: -28 dBm Single-mode: -29 dBm
Optical Power (Link Budget)	15 dB	Multi-mode: 12 dB Single-mode: 29 dB	Multi-mode: 14 dB Single-mode: 21 dB	Multi-mode: 14 dB Single-mode: 21 dB
Optical Power (Dispersion Penalty)	1 dB	Multi-mode: 3 dB Single-mode: 1 dB	-	-
CAN Interface				
Isolation	2 kV (built-in)			-
No. of Ports	1			-
Signals	CAN_L, CAN_H, CAN Signal GND			-
Terminator	N/A, 120 ohms (by DIP)			-
Protocols	CAN 2.0A, CAN 2.0B	CAN 2.0A, CAN 2.0B, CAN FD compatible with ISO 11898 standard		-
PROFIBUS Interface				
Industrial Protocols	-			PROFIBUS DP
No. of Ports	-			1
Connector	-			DB9 female
Baudrate	-			9600 bps to 12 Mbps
Isolation	-			2 kV (built-in)
Power Parameters				
Input Current	221 mA (max.)	188.5 mA (max.)	269 mA (max.)	370 mA (max.)
Input Voltage	12 to 48 VDC			
No. of Power Inputs	2			
Power Connector	Terminal block			
Physical Characteristics				
Housing	Metal			
Dimensions	30.3 x 70 x 115 mm (1.19 x 2.76 x 4.53 in)			39 x 115 x 70 mm (1.54 x 4.53 x 2.76 in)
Installation	DIN-rail mounting	DIN-rail mounting Wall mounting (with optional kit)		DIN-rail mounting
Environmental Limits				
Operating Temperature	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 85°C (-40 to 167°F)	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)		-
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)			
Ambient Relative Humidity	5 to 95% (non-condensing)			
Standards and Certifications				
EMC	EN 55032/35			
EMI	CISPR 32, FCC Part 15B Class A			
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV, Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 0.5 kV IEC 61000-4-5 Surge: Power: 0.5 kV IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF	
Safety	EN IEC 62368-1, UL 508		UL 62368-1, EN IEC 62368-1	
Maritime	-		DNV	
Hazardous Locations	-		ATEX, CID2, IECEx	

Protocol Gateways

Our fieldbus-to-Ethernet MGate gateways do more than just link serial devices to Ethernet networks—they also facilitate multiple connections and protocol conversions, helping you handle large volumes of data. The MGate supports various protocols, including Modbus TCP, PROFINET, EtherNet/IP, IEC 61850, CAN, EtherCAT, and more, catering to energy and industrial automation applications.



Protocol Gateways Product Pages



Find an MGate for Energy Applications

Device A / Device B	Modbus RTU/ASCII Server	Modbus RTU/ASCII Client	DNP3 Serial Outstation	DNP3 Serial Master	IEC 60870-5-101 Slave	IEC 60870-5-101 Master	Modbus TCP Server	Modbus TCP Client	DNP3 TCP/UDP Outstation	DNP3 TCP/UDP Client	IEC 60870-5-104 Server	IEC 60870-5-104 Client	BACnet/IP Server	BACnet/IP Client	IEC 61850 MMS Client	IEC 61850 MMS Server
Modbus RTU/ASCII Server	-	MB3000-G2 ¹	-	-	-	-	5105	MB3000-G2 ³ 5109 5105	-	5109	-	5114	-	5217	5119	-
Modbus RTU/ASCII Client	MB3000-G2 ¹	-	-	-	-	-	MB3000-G2 ³ 5105 5109	5105 5109	5109	5109	5114	-	5217	-	-	5192
DNP3 Serial Outstation	-	-	-	-	-	-	-	5109	-	5109	-	-	-	-	5119	-
DNP3 Serial Master	-	-	-	-	-	-	5109	5109	5109	-	-	-	-	-	-	5192
IEC 60870-5-101 Slave	-	-	-	-	-	-	-	5114	-	-	-	5114	-	-	5119	-
IEC 60870-5-101 Master	-	-	-	-	-	-	5114	-	-	-	5114	-	-	-	-	5192
Modbus TCP Server	5105	MB3000-G2 ² 5109 5105	-	5109	-	5114	-	MB3000-G2 ²	-	5109	-	5114	-	5217	5119	-
Modbus TCP Client	MB3000-G2 ² 5109 5105	5105 5109	5109	5109	5114	-	MB3000-G2 ²	5109	5109	5109	5114	-	5217	-	-	5192
DNP3 TCP/UDP Outstation	-	5109	-	5109	-	-	-	5109	-	-	-	-	-	-	5119	-
DNP3 TCP/UDP Client	5109	5109	5109	-	-	-	5109	5109	-	-	-	-	-	-	-	5192
IEC 60870-5-104 Server	-	5114	-	-	-	5114	-	5114	-	-	-	-	-	-	5119	-
IEC 60870-5-104 Client	5114	-	-	-	5114	-	5114	-	-	-	-	-	-	-	-	5192
BACnet/IP Server	-	5217	-	-	-	-	-	5217	-	-	-	-	-	-	-	-
BACnet/IP Client	5217	-	-	-	-	-	5217	-	-	-	-	-	-	-	-	-
IEC 61850 MMS Client	5119	-	5119	-	5119	-	5119	-	5119	-	5119	-	-	-	-	-
IEC 61850 MMS Server	-	5192	-	5192	-	5192	-	5192	-	5192	-	5192	-	-	-	-

¹ Applies only to the MB3270-G2/3470-G2/MB3270/3660 Series.
² Applies to the MB3270-G2/3470-G2/MB3270/3660 Series.
³ Applies to the MB3x70-G2/MB3000 Series.

Find an MGate for Industrial Automation Applications

Device A / Device B	Modbus RTU/ASCII Server	Modbus RTU/ASCII Client	Proprietary Serial Server	PROFIBUS Slave	PROFIBUS Master	CAN Slave ⁴	DF1	Modbus TCP Server	Modbus TCP Client	EtherNet/IP Adapter	EtherNet/IP Scanner	PROFINET Controller	EtherCAT Master	SNMP
Modbus RTU/ASCII Server	-	MB3000-G2 ¹	-	-	4101 5111	5118 ³	-	5105	MB3000-G2 ² 5109 5105	5105	5105 5135/5435	5103 5134	5216	-
Modbus RTU/ASCII Client	MB3000-G2 ¹	-	-	-	4101 5111	5118 ³	-	MB3000-G2 ² 5109 5105	5105 5109	5105	5105	5103	-	-
Proprietary Serial Server	-	-	-	-	-	-	-	-	-	-	-	-	5216	-
PROFIBUS Slave	-	-	-	-	-	-	-	5101	5101	-	-	5102	-	-
PROFIBUS Master	4101 5111	4101 5111	-	-	-	-	-	5111	5111	-	5111	5111	-	-
CAN Slave ⁴	5118 ³	5118 ³	-	-	-	-	-	5118 ³	5121 5118 ³	5118 ³	5122 5118 ³	5123 5118 ³	-	5121 5122 5123
DF1	-	-	-	-	-	-	-	-	-	EIP3000	EIP3000	-	-	-
Modbus TCP Server	5105	MB3000-G2 ² 5109 5105	-	5101	5111	5118 ³	-	-	MB3000-G2 ²	5105	5105 5135/5435	5103 5134	-	-
Modbus TCP Client	MB3000-G2 ² 5109 5105	5105 5109	-	5101	5111	5121 5118 ³	-	MB3000-G2 ²	5109	5105	5105	5103	-	-
EtherNet/IP Adapter	5105	5105	-	-	-	5118 ³	EIP3000	5105	5105	-	-	-	-	-
EtherNet/IP Scanner	5105 17/18	5105	-	-	5111	5122 5118 ³	EIP3000	5105 5135/5435	5105	-	-	5103	-	-
PROFINET Controller	5103 5134	5103	-	5102	5111	5123 5118 ³	-	5103 5134	5103	-	5103	-	-	-
EtherCAT Master	5216	-	5216	-	-	-	-	-	-	-	-	-	-	-
SNMP	-	-	-	-	-	5121 5122 5123	-	-	-	-	-	-	-	-

¹ Applies to the MB3270/3660 and MB3270-G2/3470-G2 Series.
² Applies to the MB3x70-G2/MB3000 Series.
³ Applies to J1939 only.
⁴ CANopen/J1939/Proprietary CAN (CAN 2.0A/B).

Industrial Ethernet Gateways



Product Series	MGate MB3180/MB3280/MB3480	MGate MB3170/MB3270	MGate MB3660	MGate MB3170-G2/MB3270-G2/MB3470-G2	MGate MB3360-8-DT-G2/MB3660I-8-DT-G2/MB3660-8-DTS-J-G2	MGate 5217	
Ethernet Interface							
10/100BaseT(X) Ports (RJ45 Connector)	1 (Auto MDI/MDI-X connection)	2 (1 IP, Ethernet cascade, Auto MDI/MDI-X connection)	2 (2 IPs, Auto MDI/MDI-X connection)		2 (Auto MDI/MDI-X connection)		
Magnetic Isolation Protection	1.5 kV (built-in)						
Ethernet Software Features							
Industrial Protocols	Modbus TCP Client, Modbus TCP Server						
Management	All models: ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, v2c/v3, TCP/IP, Telnet, UDP MGate MB3280/MB3480 models: HTTPS, SMTP, SNMP Trap, NTP Client	ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP Trap, SNMPv1/v2c/v3, TCP/IP, Telnet, UDP, NTP Client	ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP Trap, SNMPv1/v2c/v3, TCP/IP, Telnet, UDP, NTP Client, RADIUS	ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP Trap, Inform, SNMPv1/v2c/v3, TCP/IP, UDP, LLDP	ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP, RADIUS, TACACS+	ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP Trap, SNMPv1/v2c/v3, TCP/IP, Telnet, UDP, NTP Client	
BACnet/IP Mode	Client, Server						
Memory Size	MGate 5217-1200-T models: 1200 points MGate 5217-600-T models: 600 points						
Serial Interface							
No. of Ports	MGate MB3180 models: 1 MGate MB3280 models: 2 MGate MB3480 models: 4	MGate MB3170 models: 1 MGate MB3270 models: 2	MGate MB3660-8 models: 8 MGate MB3660-16 models: 16	MGate MB3170-G2 models: 1 MGate MB3270-G2 models: 2 MGate MB3470-G2 models: 4	8	2	
Connector	DB9 male	MGate MB3170/MB3170I models: DB9 male for RS-422/485 MGate MB3270/MB3270I models: 2 x DB9 male	MGate MB3660-8/16 models: DB9 male MGate MB3660-8/16-J models: RJ45	MGate MB3170-G2/MB3270-G2/MB3470-G2: DB9 male MGate MB3270-TB-G2/MB3470-TB-G2: Terminal block	MGate MB3660-8-DT-G2: DB9 male MGate MB3660I-8-DT-G2: DB9 male MGate MB3660-8-DTS-J-G2: RJ45	DB9 male	
Serial Standards	RS-232, RS-422, RS-485 (software-selectable)						
Baudrate	50 bps to 921.6 kbps MGate MB3170-G2/MB3270-G2/MB3470-G2 models: Supports non-standard baudrates MGate MB3660-8-DT-G2/MGate MB3660I-8-DT-G2/MGate MB3660-8-DTS-J-G2 models: Supports non-standard baudrates						
RS-485 Data Direction Control	ADDC (automatic data direction control)						
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms		1 kilo-ohm, 150 kilo-ohms (software-configurable)		1 kilo-ohm, 150 kilo-ohms		
Terminator for RS-485	MGate MB3180 models: None MGate MB3280/MB3480 models: 120 ohms	120 ohms		120 ohms (software-configurable)	120 ohms		
Isolation	I models: 2 kV		I models: 2 kV	I models: 2 kV	I models: 2 kV	2 kV (built-in)	
Serial Software Features							
Industrial Protocols	Modbus RTU/ASCII Client, Modbus RTU/ASCII Server		Modbus RTU/ASCII Client, Modbus RTU/ASCII Server, Proprietary Serial Client		Modbus RTU/ASCII Client, Modbus RTU/ASCII Server		
Power Parameters							
Input Voltage	12 to 48 VDC		AC models: 100 to 240 VAC (50/60 Hz) DC models: 20 to 60 VDC (1.5 kV isolation) All models: Redundant dual inputs	12 to 48 VDC Redundant dual inputs	12 to 48 VDC	24 VAC 12 to 48 VDC	
Environmental Limits							
Operating Temperature	MGate MB3180/3480 models: 0 to 55°C (32 to 131°F) MGate MB3280 models: 0 to 60°C (32 to 140°F)	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	0 to 60°C (32 to 140°F)	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	-40 to 75°C (-40 to 167°F)		
Standards and Certifications							
Safety	MB3180 models: UL 60950-1, EN 62368-1 MB3280 models: IEC 62368-1, IEC 60950-1, UL 60950-1, UL 62368-1 MB3480 models: IEC 62368-1, UL 62368-1, IEC 60950-1	UL 60950-1, IEC 60950-1, EN 62368-1, UL 508	All models excluding-J models: IEC 62368-1, UL 62368-1, IEC 60950-1, UL 60950-1	UL 62368-1, IEC 62368-1	EN IEC 62368-1, UL 62368-1, UL 60950		
EMC	EN 55032/35						
EMI	FCC Part 15B Class A						
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV (MB3180/MB3280) IEC 61000-4-5 Surge: Power: 1 kV; Signal: 2 kV (MB3480) IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF IEC 61000-4-11	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV (Ethernet, Serial signal) IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV (Ethernet, Serial signal) IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11 DIPS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 0.5 kV (Ethernet, Serial signal) IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF IEC 61000-4-11	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF
Hazardous Locations	ATEX, CID2, IECEx		ATEX, CID2, IECEx		ATEX, CID2, IECEx		
Maritime	DNV						

Industrial Ethernet Gateways



Product Series	MGate 4101-MB-PBS	MGate 5101-PBM-MN	MGate 5102-PBM-PN	MGate 5111	MGate 5216	MGate 5103	MGate 5134
Ethernet Interface							
10/100BaseT(X) Ports (RJ45 Connector)	–	1 (Auto MDI/MDI-X connection)	2 (Auto MDI/MDI-X connection)				
Magnetic Isolation Protection	–	1.5 kV (built-in)					
Ethernet Software Features							
Industrial Protocols	–	Modbus TCP Client, Modbus TCP Server	PROFINET IO Device	Modbus TCP Client, Modbus TCP Server, PROFINET IO Device, EtherNet/IP Adapter	EtherCAT Slave	Modbus TCP Client, Modbus TCP Server, PROFINET IO Device, EtherNet/IP Adapter	Modbus TCP Client, PROFINET IO Device
Management	–	ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP Trap, SNMPv1/v2c/v3, TCP/IP, Telnet, SSH, UDP, NTP Client					ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP Trap, SNMPv1/v2c/v3, TCP/IP, UDP, NTP Client
Serial Interface							
No. of Ports	1	–	–	1	2	–	1
Connector	DB9 male	–	–	–	DB9 male	–	–
Serial Standards	RS-232/422/485	–	–	–	RS-232/422/485	–	–
Baudrate	50 bps to 921.6 kbps	–	–	–	50 bps to 921.6 kbps	–	300 bps to 921.6 kbps
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms	–	–	–	1 kilo-ohm, 150 kilo-ohms	–	1 kilo-ohm, 150 kilo-ohms (software-configurable)
Terminator for RS-485	120 ohms	–	–	–	120 ohms	–	120 ohms (software-configurable)
Isolation	I models: 2 kV	–	–	–	2 kV (built-in)	–	–
Serial Software Features							
Industrial Protocols	Modbus RTU/ASCII Client, Modbus RTU/ASCII Server	–	–	Modbus RTU/ASCII Client, Modbus RTU/ASCII Server	Modbus RTU/ASCII Serial Client	Modbus RTU/ASCII Client, Modbus RTU/ASCII Server	Modbus RTU/ASCII Client
PROFIBUS Interface							
Industrial Protocols	PROFIBUS DP-V0 Slave	PROFIBUS DP-V1 Master		PROFIBUS DP-V0 Slave	–		
No. of Ports	1						
Connector	DB9 female						
Baudrate	9600 bps to 12 Mbps						
Isolation	2 kV (built-in)						
Power Parameters							
Input Voltage	12 to 48 VDC						
Environmental Limits							
Operating Temperature	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)						Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)
Standards and Certifications							
Safety	EN IEC 62368-1, UL 62368-1, UL 60950-1	EN IEC 62368-1, UL 60950-1	EN IEC 62368-1, UL 508	EN IEC 62368-1, UL 61010-2-201	EN IEC 61010-2-201, UL 61010-2-201	EN IEC 62368-1, UL 508	EN IEC 61010-2-201, UL 61010-2-201
EMC	EN 55032/35			EN 61000-6-2/-6-4		EN 55032/35	EN 61000-6-2/-6-4
EMI	FCC Part 15B Class A		CISPR 32, FCC Part 15B Class B	FCC Part 15B Class A		CISPR 32, FCC Part 15B Class B	FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF
Hazardous Locations	ATEX, CID2, IECEx				–	ATEX, CID2, IECEx	–

Industrial Ethernet Gateways



Product Series	MGate EIP3170/EIP3270	MGate 5105-MB-EIP	MGate 5135/5435	MGate 5118	MGate 5121	MGate 5122	MGate 5123
Ethernet Interface							
10/100BaseT(X) Ports (RJ45 Connector)	2 (Auto MDI/MDI-X connection)						
Magnetic Isolation Protection	1.5 kV (built-in)						
Ethernet Software Features							
Industrial Protocols	Ethernet/IP (PCCC)	Modbus TCP Client, Modbus TCP Server, EtherNet/IP Scanner, EtherNet/IP Adapter, MQTT	Modbus TCP Client, EtherNet/IP Adapter	Modbus TCP Client, Modbus TCP Server, PROFINET IO Device, EtherNet/IP Scanner, EtherNet/IP Adapter	Modbus TCP Server	EtherNet/IP Adapter	PROFINET IO Device
Management	ARP, DHCP Client, SNMPv1, TCP/IP, Telnet, UDP	ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP Trap, SNMPv1/v2c/v3, TCP/IP, Telnet, SSH, UDP, NTP Client	ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP Trap, SNMPv1/v2c/v3, TCP/IP, UDP, NTP Client	ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP Trap, SNMPv1/v2c/v3, TCP/IP, Telnet, SSH, UDP, NTP Client	ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP Trap, SNMPv1/v2c/v3, TCP/IP, UDP, NTP Client		
Serial/CAN Interface							
Industrial Protocols	DF1	Modbus RTU/ASCII Client, Modbus RTU/ASCII Server	Modbus RTU/ASCII Client	J1939, Modbus RTU/ASCII Client, Modbus RTU/ASCII Server	CANopen, J1939, Proprietary CAN (CAN 2.0A/B)		
No. of Ports	Serial MGate EIP3170 models: 1 MGate EIP3270 models: 2	1 x Serial	Serial MGate 5135 models: 1 MGate 5435 models: 4	1 x Serial 1 x CAN	1 x CAN		
Connector	MGate EIP3170 models: DB9 male for RS-232, Terminal block for RS-422 MGate EIP3270 models: 2 x DB9 male	Serial: DB9 male	Serial: DB9 male	Serial: DB9 male CAN: Spring-type Euroblock terminal	CAN: Spring-type Euroblock terminal		
Serial Standards	RS-232, RS-422		RS-232, RS-422, RS-485		-		
Baudrate	Serial: 1200 bps to 921.6 kbps	Serial: 50 bps to 921.6 kbps	Serial: 300 bps to 921.6 kbps	Serial: 50 bps to 921.6 kbps J1939: 250 kbps, 500 kbps, 1 Mbps	CANopen, Proprietary CAN (CAN2.0A/B): 10 kbps, 20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 800 kbps, 1 Mbps J1939: 250 kbps, 500 kbps, 1 Mbps		
Isolation	1 models: 2 kV	2 kV (built-in)					
Pull High/Low Resistor for RS-485	-	1 kilo-ohm, 150 kilo-ohms (software-configurable)	1 kilo-ohm, 150 kilo-ohms (software-configurable)	1 kilo-ohm, 150 kilo-ohms	-		
Terminator	-	RS-485: 120 ohms	RS-485: 120 ohms (software-configurable)	RS-485: 120 ohms CAN: 120 ohms	CAN: 120 ohms (software-configurable)		
Power Parameters							
Input Voltage	12 to 48 VDC						
Environmental Limits							
Operating Temperature	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)		Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)		
Standards and Certifications							
Safety	EN IEC 62368-1, UL 60950-1, UL 508	EN IEC 62368-1, UL 508	EN IEC 61010-2-201, UL 61010-2-201	EN IEC 62368-1, UL 61010-2-201	EN IEC 61010-2-201, UL 61010-2-201		
EMI	FCC Part 15B Class A	CISPR 32, FCC Part 15B Class B	FCC Part 15B Class A				
EMC	EN 55032/35		EN 61000-6-2/-6-4				
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz; 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 4 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz; 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz; 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz; 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz; 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz; 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz; 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz; 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz; 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF		
Hazardous Locations	ATEX, CID2, IECEx		-	ATEX, CID2, IECEx	-		
Maritime	DNV						

Industrial Ethernet Gateways



Product Series	MGate 5109	MGate 5114	MGate 5119	MGate 5192
Ethernet Interface				
10/100BaseT(X) Ports (RJ45 Connector)	2 (Auto MDI/MDI-X connection)			
Magnetic Isolation Protection	1.5 kV (built-in)			
Ethernet Software Features				
Industrial Protocols	Modbus TCP Client, Modbus TCP Server, DNP3 TCP Client, DNP3 TCP/UDP Outstation	Modbus TCP Client, Modbus TCP Server, IEC 60870-5-104 Client, IEC 60870-5-104 Server	Modbus TCP Client, IEC 61850 MMS Server, DNP3 TCP Client	IEC 61850 Client, Modbus TCP Server, DNP3 TCP/UDP Outstation, IEC 60870-5-104 Server
Management	ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP Trap, SNMPv1/v2c/v3, TCP/IP, Telnet, SSH, UDP, NTP Client			ARP, DHCP Client, DNS, HTTP, HTTPS, SMTP, SNMP Trap, SNMPv1/v2c/v3, TCP/IP, UDP, NTP Client
Serial Interface				
No. of Ports	1			
Connector	DB9 male			
Serial Standards	RS-232, RS-422, RS-485			
Baudrate	50 bps to 921.6 kbps			300 bps to 921.6 kbps
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms			1 kilo-ohm, 150 kilo-ohms (software-configurable)
Terminator for RS-485	120 ohms			120 ohms (software-configurable)
Isolation	2 kV (built-in)			
Serial Software Features				
Industrial Protocols	Modbus RTU/ASCII Client, Modbus RTU/ASCII Server, DNP3 Serial Client, DNP3 Serial Outstation	Modbus RTU/ASCII Client, Modbus RTU/ASCII Server, IEC 60870-5-101 Client (Balanced/Unbalanced), IEC 60870-5-101 Server (Balanced/Unbalanced)	Modbus RTU/ASCII Client, IEC 60870-5-101 Client (Balanced/Unbalanced), DNP3 Serial Client	Modbus RTU/ASCII Server, DNP3 Serial Outstation, IEC 60870-5-101 Server (Balanced/Unbalanced)
IEC 61850				
Mode	-		MMS Server	MMS Client
Max. No. of Information Objects	-		1200 points	5000 points
Power Parameters				
Input Voltage	12 to 48 VDC			
Environmental Limits				
Operating Temperature	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)		-40 to 75°C (-40 to 167°F)	
Standards and Certifications				
Safety	EN IEC 62368-1, UL 60950-1, UL 508		EN IEC 62368-1, UL 60950-1, UL 62368-1	EN IEC 61010-2-201, UL 61010-2-201
EMC	EN 55032/35			
EMI	CISPR 32, FCC Part 15B Class B		FCC Part 15B Class A	
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz; 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz; 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF		IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz; 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz; 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF	
Hazardous Locations	ATEX, CID2, IECEx		-	
Power Substation	-		IEEE 1613, IEC 61850-3	



USB-to-Serial Converters/USB Hubs

Moxa's UPort Series of USB-to-serial converters provides SuperSpeed USB 3.2 and Hi-Speed USB 2.0 interfaces. Moxa's USB hubs provide SuperSpeed USB 3.2 speeds up to 5 Gbps. Both come with 15 kV of ESD protection and metal housing to endure harsh environments, making them ideal for ATMs, kiosks, POS stations, and data acquisition applications.



USB-to-serial Converters/
USB Hubs Product Pages



105

USB-to-Serial Converters

Moxa's UPort USB-to-serial converters provide computers with high performance, industrial-grade connections for up to 16 serial devices over a single USB port. A wide range of converters are available with features that include SuperSpeed USB 3.2 and Hi-Speed USB 2.0, advanced UARTs for high-end serial performance, COM port mapping, fixed-base COM functionality, and more.



106

Industrial-grade USB Hubs

The industrial-grade UPort Series of USB hubs is designed with the ruggedness and reliability needed for industrial applications. Each port has ESD Level 4 protection and provides SuperSpeed USB 3.2 data rates up to 5 Gbps—even for heavy-load applications. In the UPort Series, you'll find models that have dual power inputs, DIN-rail mounting options, and wide temperature ranges to operate reliably in harsh conditions.

USB-to-Serial Converters



Product Series	UPort 1100	UPort 1200-G2	UPort 1400-G2	UPort 1600-8-G2	UPort 2210/2410
USB Interface					
Speed	12 Mbps	5 Gbps, 480 Mbps, 12 Mbps			12 Mbps, 480 Mbps
USB Connector	UPort 1150I models: USB type B All other models: USB type A	USB type B		All models: USB type B (UFP) UPort 1650-8-G2-Hub: type A (DFP)	USB type B
USB Standards	USB 2.0 compatible, USB 1.0/1.1 compliant	USB 3.2 Gen 1, USB 1.1/2.0 compliant			USB 1.1/2.0 compliant
Serial Interface					
No. of Ports	1	2	4	8	UPort 2210 models: 2 UPort 2410 models: 4
Connector	DB9 male				
Baudrate	50 bps to 921.6 kbps		50 bps to 921.6 kbps (supports non-standard baudrates)		50 bps to 921.6 kbps
Data Bits	5, 6, 7, 8				
Stop Bits	1, 1.5, 2				
Parity	None, Even, Odd, Space, Mark				
Flow Control	None, RTS/CTS, XON/XOFF				
Isolation	I models: 2 kV				-
Serial Standards	RS-232, RS-422, or RS-485 (refer to the product's datasheet for detailed specifications)				RS-232
FIFO	64 bytes		512 bytes		-
Pull High/Low Resistor for RS-485	UPort 1150I models: 1 kilo-ohm, 150 kilo-ohms		1 kilo-ohm, 150 kilo-ohms		-
Terminator for RS-485	UPort 1150I models: 120 ohms		120 ohms		-
Surge	-		0.5 kV		-
Serial Software Features					
Windows Drivers	Windows 11/10/8.1/8/7/Vista/ME/XP, Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT	Windows 11/10/8.1/8/7/Vista/XP, Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2000			Windows 11/10/8.1/8/7/Vista/XP, Windows Server 2022/2019/2016/2012 R2/2012/2008 R2/2008/2000
Linux Drivers	Kernel 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x	Kernel 6.x, 5.x, 4.x			Kernel 6.x, 5.x, 4.x, 3.x, 2.6.x
Mac Drivers	Intel 64: 14, 13, 12, 11, 10.1x	Intel 64: 13, 12, 11, 10.1x			Intel 64: 11, 10.1x
Arm®-based Platform Support	Linux kernel 6.x, 5.x Windows 11 macOS 14, 13, 12, 11	Linux kernel 6.x, 5.x Windows 11			Linux kernel 6.x, 5.x
Power Parameters					
Input Voltage	5 VDC	5 VDC by USB bus power	5 VDC by USB bus power or 12 to 48 VDC by external power adaptor	UPort 1610-8-G2/1650-8-G2 models: 5 VDC by USB bus power All models: 12 to 48 VDC by external power adaptor	5 VDC
Input Current	UPort 1110 models: 30 mA UPort 1130 models: 60 mA UPort 1130I models: 65 mA UPort 1150 models: 77 mA UPort 1150I models: 260 mA	UPort 1250-G2 models: 160 mA @ USB 2.0, 320 mA @ USB 3.2 UPort 1250I-G2 models: 240 mA @ USB 2.0, 400 mA @ USB 3.2	UPort 1410-G2 models: 200 mA @ 12 VDC UPort 1450-G2 models: 240 mA @ 12 VDC UPort 1450I-G2 models: 340 mA @ 12 VDC	UPort 1610-8-G2 models: 260 mA @ 12 VDC UPort 1650-8-G2 models: 350 mA @ 12 VDC UPort 1650I-8-G2 models: 530 mA @ 12 VDC UPort 1650-8-G2-Hub: 2,250 mA @ 12 VDC	UPort 2210 models: 140 mA @ 5 VDC UPort 2410 models: 240 mA @ 5 VDC
Physical Characteristics					
Housing	UPort 1150I models: Metal All other models: ABS + Polycarbonate (PC)	Metal			Polycarbonate (PC)
Dimensions	UPort 1150I models: 52 x 80 x 22 mm (2.05 x 3.15 x 0.87 in) All other models: 37.5 x 20.5 x 60 mm (1.48 x 0.81 x 2.36 in)	75.8 x 25.0 x 111.0 mm (2.98 x 0.98 x 4.37 in)	185 x 30 x 90.6 mm (7.28 x 1.18 x 3.57 in)	216 x 41.5 x 121.6 mm (8.50 x 1.63 x 4.79 in)	UPort 2210 models: 70 x 35 x 120 mm (2.76 x 1.38 x 4.72 in) UPort 2410 models: 80 x 35 x 185 mm (3.15 x 1.38 x 7.28 in)
Environmental Limits					
Operating Temperature	0 to 55°C (32 to 131°F)	Standard models: 0 to 60°C (32 to 140°F), Wide temp. models: -40 to 75°C (-40 to 167°F)			0 to 55°C (32 to 131°F)
Storage Temperature	-20 to 70°C (-4 to 158°F)	-40 to 75°C (-40 to 167°F)			-20 to 70°C (-4 to 158°F)
Standards and Certifications					
EMC	EN 55032/35				EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A				
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m IEC 61000-4-8 PFMF		IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m IEC 61000-4-8 PFMF		IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m IEC 61000-4-8 PFMF
Safety	EN IEC 62368-1, UL 62368-1, KC			All models: UL 508 UPort 407 models: BSMI, KC	-
MTBF					
Standards	Telcordia (Bellcore), GB				
Time	UPort 407A models: 1,467,922 hrs UPort 404A models: 2,107,973 hrs	UPort 207A models: 1,957,123 hrs UPort 204A models: 2,678,801 hrs	UPort 404 models: 1,490,340 hrs UPort 407 models: 1,111,361 hrs	UPort 204 models: 1,577,573 hrs UPort 207 models: 1,059,201 hrs	
Package Contents					
Device	1 x UPort 400A Series USB hub	1 x UPort 200A Series USB hub	1 x UPort 404/407 Series USB hub	1 x UPort 204/207 Series USB hub	
Cable	1 x USB 3.2 Gen 1 type A male to USB type B male cable with latch and screw lock, 1.2 m	1 x USB 3.2 Gen 1 type A male to USB type B male cable, 1.2 m	1 x USB type A male to USB type B male		
Power Supply	1 x power adapter, suitable for your region (for standard temperature models only)	1 x power adapter, suitable for your region	1 x power adapter, universal (standard temperature models only)	1 x power adapter, universal	
Installation Kit	1 x terminal block, 3-pin, 3.5 mm 4 x rubber stands 1 x wall-mounting kit 6 x Nylok screws	4 x rubber stands	1 x wall-mounting kit	-	

USB Hubs




Product Series	UPort 400A	UPort 200A	UPort 404/407	UPort 207/204
USB Interface				
USB Standards	USB 3.2 Gen 1 USB 1.1/2.0 compliant		USB 1.1/2.0 compliant	
Speed	5 Gbps		12 Mbps, 480 Mbps	
USB Connector	UFP: type B, DFP: type A			
No. of USB Ports	UPort 404A models: 5 (UFP: 1, DFP: 4) UPort 407A models: 8 (UFP: 1, DFP: 7)	UPort 204A models: 5 (UFP: 1, DFP: 4) UPort 207A models: 8 (UFP: 1, DFP: 7)	UPort 404 models: 4 UPort 407 models: 7	UPort 204 models: 4 UPort 207 models: 7
Power Parameters				
Input Voltage	12 to 48 VDC	12 VDC	12 to 40 VDC	
Power Connector	Power jack, 3-pin terminal block	Power jack	Power jack, 3-pin terminal block	Power jack
Reverse Polarity Protection	Supported		-	
Input Current	UPort 407A models: 4.75 A @ 12 VDC UPort 404A models: 2.8 A @ 12 VDC	UPort 207A models: 4.5 A @ 12 VDC UPort 204A models: 2.65 A @ 12 VDC	UPort 404 models: 1.3 A @ 12 VDC UPort 407 models: 2.3 A @ 12 VDC	UPort 204 models: 1.21 A @ 12 VDC UPort 207 models: 2.17 A @ 12 VDC
Output Power Rating	Port 1: 900/1500 mA @ 5 VDC (BC 1.2 compatible) All other ports: 900 mA @ 5 VDC		500 mA @ 5 VDC	
Physical Characteristics				
Dimensions	UPort 407A models: 80 x 27 x 140 mm (3.15 x 1.06 x 5.51 in) UPort 404A models: 85 x 27 x 100 mm (3.35 x 1.06 x 3.94 in)	UPort 207A models: 80 x 27 x 140 mm (3.15 x 1.06 x 5.51 in) UPort 204A models: 85 x 27 x 100 mm (3.35 x 1.06 x 3.94 in)	UPort 404 models: 80 x 35 x 130 mm (3.15 x 1.38 x 5.12 in) UPort 407 models: 100 x 35 x 192 mm (3.94 x 1.38 x 7.56 in)	UPort 204 models: 70 x 35 x 120 mm (2.76 x 1.38 x 4.72 in) UPort 207 models: 80 x 35 x 185 mm (3.15 x 1.38 x 7.28 in)
Standards and Certifications				
EMC	EN 55032/35		All models: EN 55032/24 UPort 407 models: BSMI	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A			
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m IEC 61000-4-8 PFMF		IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m IEC 61000-4-8 PFMF	
Safety	EN IEC 62368-1, UL 62368-1, KC			All models: UL 508 UPort 407 models: BSMI, KC
MTBF				
Standards	Telcordia (Bellcore), GB			
Time	UPort 407A models: 1,467,922 hrs UPort 404A models: 2,107,973 hrs	UPort 207A models: 1,957,123 hrs UPort 204A models: 2,678,801 hrs	UPort 404 models: 1,490,340 hrs UPort 407 models: 1,111,361 hrs	UPort 204 models: 1,577,573 hrs UPort 207 models: 1,059,201 hrs
Package Contents				
Device	1 x UPort 400A Series USB hub	1 x UPort 200A Series USB hub	1 x UPort 404/407 Series USB hub	1 x UPort 204/207 Series USB hub
Cable	1 x USB 3.2 Gen 1 type A male to USB type B male cable with latch and screw lock, 1.2 m	1 x USB 3.2 Gen 1 type A male to USB type B male cable, 1.2 m	1 x USB type A male to USB type B male	
Power Supply	1 x power adapter, suitable for your region (for standard temperature models only)	1 x power adapter, suitable for your region	1 x power adapter, universal (standard temperature models only)	1 x power adapter, universal
Installation Kit	1 x terminal block, 3-pin, 3.5 mm 4 x rubber stands 1 x wall-mounting kit 6 x Nylok screws	4 x rubber stands	1 x wall-mounting kit	-

Multiport Serial Boards

Backed by over thirty years of experience in multiport serial board technology and development, Moxa stands out in the market with its vast selection of industrial-grade multiport serial cards. Moxa offers serial boards for a variety of slot types, including Mini PCIe, PCI Express (PCIe), Universal PCI, and PC/104.



Multiport Serial Boards
Product Pages

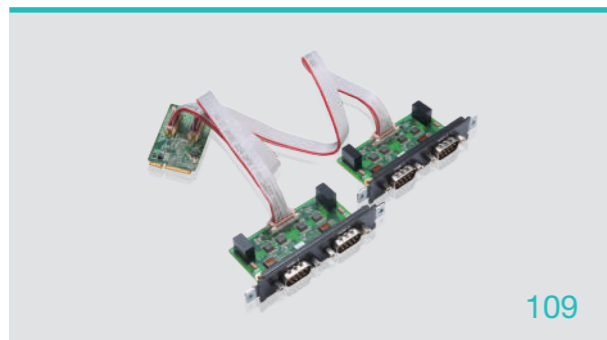

109

PCI Express (PCIe) Serial Boards


Our PCI Express boards are designed for factory automation, kiosk, and ATM applications, and they are a top choice of industrial automation engineers and system integrators. They support many operating systems, including Windows, Linux, and even UNIX.



112

Universal PCI Serial Boards

Our Universal PCI serial boards are designed for factory automation, kiosk, and ATM applications, and for use by industrial automation system manufacturers and system integrators.

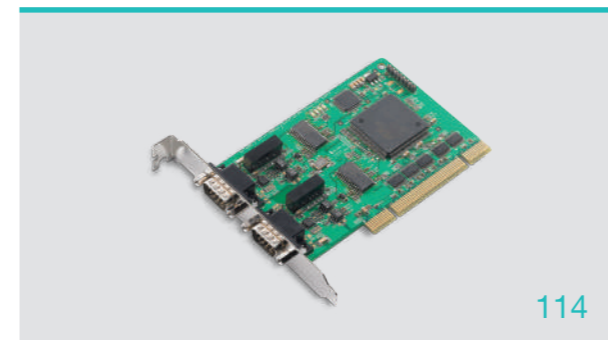


114

CAN Interface Boards/Modules

Moxa's CANbus serial boards are the culmination of over 30 years of experience in fieldbus interface boards. These serial boards are rugged, high-quality CAN interface modules that come with features such as ESD surge protection and long-term driver support.

PCI Express (PCIe) Serial Boards

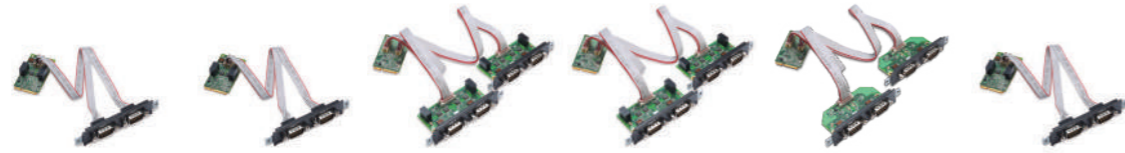

Product Series	CP-102N	CP-132N	CP-104N	CP-134N	CP-114N	CP-112N
Serial Interface						
Comm. Controller	16C550C compatible					
Bus	Mini PCI Express					
Connector	DB9 male					
FIFO	128 bytes					
No. of Ports	2		4			2
Serial Standards	RS-232	RS-422, RS-485	RS-232	RS-422, RS-485	RS-232, RS-422, RS-485 (software-selectable)	
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)					
Stop Bits	1, 1.5, 2					
Parity	None, Even, Odd, Space, Mark					
Flow Control	None, RTS/CTS, XON/XOFF	None, XON/XOFF	None, RTS/CTS, X ON/XOFF	None, XON/XOFF	None, RTS/CTS, XON/XOFF	
Isolation	I models: 2.5 kV		2.5 kV		-	
Data Bits	-		5, 6, 7, 8			-
Serial Software Features						
Windows Drivers	Windows 11/10/8.1/8/7, Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2					
Linux Drivers	Linux kernel 6.x, 5.x, 4.x					
Physical Characteristics						
Dimensions	30 x 50.95 mm (1.18 x 2 in)					
Environmental Limits						
Operating Temperature	-40 to 85°C (-40 to 185°F)					
Storage Temperature (Package Included)	-20 to 85°C (-4 to 185°F)					
Ambient Relative Humidity	5 to 95% (non-condensing)					
Standards and Certifications						
EMC	EN 55032/35					
EMI	CISPR 32, FCC Part 15B Class A					
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV, Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF					
Declaration						
Green Product	RoHS, CRoHS, WEEE					
MTBF						
Time	CP-102N-I-T models: 3,512,504 hrs CP-102N-T models: 4,715,178 hrs	CP-132N-I-T models: 3,583,931 hrs CP-132N-T models: 4,128,967 hrs	CP-104N-I-T models: 2,189,472 hrs CP-104N-T models: 3,673,087 hrs	2,412,169 hrs	3,077,789 hrs	3,524,230 hrs
Package Contents						
Device	1 x CP-102N Series serial board	1 x CP-132N Series serial board	1 x CP-104N Series serial board	1 x CP-134N Series serial board	1 x CP-114N Series serial board	1 x CP-112N Series serial board
Cable	2 x 10-pin female to 1 DB9 male serial cables, 25 cm		2 x 20-pin female to 20-pin female serial cables, 25 cm			2 x 10-pin female to 1 DB9 male serial cables, 25 cm
Installation Kit	Door/CP-100N Port12		Door/CP-100N Port12, Door/CP-100N Port34			Door/CP-100N Port12

PCI Express (PCIe) Serial Boards




Product Series	CP-102E	CP-102EL-DB9M	CP-104EL-A	CP-114EL	CP-116E-A
Serial Interface					
Comm. Controller	16C550C compatible				
Bus	PCI Express 1.0				
Connector	2 x DB9 male	DB25 female	DB44 female	VHDCI 68	
FIFO	128 bytes				
No. of Ports	2		4		16
Serial Standards	RS-232		RS-232, RS-422, RS-485		
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)				
Stop Bits	1, 1.5, 2				
Parity	None, Even, Odd, Space, Mark				
Flow Control	None, RTS/CTS, XON/XOFF				
Data Bits	-	-	5, 6, 7, 8		
Isolation	-	-	-	CP-114EL-I models: 2 kV	-
Surge	-	-	-	-	4 kV
Serial Software Features					
Windows Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95, Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003, Windows 2000/NT, Windows Embedded CE 6.0/5.0, Windows XP Embedded				
Linux Drivers	Linux kernel 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x				
UNIX Drivers	QNX 6, Solaris 10, UnixWare 7, SCO OpenServer 5, SCO OpenServer 6				Solaris 10, UnixWare 7, SCO OpenServer 5, SCO OpenServer 6
Arm®-based Platform Support	Linux kernel 6.x, 5.x				
Environmental Limits					
Operating Temperature	0 to 55°C (32 to 131°F)				
Storage Temperature (Package Included)	-20 to 85°C (-4 to 185°F)				
Ambient Relative Humidity	5 to 95% (non-condensing)				
Standards and Certifications					
EMC	EN 55032/35				
EMI	CISPR 32, FCC Part 15B Class A	CISPR 32, FCC Part 15B Class B			
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF				IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF
MTBF					
Time	4,947,552 hrs		3,601,447 hrs		CP-114EL models: 2,347,197 hrs CP-114EL-I models: 603,671 hrs

PCI Express (PCIe) Serial Boards



Product Series	CP-118E-A-I w/o cable	CP-138E-A-I w/o cable	CP-132EL	CP-134EL-A-I	CP-168EL-A
Serial Interface					
Comm. Controller	16C550C compatible				
Bus	PCI Express 1.0				
Connector	DB78 female	DB25 female	DB44 female	VHDCI 68	
FIFO	128 bytes				
No. of Ports	8	2	4	8	
Serial Standards	RS-232, RS-422, RS-485	RS-422, RS-485			RS-232
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)				
Data Bits	5, 6, 7, 8				
Stop Bits	1, 1.5, 2				
Parity	None, Even, Odd, Space, Mark				
Flow Control	None, RTS/CTS, XON/XOFF	None, XON/XOFF			None, RTS/CTS, XON/XOFF
Isolation	2 kV	CP-132EL-I-DB9M models: 2 kV	2 kV	-	
Surge	4 kV	-	4 kV	-	
Serial Software Features					
Windows Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95, Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003, Windows 2000/NT, Windows Embedded CE 6.0/5.0, Windows XP Embedded				
Linux Drivers	Linux kernel 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x				
UNIX Drivers	Solaris 10, UnixWare 7, SCO OpenServer 5, SCO OpenServer 6	Solaris 10, UnixWare 7, SCO OpenServer 5, SCO OpenServer 6	Solaris 10, UnixWare 7, SCO OpenServer 5, SCO OpenServer 6		
Arm®-based Platform Support	Linux kernel 6.x, 5.x				
Physical Characteristics					
Dimensions	107 x 136.9 mm (4.21 x 5.39 in)	CP-132EL-DB9M models: 67.21 x 101.97 mm (2.65 x 4.08 in) CP-132EL-I-DB9M models: 67.21 x 103.97 mm (2.65 x 4.16 in)	67.21 x 103 mm (2.65 x 4.06 in)	64.42 x 102 mm (2.54 x 4.02 in)	
Environmental Limits					
Operating Temperature	0 to 55°C (32 to 131°F)				
Storage Temperature (Package Included)	-20 to 85°C (-4 to 185°F)				
Ambient Relative Humidity	5 to 95% (non-condensing)				
Standards and Certifications					
EMC	EN 55032/35				
EMI	CISPR 32, FCC Part 15B Class B				
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF
MTBF					
Time	CP-118E-A-I models: 390,883 hrs CP-138E-A-I models: 221,331 hrs	CP-132EL-DB9M models: 4,147,133 hrs CP-132EL-I-DB9M models: 1,681,099 hrs	433,077 hrs	2,351,336 hrs	

Universal PCI Serial Boards

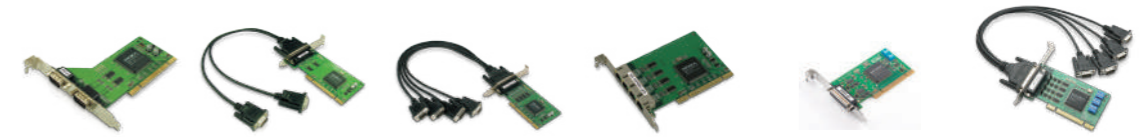

Product Series	CP-102U	CP-102UL-DB9M	CP-104UL-DB9M	CP-104JU	CP-112UL	CP-114UL
Serial Interface						
Comm. Controller	MU860 (16C550C compatible)					
Bus	32-bit Universal PCI					
Connector	2 x DB9 male	DB25 female	DB44 female	4 x RJ45	DB25 female	DB44 female
No. of Ports	2	2	4	4	2	4
Serial Standards	RS-232			RS-232, RS-422, RS-485		
Baudrate	50 bps to 921.6 kbps					
Data Bits	5, 6, 7, 8					
Stop Bits	1, 1.5, 2				-	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark					
Flow Control	None, RTS/CTS, XON/XOFF					
Isolation	-				CP-112UL-I models: 2 kV	CP-114UL-I models: 2 kV
Serial Software Features						
Windows Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95, Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003, Windows 2000/NT, Windows Embedded CE 6.0/5.0, Windows XP Embedded					
Linux Drivers	Linux kernel 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x					
UNIX Drivers	QNX 6, SCO OpenServer, UnixWare 7, Solaris 10, FreeBSD					
Arm®-based Platform Support	Linux kernel 6.x, 5.x					
Physical Characteristics						
Dimensions	80 x 120 mm (3.15 x 4.72 in)	64.5 x 120 mm (2.53 x 4.72 in)	64.4 x 120 mm (2.53 x 4.72 in)	83 x 120 mm (3.27 x 4.72 in)	64.4 x 120 mm (2.53 x 4.72 in)	CP-114UL models: 64.4 x 120 mm (2.53 x 4.72 in) CP-114UL-I models: 64.4 x 130 mm (2.53 x 5.12 in)
Environmental Limits						
Operating Temperature	0 to 55°C (32 to 131°F)				Standard models: 0 to 55°C (32 to 131°F) Wide temp. models: -40 to 85°C (-40 to 185°F)	
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)					
Ambient Relative Humidity	5 to 95% (non-condensing)					
Standards and Certifications						
EMC	EN 55032/35					
EMI	CISPR 32, FCC Part 15B Class B					
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF	All models: IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 4 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF
MTBF						
Time	574,050 hrs	576,401 hrs	558,961 hrs	571,627 hrs	219,971 hrs	114,223 hrs

Universal PCI Serial Boards



Product Series	CP-118U	CP-138U	CP-132UL	CP-134U	CP-168U	POS-104UL
Serial Interface						
Comm. Controller	MU860 (16C550C compatible)					16C550C compatible
Bus	32-bit Universal PCI					
Connector	DB62 female		DB25 female	DB44 female	DB62 female	DB44 female
No. of Ports	8		2	4	8	4
Serial Standards	RS-232, RS-422, RS-485		RS-422, RS-485		2 x RS-232/422/485 2 x RS-422/485	
Baudrate	50 bps to 921.6 kbps					
Data Bits	5, 6, 7, 8					
Stop Bits	1, 1.5, 2					
Parity	None, Even, Odd, Space, Mark					
Flow Control	None, RTS/CTS, XON/XOFF		None, XON/XOFF		None, RTS/CTS, XON/XOFF	
Isolation	-		CP-132UL-I models: 2 kV	CP-134U-I models: 2 kV	-	
Serial Software Features						
Windows Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95, Windows Server 2025/2022/2019/2016/2012 R2/2012/2008 R2/2008/2003, Windows Embedded CE 6.0/5.0, Windows XP Embedded				Windows 10/8.1/8/7/Vista/XP/ME/98/95, Windows Server 2012 R2/2012/2008 R2/2008/2003, Windows 2000/NT, Windows Embedded CE 6.0/5.0	
Linux Drivers	Linux kernel 6.x, 5.x, 4.x, 3.x, 2.6.x, 2.4.x					
UNIX Drivers	QNX 6, SCO OpenServer, UnixWare 7, Solaris 10, FreeBSD				Solaris 10, UnixWare 7, SCO OpenServer 5, SCO OpenServer 6	
Arm®-based Platform Support	Linux kernel 6.x, 5.x					
Physical Characteristics						
Dimensions	82 x 135 mm (3.22 x 5.31 in)		64.4 x 120 mm (2.53 x 4.72 in)	CP-134U models: 82.5 x 120 mm (3.24 x 4.72 in) CP-134U-I models: 115 x 120 mm (4.52 x 4.72 in)	82 x 120 mm (3.22 x 4.72 in)	64.4 x 120 mm (2.53 x 4.72 in)
Environmental Limits						
Operating Temperature	0 to 55°C (32 to 131°F)		Standard models: 0 to 55°C (32 to 131°F) Wide temp. models: -40 to 85°C (-40 to 185°F)			
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)					
Ambient Relative Humidity	5 to 95% (non-condensing)					
Standards and Certifications						
EMC	EN 55032/35					EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class B					EN 61000-6-4, FCC Part 15B Class B
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m		IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV		IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11	
MTBF						
Time	1,073,385 hrs	1,147,210 hrs	1,647,832 hrs	480,209 hrs	280,854 hrs	2,124,022 hrs

CAN Interface Boards/Modules



Product Series	CP-602U-I	CP-602E-I	CB-602I
CAN Interface			
Baudrate	10/20/50/125/250/500/800/1000 kbps, User-defined		
Connector	DB9 male		20-pin box header
No. of Ports	2		
Serial Interface			
Isolation	2 kV		
Serial Software Features			
Windows Drivers	Windows 11/10/7 Windows Server 2025/2022/2019/2016		
Linux Drivers	Kernel versions: 6.x, 5.x, 4.x		
Library	C/C++, Visual Basic		
Environmental Limits			
Operating Temperature	CP-602U-I models w/o cable: 0 to 55°C (32 to 131°F) CP-602U-I-T models w/o cable: -40 to 85°C (-40 to 185°F)	Standard models: 0 to 55°C (32 to 131°F) Wide temp. models: -40 to 85°C (-40 to 185°F)	
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)		
Ambient Relative Humidity	5 to 95% (non-condensing)		
Standards and Certifications			
EMC	EN 55032/35		
EMI	CISPR 32, FCC Part 15B Class B		
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11
MTBF			
Time	1,989,990 hrs	4,645,502 hrs	248,563 hrs

Controllers & I/Os

Moxa provides a wide range of controllers and I/O products for industrial automation applications. Our devices are built with push technology to facilitate faster I/O response times while still ensuring accurate data collection. Moxa's Click&Go Plus simplifies configuration of control logic rules and provides support for multiple OT/IT protocols, making it easier for you to realize your IIoT application. Our products have been successfully deployed in factories, energy and transportation applications, and city infrastructure.



Controllers and I/Os
Product Pages



117

Universal Controllers & I/Os

Our universal controllers and I/O products use Click&Go control logic, and include our active monitoring technology and support for a versatile set of OT/IT protocols to help you easily configure, deploy, and realize IIoT applications such as energy monitoring, facility monitoring, and machine OEM applications.



121

Advanced Controllers & I/Os

Moxa's advanced controllers and I/O products make it easier to realize complex IIoT applications, such as energy management, factory machine management, transportation management, and remote asset management, through expandable communication and high-performance data acquisition and control capabilities.



125

Rugged Controllers & I/Os

Rail, wind power, and offshore applications demand system reliability and stability, especially in harsh environments. Our rugged controllers and I/O products are designed to perform in extreme conditions while providing versatile data acquisition and control capabilities.



129

Intelligent Integrated Node

Intelligent Integrated Node (IIN) is an advanced RTU designed for industrial applications in harsh environments. IIN delivers industrial-grade reliability and flexibility with support for multiple IT/OT protocols, enabling seamless integration with SCADA, plant monitoring, and cloud systems. IIN provides the flexibility to build an RTU based on your application needs with expansion capability to ramp up the I/O capacity as needed, making it easy to deploy and maintain.

Universal Controllers & I/Os



	ioLogik 2512(-T)	ioLogik 2542(-T)
Control Logic		
Language	Click&Go Plus	
Input/Output Interface		
Digital Input Channels	8	–
Configurable DIO Channels (by Software)	8	12
Analog Input Channels	–	4
Ethernet Interface		
10/100BaseT(X) Ports (RJ45 Connector)	4, Switched	
Ethernet Software Features		
Industrial Protocols	CGI commands, Modbus TCP Client, Modbus TCP Server, Moxa AOPC (Active Tag), MXIO Library, RESTful API, SNMPv1/v2c/v3, SNMPv1/v2c Trap	
Serial Interface		
Baudrate	300, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200 bps	
No. of Ports	2	
Serial Standards	RS-232, RS-422, RS-485-2w, RS-485-4w	
Serial Software Features		
Industrial Protocols	Modbus RTU Client	
Environmental Limits		
Operating Temperature	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)	
Ambient Relative Humidity	5 to 95% (non-condensing)	
Altitude	Up to 2000 m ¹	
Standards and Certifications		
EMC	EN 61000-6-2/-6-4	
EMI	CISPR 32, FCC Part 15B Class A	
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF	
Vibration	IEC 60068-2-6	
Shock	IEC 60068-2-27	
Freefall	IEC 60068-2-32	
Hazardous Locations	ATEX, CID2	
Safety	UL 508	
Declaration		
Green Product	RoHS, CRoHS, WEEE	

¹ Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

Universal Controllers & I/Os



	ioLogik E2210(-T)	ioLogik E2212(-T)	ioLogik E2214(-T)	ioLogik E2240(-T)	ioLogik E2242(-T)	ioLogik E2260(-T)	ioLogik E2262(-T)
Control Logic							
Language	Click&Go						
Input/Output Interface							
Digital Input Channels	12	8	6	–	–	–	–
Digital Output Channels	8	8	–	–	–	4	4
Configurable DIO Channels (by Software)	–	4	–	–	12	–	–
Relay Channels	–	–	6	–	–	–	–
Analog Input Channels	–	–	–	8	4	–	–
Analog Output Channels	–	–	–	2	–	–	–
RTD Channels	–	–	–	–	–	6	–
Thermocouple Channels	–	–	–	–	–	–	8
Ethernet Software Features							
Industrial Protocols	Modbus TCP Server, SNMPv1/v2c/v3, SNMPv1 Trap, Moxa AOPC (Active Tag), MXIO Library, CGI commands						
Environmental Limits							
Operating Temperature	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)						
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)						
Ambient Relative Humidity	5 to 95% (non-condensing)						
Altitude	Up to 2000 m ¹						
Standards and Certifications							
Safety	UL 508						
EMC	EN 61000-6-2/-6-4						
EMI	CISPR 32, FCC Part 15B Class A						
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF						
Shock	IEC 60068-2-27						
Vibration	IEC 60068-2-6						
Freefall	IEC 60068-2-32						
Declaration							
Green Product	RoHS, CRoHS, WEEE						

¹ Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

Universal Controllers & I/Os



	ioLogik E1210(-T)	ioLogik E1211(-T)	ioLogik E1212(-T)	ioLogik E1213(-T)	ioLogik E1214(-T)	ioLogik E1240(-T)	ioLogik E1241(-T)	ioLogik E1242(-T)	ioLogik E1260(-T)	ioLogik E1262(-T)
Input/Output Interface										
Digital Input Channels	16	–	8	8	6	–	–	4	–	–
Digital Output Channels	–	16	–	4	–	–	–	–	–	–
Configurable DIO Channels (by Jumper)	–	–	8	4	–	–	–	4	–	–
Relay Channels	–	–	–	–	6	–	–	–	–	–
Analog Input Channels	–	–	–	–	–	8	–	4	–	–
Analog Output Channels	–	–	–	–	–	–	4	–	–	–
RTD Channels	–	–	–	–	–	–	–	–	6	–
Thermocouple Channels	–	–	–	–	–	–	–	–	–	8
Digital Outputs										
I/O Type	–	Sink		Source		–	–	Sink	–	–
Current Rating	–	200 mA per channel		500 mA per channel		–	–	200 mA per channel	–	–
Ethernet Interface										
10/100BaseT(X) Ports (RJ45 Connector)	2, Switched									
Ethernet Software Features										
Industrial Protocols	Modbus TCP Server, Moxa AOPC (Active Tag), MXIO Library, EtherNet/IP Adapter									
Management	RESTful API, SNMPv1/v2c, SNMPv1 Trap, HTTP, DHCP Client, BOOTP, IPv4, TCP/IP, UDP									
Modbus TCP										
Max. No. of Client Connections	10									
EtherNet/IP										
Max. No. of Scanner Connections	9 (for read-only), 1 (for read/write)									
Environmental Limits										
Operating Temperature	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)									
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)									
Ambient Relative Humidity	5 to 95% (non-condensing)									
Altitude	Up to 4000 m ¹									
Standards and Certifications										
EMC	EN 55032/24, EN 61000-6-2/-6-4									
EMI	CISPR 32, FCC Part 15B Class A									
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF									
Hazardous Locations	ATEX, CID2		–		ATEX, CID2					
Safety	UL 508									
Shock	IEC 60068-2-27									
Freefall	IEC 60068-2-32									
Vibration	IEC 60068-2-6									
Declaration										
Green Product	RoHS, CRoHS, WEEE									

¹ Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

Universal Controllers & I/Os



	ioLogik R1210(-T)	ioLogik R1212(-T)	ioLogik R1214(-T)	ioLogik R1240(-T)	ioLogik R1241(-T)
Input/Output Interface					
Analog Input Channels	–	–	–	8	–
Analog Output Channels	–	–	–	–	4
Configurable DIO Channels (by Software)	–	8	–	–	–
Digital Input Channels	16	8	6	–	–
Relay Channels	–	–	6	–	–
Digital Outputs					
I/O Type	–	Sink		–	
Serial Interface					
Baudrate	1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200, 921600 bps				
No. of Ports	2				
Surge	1 kV				
ESD	15 kV				
Serial Signals					
RS-485-2w	Data+, Data-, GND				
Serial Software Features					
Industrial Protocols	Modbus RTU Server				
Environmental Limits					
Operating Temperature	Standard models: -10 to 75°C (14 to 167°F) Wide temp. models: -40 to 85°C (-40 to 185°F)				
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)				
Ambient Relative Humidity	5 to 95% (non-condensing)				
Altitude	Up to 2000 m ¹				
Standards and Certifications					
EMC	EN 55032/24				
EMI	CISPR 32, FCC Part 15B Class A				
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF				
Safety	UL 508				
Shock	IEC 60068-2-27				
Vibration	IEC 60068-2-6				
Declaration					
Green Product	RoHS, CRoHS, WEEE				

¹ Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

Advanced Controllers & I/Os



Product Series	ioThinX 4533-LX(-T)
Computer	
CPU	Armv7 Cortex-A7 dual-core 1 GHz
OS	Moxa Industrial Linux 3
Clock	Real-time clock with capacitor backup
DRAM	2 GB DDR3
MRAM	128 kB
Storage Preinstalled	8 GB eMMC (6 GB reserved for the user)
Storage Slot	1 x microSD slot (32 GB max.)
Expansion Slots	Up to 64 (with 45MR I/O modules) Up to 5 (with 45ML communication modules)
Control Logic	
Language	C/C++, Python
Ethernet Interface	
10/100BaseT(X) Ports (RJ45 Connector)	2, 2 MAC addresses
Magnetic Isolation Protection	1.5 kV (built-in)
Serial Interface	
No. of Ports	1 x RS-232/422 or 2 x RS-485-2w
System Power Parameters	
No. of Power Inputs	1
Input Voltage	12 to 48 VDC
Field Power Parameters	
No. of Power Inputs	1
Input Voltage	12/24 VDC
Physical Characteristics	
Housing	Plastic
Dimensions	60.3 x 99 x 75 mm (2.37 x 3.9 x 2.96 in)
Installation	DIN-rail mounting
Standards and Certifications	
EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF
Safety	UL 61010-2-201
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Hazardous Locations	CID2, ATEX
Environmental Limits	
Operating Temperature	Standard models: -20 to 60°C (-4 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	Up to 4000 m ¹
Declaration	
Green Product	RoHS, CRoHS, WEEE
Warranty	
Warranty Period	5 years

¹ Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

Advanced Controllers & I/Os



Product Series	45ML-5401(-T)
Input/Output Interface	
Isolation	3k VDC or 2k Vrms
Serial Interface	
No. of Ports	4
Serial Standards	RS-232, RS-422, RS-485-2w
Physical Characteristics	
Housing	Plastic
Dimensions	26.4 x 99 x 65.5 mm (1.04 x 3.9 x 2.58 in)
Environmental Limits	
Operating Temperature	Standard models: -20 to 60°C (-4 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	Up to 2000 m ¹
Standards and Certifications	
EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF
Safety	UL 61010-2-201
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Hazardous Locations	CID2, ATEX
Declaration	
Green Product	RoHS, CRoHS, WEEE
Warranty	
Warranty Period	5 years

¹ Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

Advanced Controllers & I/Os



Product Series	ioThinX 4510(-T)
Input/Output Interface	
Expansion Slots	Up to 32 ^{1,2}
Ethernet Interface	
10/100BaseT(X) Ports (RJ45 Connector)	2, 1 MAC address (Ethernet bypass)
Ethernet Software Features	
Configuration Options	Web Console (HTTP/HTTPS), Windows Utility (IOxpress), MCC Tool
Industrial Protocols	Modbus TCP Server, RESTful API, SNMPv1/v2c/v3, SNMPv1/v2c/v3 Trap, SNMPv2c/v3 Inform, MQTT
Management	SNMPv1/v2c/v3, SNMPv1/v2c/v3 Trap, SNMPv2c/v3 Inform, DHCP Client, IPv4, HTTP, UDP, TCP/IP
Security Functions	
Authentication	Local database
Encryption	HTTPS, AES-128, AES-256, HMAC, RSA-1024, SHA-1, SHA-256, ECC-256
Security Protocols	SNMPv3, HTTPS (TLS 1.2), SNMPv3 Trap
Serial Interface	
No. of Ports	1 x RS-232/422 or 2 x RS-485 (2 wires)
Serial Software Features	
Industrial Protocols	Modbus RTU Client
System Power Parameters	
No. of Power Inputs	1
Input Voltage	12 to 48 VDC
Field Power Parameters	
No. of Power Inputs	1
Input Voltage	12/24 VDC
Physical Characteristics	
Housing	Plastic
Dimensions	42.3 x 99 x 75 mm (1.67 x 3.9 x 2.95 in)
Environmental Limits	
Operating Temperature	Standard models: -20 to 60°C (-4 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	Up to 4000 m ³
Standards and Certifications	
EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF
Safety	UL 61010-2-201
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Hazardous Locations	CID2, ATEX
Declaration	
Green Product	RoHS, CRoHS, WEEE
Warranty	
Warranty Period	5 years

¹ Compatible only with the ioThinX 4500 Series (45MR) Modules.

² Up to 8 slots only when web service via HTTPS and other services are enabled in firmware v1.4 and higher. For more details, refer to the product manual.

³ Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

Advanced Controllers & I/Os



	45MR-1600(-T)	45MR-1601(-T)	45MR-2404(-T)	45MR-2600(-T)	45MR-2601(-T)	45MR-2606(-T)	45MR-3800(-T)	45MR-3810(-T)	45MR-4420(-T)	45MR-6600(-T)	45MR-6810(-T)	45MR-7210(-T)	45MR-7820(-T)	
Input/Output Interface														
Digital Input Channels	16	16	-	-	-	8	-	-	-	-	-	-	-	
Digital Output Channels	-	-	-	16	16	8	-	-	-	-	-	-	-	
Analog Input Channels	-	-	-	-	-	-	8	8	-	-	-	-	-	
Analog Output Channels	-	-	-	-	-	-	-	-	4	-	-	-	-	
Relay Channels	-	-	4	-	-	-	-	-	-	-	-	-	-	
RTD Channels	-	-	-	-	-	-	-	-	-	6	-	-	-	
Thermocouple Channels	-	-	-	-	-	-	-	-	-	-	8	-	-	
Field Potential Output Channels	-	-	-	-	-	-	-	-	-	-	-	-	8	
System Power Input Channels	-	-	-	-	-	-	-	-	-	-	-	1	-	
Field Power Input Channels	-	-	-	-	-	-	-	-	-	-	-	1	-	
Digital Inputs														
Sensor Type	Dry / Wet contact (PNP)	Dry / Wet contact (NPN)	-	-	-	-	-	-	-	-	-	-	-	
Digital Outputs														
I/O Type	-	-	Sink	Source	Source	-	-	-	-	-	-	-	-	
Relays														
Type	-	-	Form A (N.O.) power relay	-	-	-	-	-	-	-	-	-	-	
Analog Inputs														
Input Range	-	-	-	-	-	-	-	-	0 to 20 mA 4 to 20 mA (w/ w/o burn-out detection)	0 to 10 VDC ±10 VDC	-	-	-	
Analog Outputs														
Output Range	-	-	-	-	-	-	-	-	-	0 to 10 VDC 0 to 20 mA 4 to 20 mA	-	-	-	
RTDs														
Sensor Type	-	-	-	-	-	-	-	-	-	-	PT50, PT100, PT200, PT500, PT1000, JPT100, JPT200, JPT500, JPT1000, NI100, NI200, NI500, NI1000, NI120	-	-	-
Resistance Type	-	-	-	-	-	-	-	-	-	-	310, 620, 1250, 2200 ohms	-	-	
Thermocouples														
Sensor Type	-	-	-	-	-	-	-	-	-	-	J, K, T, E, R, S, B, N	-	-	
System Power Parameters														
Input Voltage	-	-	-	-	-	-	-	-	-	-	-	12 to 48 VDC	-	
Field Power Parameters														
Input Voltage	-	-	-	-	-	-	-	-	-	-	-	12/24 VDC	-	
Output Voltage	-	-	-	-	-	-	-	-	-	-	-	-	0, 12/24 VDC	
Environmental Limits														
Operating Temperature	Standard models: -20 to 60°C (-4 to 140°F), Wide temp. models: -40 to 75°C (-40 to 167°F)													
Warranty														
Warranty Period	5 years			2 years				5 years						

For detailed information about **Standards and Certifications**, **Environmental Limits**, and **Declarations**, please refer to the product page on www.moxa.com.

Rugged Controllers & I/Os



Product Series	ioPAC 8600
Computer	
CPU	32-bit Cortex-A8 1 GHz CPU
OS	Real-time Linux (PREEMPT_RT)
Clock	Real-time clock with capacitor backup
Memory	
eMMC	4 GB (1.7 GB reserved for user) for HW Rev. 1.0.1 8 GB (5.2 GB reserved for user) for HW Rev. 1.1.0
SDRAM	512 MB DDR3(L)
microSD Slot	Up to 32 GB (SD 2.0 compatible) ¹
Control Logic	
Language	C/C++, IEC 61131-3
Ethernet Interface	
10/100BaseT(X) Ports (M12 D-coded 4-pin Female Connector)	M12 version: 2, 1 MAC address (Ethernet bypass) or 2 MAC addresses, Jumper-selectable
10/100BaseT(X) Ports (RJ45 Connector)	RJ45 version: 2, 1 MAC address (Ethernet bypass) or 2 MAC addresses, Jumper-selectable
Magnetic Isolation Protection	1.5 kV (built-in)
Power Parameters	
No. of Power Inputs	2
Input Voltage	24 to 110 VDC
Power Consumption	223 mA @ 24 VDC
Galvanic Isolation	3k VDC
Physical Characteristics	
Slots	ioPAC 8600-BM005 models: 5 ioPAC 8600-BM009 models: 9 ioPAC 8600-BM012 models: 12
Environmental Limits	
Operating Temperature	-40 to 75°C (-40 to 167°F)
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	Up to 2000 m ²

¹ For units operating in extreme temperatures, industrial-grade, wide-temperature microSD cards are required.
² Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

Rugged Controllers & I/Os



	86M-1620D-T	86M-1832D-T	86M-2821D-T	86M-2830D-T	86M-2604D-T	86M-4420-T	86M-5212U-T	86M-5250-T
Input/Output Interface								
Digital Input Channels	16	8	-	-	-	-	-	-
Digital Output Channels	-	-	8	8	-	-	-	-
Relay Channels	-	-	-	-	6	-	-	-
Analog Output Channels	-	-	-	-	-	4	-	-
2-wire Ethernet Ports	-	-	-	-	-	-	2	-
CAN Ports	-	-	-	-	-	-	-	2
Isolation	3k VDC or 2k Vrms							
Digital Inputs								
Voltage	24 to 110 VDC	24 VDC	-	-	-	-	-	-
Channel-to-channel Isolation	-	1k VDC	-	-	-	-	-	-
I/O Mode	DI	DI, event counter, or frequency	-	-	-	-	-	-
Wet Contact (DI to COM)	On: > 0.3 times external power voltage Off: < 0.15 times external power voltage	On: 10 to 30 VDC Off: 0 to 3 VDC	-	-	-	-	-	-
Digital Outputs								
Voltage	-	-	24 to 110 VDC	24 VDC	-	-	-	-
Current Rating	-	-	1500 mA per channel	200 mA per channel	-	-	-	-
I/O Mode	-	-	DO or PWM	DO or PWM	-	-	-	-
I/O Type	-	-	Source	Sink	-	-	-	-
Relays								
I/O Mode	-	-	-	-	Relay or PWM	-	-	-
Contact Current Rating	-	-	-	-	Resistive load: 5 A @ 30 VDC, 250 VAC	-	-	-
Type	-	-	-	-	Form A (N.O.) power relay	-	-	-
Analog Outputs								
I/O Mode	-	-	-	-	-	Static or waveform mode	-	-
Accuracy	-	-	-	-	-	±0.1% FSR @ 25°C ±0.3% FSR @ -40 to 75°C	-	-
Output Range	-	-	-	-	-	0 to 10 VDC 0 to 20 mA -10 to 10 V 4 to 20 mA	-	-
Resolution	-	-	-	-	-	12-bit	-	-
Ethernet Interface								
Connector	-	-	-	-	-	-	M12 D-coded 2-pin female connector	-
No. of Ports	-	-	-	-	-	-	2	-
Standards	-	-	-	-	-	-	BroadR-Reach® for 10 Mbps and 100 Mbps IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX	-
CAN Interface								
Industrial Protocols	-	-	-	-	-	-	-	CAN 2.0A CAN 2.0B CANopen DS301, V4.02
Connector	-	-	-	-	-	-	-	DB9 male
Terminator	-	-	-	-	-	-	-	N/A, 120 ohms (by DIP)

Rugged Controllers & I/Os



	85M-1602-T	85M-2600-T	85M-3800-T	85M-3801-T	85M-3810-T	85M-3811-T	85M-6600-T	85M-6810-T	85M-5401-T	
Input/Output Interface										
Analog Input Channels	-	-	8	8	8	8	-	-	-	
Digital Input Channels	16	-	-	-	-	-	-	-	-	
Digital Output Channels	-	16	-	-	-	-	-	-	-	
RTD Channels	-	-	-	-	-	-	6	-	-	
Thermocouple Channels	-	-	-	-	-	-	-	8	-	
Serial Ports	-	-	-	-	-	-	-	-	4	
Isolation	3k VDC or 2k Vrms									
Digital Inputs										
Voltage	24 VDC	-	-	-	-	-	-	-	-	
I/O Mode	DI, event counter, or frequency	-	-	-	-	-	-	-	-	
Points per COM	8 channels	-	-	-	-	-	-	-	-	
Sensor Type	Dry contact NPN or PNP	-	-	-	-	-	-	-	-	
Digital Outputs										
Voltage	-	24 VDC	-	-	-	-	-	-	-	
I/O Type	-	Sink	-	-	-	-	-	-	-	
Current Rating	-	200 mA per channel	-	-	-	-	-	-	-	
I/O Mode	-	DO or PWM	-	-	-	-	-	-	-	
Analog Inputs										
Input Range	-	-	4 to 20 mA (with burn-out detection)			0 to 10 VDC		-	-	-
I/O Type	-	-	Differential				-	-	-	
Resolution	-	-	16 bits				-	-	-	
Sampling Rate	-	-	All channels: 100 Hz	All channels: 40 kHz	All channels: 100 Hz	All channels: 40 kHz	-	-	-	
RTDs										
Input Connection	-	-	-	-	-	-	2- or 3-wire	-	-	
Input Impedance	-	-	-	-	-	-	625 kilo-ohms (min.)	-	-	
Sensor Type	-	-	-	-	-	-	JPT100, JPT200, JPT500, JPT1000, NI100, NI50, NI500, NI1000, NI120, PT1000, PT50, PT100, PT200, PT500, Resistance of 310, 620, 1250, and 2200 ohms	-	-	
Resolution	-	-	-	-	-	-	0.1°C or 0.1 ohms	-	-	
Sampling Rate	-	-	-	-	-	-	All channels: 12 Hz	-	-	
Thermocouples										
Input Impedance	-	-	-	-	-	-	-	1 mega-ohm (min.)	-	
Millivolt Type	-	-	-	-	-	-	-	±19.532 mV ±39.062 mV Fault and over-voltage protection: -35 to +35 VDC (power off); -25 to +30 VDC (power on)	-	
Resolution	-	-	-	-	-	-	-	16 bits	-	
Sampling Rate	-	-	-	-	-	-	-	All channels: 12 Hz	-	
Sensor Type	-	-	-	-	-	-	-	J, K, T, E, R, S, B, N	-	
Serial Interface										
Baudrate	-	-	-	-	-	-	-	-	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200, 921600 bps	

Rugged Controllers & I/Os



Product Series	ioLogik E1510-M12-T	ioLogik E1512-M12-T
Input/Output Interface		
Digital Input Channels	12	4
Configurable DIO Channels (by Software)	-	4
Digital Outputs		
I/O Type	-	Sink
Current Rating	-	200 mA per channel
Ethernet Interface		
10/100BaseT(X) Ports (M12 D-coded 4-pin Female Connector)	1	
Ethernet Software Features		
Industrial Protocols	Modbus TCP Server, Moxa AOPC (Active Tag), MXIO Library	
Environmental Limits		
Operating Temperature	-40 to 85°C (-40 to 185°F)	
Storage Temperature	-40 to 85°C (-40 to 185°F)	
Ambient Relative Humidity	5 to 95% (non-condensing)	
Altitude	Up to 2000 m ¹	
Standards and Certifications		
EMC	EN 61000-6-2/-6-4	
EMI	CISPR 32, FCC Part 15B Class A	
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF	
Railway	EN 50121-4, EN 50155	
Safety	UL 508	
Shock	IEC 60068-2-27	
Vibration	IEC 60068-2-6	
Declaration		
Green Product	RoHS, CRoHS, WEEE	

¹ Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

Intelligent Integrated Node



Product Series	65M-CPU14-IEC-CT-T CPU Modules for ioPAC 6500
Controller	
CPU	Arm Cortex-A53 quad-core 1.6 GHz
OS	Moxa Industrial Linux 3 (Debian 11, kernel 5.10)
SDRAM	4 GB
MRAM	512 kB (for logger)
Storage Preinstalled	8 GB eMMC (4 GB reserved for users)
Buttons	Reset button
Control Logic	
Language	IEC 61131-3 programming languages
Ethernet Interface	
10/100/1000BaseT(X) Ports (RJ45 connector)	2
Magnetic Isolation Protection	1.5 kV (built-in)
Serial Interface	
No. of Ports	2
Connector	DB9 male
Serial Standards	RS-232, RS-422, RS-485
Baudrate	300, 1200, 1800, 2400, 4800, 9600, 19200, 28800, 38400, 57600, 115200 bps
Parity	None, Even, Odd
Data Bits	7, 8
Stop Bits	1, 2
Flow Control	RTS/CTS, XON/XOFF
System Power Parameters	
Input Current	0.8 A @ 12 VDC
Physical Characteristics	
Housing	Plastic
Dimensions	42 x 177 x 134.8 mm (1.65 x 6.97 x 5.31 in)
Weight	625 g (1.38 lb)
Environmental Limits	
Operating Temperature	-40 to 75°C (-40 to 167°F) Note: Proper airflow is required in an environment with temperature > 65°C.
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	2000 m
Standards and Certifications	
EMC	EN 55032/35, EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: (DC) 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: (DC) 0.5 kV L-N, 1 kV L/N-PE; Signal: 1 kV; IO: 0.5 kV IEC 61000-4-6 CS: Power: 10 Vrms; Signal: 10 Vrms IEC 61000-4-8 PFMF: 30 A/m
Safety	UL 61010-1, UL 61010-2-201
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Package Vibration Test	ISTA 1A
Package Drop Test	ISTA 1A

Intelligent Integrated Node



Product Series	65M-PW0075-CT-T Power Modules for ioPAC 6500
System Power Parameters	
Power Connector	Screw-fasten type Euroblock terminal
No. of Power Inputs	1
Input Voltage	24 VDC, 21.6 to 26.4 VDC
Input Current	4 A (max.)
Output Voltage	12 VDC
Output Current	6.25 A (max.)
Output Power	75 W (max.)
Efficiency	87%
Isolation	3k VDC (input-to-output), 3k VDC (system-to-field power)
Field Power Parameters	
Power Connector	Screw-fasten type Euroblock terminal
No. of Power Inputs	1
Input Voltage	24 VDC, 21.6 to 26.4 VDC
Input Current	3 A (max.)
Output Voltage	([input voltage] - 0.4) VDC
Output Current	3 A (max.)
Physical Characteristics	
Housing	Plastic
Dimensions	42 x 177 x 149.4 mm (1.65 x 6.97 x 5.88 in)
Weight	713 g (1.57 lb)
Environmental Limits	
Operating Temperature	-40 to 75°C (-40 to 167°F) Note: Proper airflow is required in an environment with temperature > 65°C.
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	2000 m
Standards and Certifications	
EMC	EN 55032/35, EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: (DC) 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: (DC) 0.5 kV L-N, 1 kV L/N-PE; Signal: 1 kV; IO: 0.5 kV IEC 61000-4-6 CS: Power: 10 Vrms; Signal: 10 Vrms IEC 61000-4-8 PFMF: 30 A/m
Safety	UL 61010-1, UL 61010-2-201
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Package Vibration Test	ISTA 1A
Package Drop Test	ISTA 1A

Intelligent Integrated Node



Product Series	65M-5011M-CT-T Communication Modules for ioPAC 6500
Ethernet Interface	
10/100/1000BaseT(X) Ports (RJ45 connector)	8
100/1000BaseSFP Slots	2
Ethernet Software Features	
Management	IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP Port Mirroring, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB, Fiber check
Filter	GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier
Redundancy Protocols	STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual Homing, Link Aggregation
Security	Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, Sticky MAC, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy
Time Management	Sntp, NTP Server/Client, NTP Authentication
Protocols	IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog
Power Parameters	
Input Current	0.9 A @ 12 VDC
Physical Characteristics	
Housing	Plastic
Dimensions	42 x 177 x 131.5 mm (1.65 x 6.97 x 5.18 in)
Weight	660 g (1.46 lb)
Environmental Limits	
Operating Temperature	-40 to 75°C (-40 to 167°F) With SFP module installed: -40 to 65°C (-40 to 149°F) Note: Proper airflow is required in an environment with temperature > 65°C.
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	2000 m
Standards and Certifications	
EMC	EN 55032/35, EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: (DC) 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: (DC) 0.5 kV L-N, 1 kV L/N-PE; Signal: 1 kV; IO: 0.5 kV IEC 61000-4-6 CS: Power: (DC) 10 V IEC 61000-4-8 PFME: 30 A/m
Safety	UL 61010-2-201, UL 61010-1
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Package Vibration Test	ISTA 1A
Package Drop Test	ISTA 1A

Intelligent Integrated Node



Product Series	65M-5290-CT-T Expansion Modules for ioPAC 6500
Expansion Parameters	
Port Interface	2 x RJ45/SFP Combo ports
Power Parameters	
Input Current	0.38 A @ 12 VDC
Physical Characteristics	
Housing	Plastic
Dimensions	42 x 177 x 132.1 mm (1.65 x 6.97 x 5.2 in)
Weight	501 g (1.1 lb)
Environmental Limits	
Operating Temperature	-40 to 75°C (-40 to 167°F) Note: Proper airflow is required in an environment with temperature > 65°C.
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	2000 m
Standards and Certifications	
EMC	EN 55032/35, EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: (DC) 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: (DC) 0.5 kV L-N, 1 kV L/N-PE; Signal: 1 kV; IO: 0.5 kV IEC 61000-4-6 CS: Power: 10 Vrms; Signal: 10 Vrms IEC 61000-4-8 PFME: 30 A/m
Safety	UL 61010-1, UL 61010-2-201
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Package Vibration Test	ISTA 1A
Package Drop Test	ISTA 1A

Intelligent Integrated Node



	65M-1900-CT-T	65M-2901-CT-T	65M-3600-CT-T	65M-3610-CT-T	65M-3800H-CT-T	65M-4820-CT-T	65M-5801-CT-T
I/O Modules for ioPAC 6500							
Input/Output Interface							
Digital Input Channels	32	-	-	-	-	-	-
Digital Output Channels	-	32	-	-	-	-	-
Analog Input Channels	-	-	16 (current)	16 (voltage)	8 (HART)	-	-
Analog Output Channels	-	-	-	-	-	8	-
Serial Ports	-	-	-	-	-	-	8
Digital Inputs							
I/O Type	Sink	-	-	-	-	-	-
I/O Mode	DI or event counter (channel 1 to 8, group configurable by software)	-	-	-	-	-	-
Rated Voltage	24 VDC	-	-	-	-	-	-
Counter Frequency	Square wave: 0 to 10 kHz	-	-	-	-	-	-
Digital Outputs							
I/O Type	-	Source	-	-	-	-	-
I/O Mode	-	DO or pulse output (channel 1 to 8, group configurable by software)	-	-	-	-	-
Rated Voltage	-	24 V	-	-	-	-	-
Pulse Duration	-	500 μs	-	-	-	-	-
Analog Inputs							
I/O Mode	-	-	Current	Voltage	Current	-	-
Input Range	-	-	0 to 20 mA 4 to 20 mA	0 to 10 V 1 to 5 V	4 to 20 mA with HART function	-	-
Converter Resolution	-	-	16-bit	16-bit	16-bit	-	-
Accuracy	-	-	±0.1% FSR @ 25°C ±0.3% FSR @ -40 to 75°C	±0.1% FSR @ 25°C ±0.3% FSR @ -40 to 75°C	±0.1% FSR @ 25°C ±0.3% FSR @ -40 to 75°C	-	-
Conversion Time	-	-	100 ms	100 ms	100 ms	-	-
HART Operation Type	-	-	-	-	Primary Master	-	-
HART Topology	-	-	-	-	Point-to-point	-	-
Analog Outputs							
I/O Mode	-	-	-	-	-	Voltage/Current	-
Output Range	-	-	-	-	-	0 to 10 V 1 to 5 V 0 to 20 mA 4 to 20 mA	-
Converter Resolution	-	-	-	-	-	16-bit	-
Accuracy	-	-	-	-	-	±0.1% FSR @ 25°C ±0.3% FSR @ -40 to 75°C	-
Output Refresh Time	-	-	-	-	-	16 ms	-
Serial Interface							
Serial Standard	-	-	-	-	-	-	RS-232, RS-422, RS-485
Baudrate	-	-	-	-	-	-	300, 1200, 1800, 2400, 4800, 9600, 19200, 28800, 38400, 57600, 115200 bps
Data Bits	-	-	-	-	-	-	7, 8
Stop Bits	-	-	-	-	-	-	1, 2
Parity	-	-	-	-	-	-	None, Even, Odd
Flow Control	-	-	-	-	-	-	RTS/CTS, XON/XOFF
Connector	-	-	-	-	-	-	Terminal block
Power Consumption							
System Power	0.068 A @ 12 VDC 0.019 A @ 24 VDC (without internal field circuit supply)	0.068 A @ 12 VDC	0.073 A @ 12 VDC	0.069 A @ 12 VDC	0.072 A @ 12 VDC	0.069 A @ 12 VDC	0.143 A @ 12 VDC
Field Power	0.115 A @ 24 VDC (32-channel dry contact with internal field circuit supply)	0.01 A @ 24 VDC	0.053 A @ 24 VDC (without internal loop power) 0.466 A @ 24 VDC (16-channel 20 mA current input with internal loop power)	0.038 A @ 24 VDC	0.05 A @ 24 VDC (without internal loop power) 0.25 A @ 24 VDC (16-channel 20 mA current input with internal loop power)	0.022 A @ 24 VDC (without external load) 0.266 A @ 24 VDC (4 channels with 20 mA current output)	0.11 A @ 24 VDC
Physical Characteristics							
Housing	Plastic						
Dimensions	42 x 116 x 130 mm (1.65 x 4.57 x 5.12 in)						
Weight	253 g (0.56 lb)	254 g (0.56 lb)	267 g (0.59 lb)	250 g (0.55 lb)	262 g (0.58 lb)	257 g (0.57 lb)	259 g (0.57 lb)
Environmental Limits							
Operating Temperature	-40 to 75°C (-40 to 167°F) Note: Proper airflow is required in an environment with temperature > 65°C.						
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)						
Ambient Relative Humidity	5 to 95% (non-condensing)						
Altitude	Up to 2000 meters						
Standards and Certifications							
EMC	EN 55032/35, EN 61000-6-2/-6-4						
EMI	CISPR 32, FCC Part 15B Class A						
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz; 10 V/m IEC 61000-4-4 EFT: Power: (DC) 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: (DC) 0.5 kV L-N, 1 kV L/N-PE; Signal: 1 kV; IO: 0.5 kV IEC 61000-4-6 CS: Power: 10 Vrms; Signal: 10 Vrms IEC 61000-4-8 PFMF: 30 A/m						
Safety	UL 61010-1, UL 61010-2-201						
Shock	IEC 60068-2-27						
Vibration	IEC 60068-2-6						
Package Vibration Test	ISTA 1A						
Package Drop Test	ISTA 1A						
Product Series							
	65M-TB-1900-CT-T	65M-TB-2901-CT-T	65M-TB-3600-CT-T	65M-TB-3610-CT-T	65M-TB-3800H-CT-T	65M-TB-4820-CT-T	65M-TB-5801-CT-T
Terminal Blocks for ioPAC 6500							
Physical Characteristics							
ID	D1	D2	A1	A2	A3	A5	F1
Housing	Plastic						
Dimensions	42 x 102.38 x 82 mm (1.65 x 4.03 x 3.23 in)						
Weight	164 g (0.36 lb)						

Intelligent Integrated Node



	65M-BMCM01-CT-T	65M-BMCM02-CT-T	65M-BMCP01-CT-T	65M-BMCP02-CT-T	65M-BMPW01-CT-T	65M-BMPW02-CT-T	65M-BMEXP01-CT-T	65M-BMEXP02-CT-T	65M-BMIO02-CT-T	65M-BMIO04-CT-T
Backplane Modules for ioPAC 6500										
Power Parameters										
Power Consumption	-	-	-	-	-	-	-	-	0.093 A @ 12 VDC	0.117 A @ 12 VDC
Physical Characteristics										
Slots	1	2	1	2	1	2	1	2	2	4
Supported Module	Communication module		CPU module		Power module		Expansion module		IO module	
Housing	Plastic									
Dimensions	43 x 177 x 45.5 mm (1.69 x 6.97 x 1.79 in)	86 x 177 x 45.5 mm (3.39 x 6.97 x 1.79 in)	43 x 177 x 45.5 mm (1.69 x 6.97 x 1.79 in)	86 x 177 x 45.5 mm (3.39 x 6.97 x 1.79 in)	43 x 177 x 45.5 mm (1.69 x 6.97 x 1.79 in)	86 x 177 x 45.5 mm (3.39 x 6.97 x 1.79 in)	43 x 177 x 45.5 mm (1.69 x 6.97 x 1.79 in)	86 x 177 x 45.5 mm (3.39 x 6.97 x 1.79 in)	86 x 177 x 45.5 mm (3.39 x 6.97 x 1.79 in)	172 x 177 x 45.5 mm (6.77 x 6.97 x 1.79 in)
Weight	169 g (0.37 lb)	330 g (0.73 lb)	170 g (0.37 lb)	325 g (0.72 lb)	162 g (0.36 lb)	320 g (0.71 lb)	170 g (0.37 lb)	330 g (0.73 lb)	205 g (0.45 lb)	395 g (0.87 lb)
Installation	DIN-rail mounting, Rack mounting (with optional kit)									
Environmental Limits										
Operating Temperature	-40 to 75°C (-40 to 167°F) Note: Proper airflow is required in an environment with temperature > 65°C.									
Storage Temperature (Package Included)	-40 to 85°C (-40 to 185°F)									
Ambient Relative Humidity	5 to 95% (non-condensing)									
Altitude	2000 m									
Standards and Certifications										
EMC	EN 55032/35, EN 61000-6-2/-6-4									
EMI	CISPR 32, FCC Part 15B Class A									
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz; 10 V/m IEC 61000-4-4 EFT: Power: (DC) 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: (DC) 0.5 kV L-N, 1 kV L/N-PE; Signal: 1 kV; IO: 0.5 kV IEC 61000-4-6 CS: Power: 10 Vrms; Signal: 10 Vrms IEC 61000-4-8 PFMF: 30 A/m									
Shock	IEC 60068-2-27									
Safety	UL 61010-1, UL 61010-2-201									
Vibration	IEC 60068-2-6									
Package Drop Test	ISTA 1A									
Package Vibration Test	ISTA 1A									

OPC UA Software


Moxa's OPC UA software works with our ioLogik remote I/O products to maximize the efficiency of data collection from remote devices. By leveraging the power of our active monitoring technology, our OPC UA software delivers faster response times and bandwidth savings.



OPC UA Software
Product Pages

Create a Secure Data Connection Between OT and IT Systems

Traditionally, it has been difficult for OT and IT engineers to write agent programs to poll the thousands of registers used for shop-floor data. Fieldbus protocols handle shop-floor data, but this data must be written to an IT database. These difficulties are compounded when it comes time to scale up a facility, particularly since the additional load created can put a tremendous strain on systems that rely on legacy data acquisition methods. MX-AOPC UA Suite allows you to collect shop-floor data using Modbus, then provide that data to an OPC UA client such as a SCADA system, or MX-AOPC UA Logger can be used to write the data to an IT database with no additional programming effort. As an added benefit, MX-AOPC UA Suite provides security policy options for encryption and certificate exchange to ensure the security of data connections and transmissions.

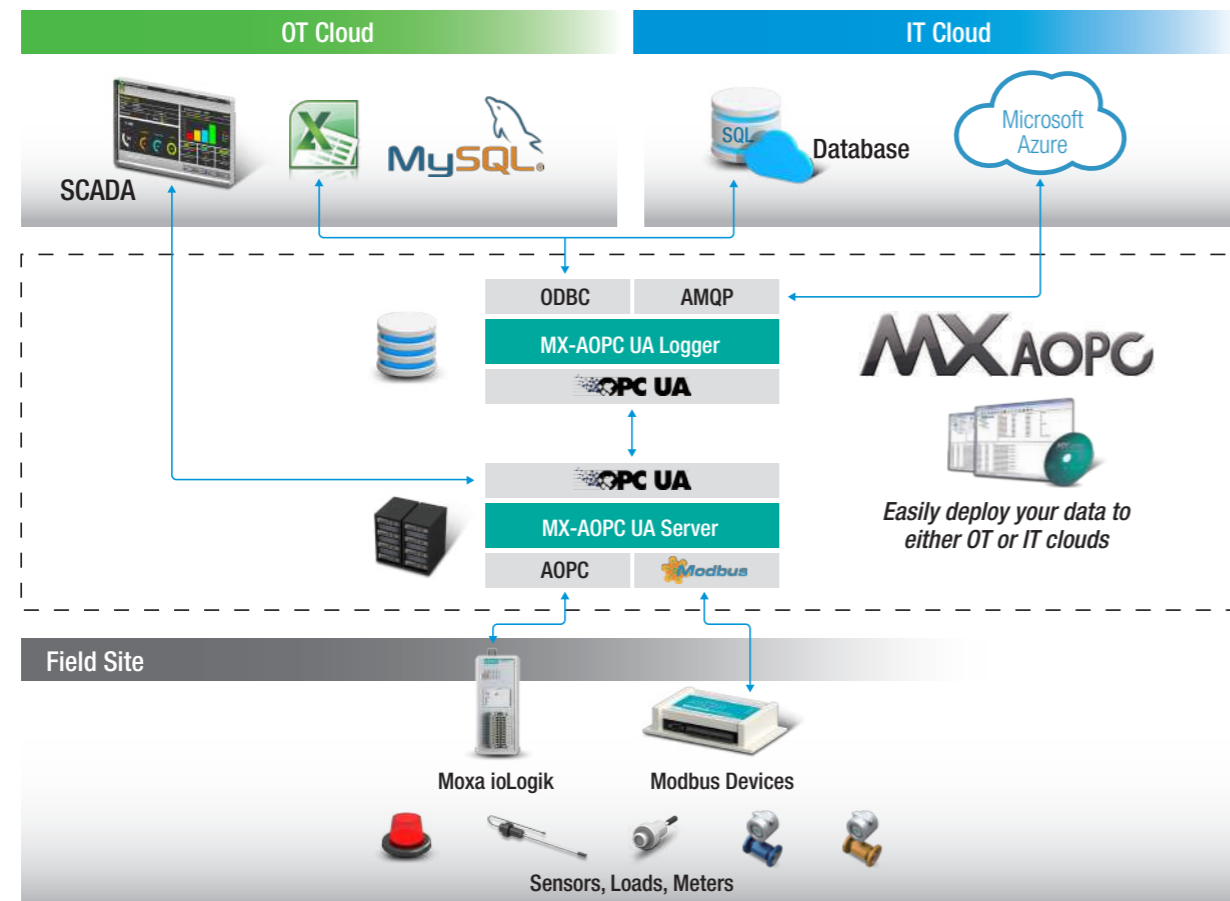

Efficient Data Acquisition Through Push-type Transmission (report by interval or exception method)

Our MX-AOPC UA Server offers both polling and non-polling architectures alongside the standard OPC UA protocol, giving users the alternative of using push-based communication from Moxa devices. With push technology, I/O status is updated to MX-AOPC UA Server only when there is an I/O status change, a preconfigured interval is reached, or when a request is issued by a user. This application of push technology cuts metadata overhead, resulting in faster I/O response times and more accurate data collection than traditional pull-based architectures.



Automatic Data Supplement From SD Cards Following Network Failures

One benefit of using RTUs is that data can be collected over a network from a central site. In an ideal operation, after a network failure, RTUs should be able to transmit data logs that were collected while the network was offline. Moxa's MX-AOPC UA Logger makes this not only possible, but easy. MX-AOPC UA Logger provides a standard OPC interface that interacts with MX-AOPC UA Server for real-time data collection. After each network connection, MX-AOPC UA Logger will compare historical data stored on the SD cards located in individual devices with the real-time data it has already stored locally, and then supplements any missing data by requesting that the RTU retransmit the lost data.



OPC UA Software supports the following devices:

Subcategory	Product Series
Universal controllers & I/Os	ioLogik 2500
	ioLogik E2200
	ioLogik E1200
Rugged controllers & I/Os	ioLogik E1500
	ioPAC 8600



IP Cameras & Video Servers

Moxa's industrial-grade IP surveillance offering includes a range of IP cameras and industrial video servers designed to serve a broad spectrum of industries. They deliver the reliable, high-quality video performance and security standards needed for applications in demanding and unpredictable environments.



IP Cameras & Video Servers
Product Pages



139

IP Cameras

Our selection of IP cameras includes dome, box, and ruggedized cameras that comply with the EN 50155 standard, enabling them to perform reliably and deliver superior image quality suitable for onboard CCTV applications.



141

Video Servers

Moxa's industrial video servers are designed to perform reliably even in harsh environments, making them ideal to serve as the core of a remote monitoring or surveillance solution. Our video servers are capable of using efficient H.264 video compression and allow for easy integration of CCTV cameras into your IP surveillance solution.

IP Cameras



Product Series	VPort P06-1MP-M12	VPort 06-2	VPort P07-2	VPort 07-3	VPort P06HC-1V
Ethernet Interface					
10/100BaseT(X) Ports (M12 D-coded 4-pin Female Connector)	1 (PoE)	1	1 (PoE)	VPort P07-3 models: 1 (PoE)	1 (PoE)
System Boot		-		Secure Boot	-
Power Parameters					
Source of Input Power	PoE (IEEE 802.3af)	VPort P06-2 models: PoE (IEEE 802.3af)	PoE (IEEE 802.3af)	VPort P07-3 models: PoE (IEEE 802.3af)	PoE (IEEE 802.3af)
Input Voltage	-	VPort 06-2 models: 12/24 VDC	-	VPort 07-3 models: 12/24 VDC	-
Power Connector	-	VPort 06-2 models: DB9 connector	-	VPort 07-3 models: DB9 connector	-
Camera Characteristics					
Lens	<ul style="list-style-type: none"> CAM28 models: f=2.8 mm, F2.0, Diagonal 126°, Horizontal 113°, Vertical 58° CAM36 models: f=3.6 mm, F1.6, Diagonal 99°, Horizontal 94°, Vertical 47° CAM42 models: f=4.2 mm, F1.8, Diagonal 87°, Horizontal 80°, Vertical 43° CAM60 models: f=6.0 mm, F1.6, Diagonal 60°, Horizontal 55°, Vertical 29° CAM80 models: f=8.0 mm, F1.6, Diagonal 45°, Horizontal 40°, Vertical 22° 	<ul style="list-style-type: none"> 2x28M models: f=2.8 mm, F2.0, Diagonal 94°, Horizontal 85°, Vertical 45° 2x36M models: f=3.6 mm, F1.6, Diagonal 99°, Horizontal 70°, Vertical 39° 2x42M models: f=4.2 mm, F1.6, Diagonal 82°, Horizontal 62°, Vertical 34° 2x60M models: f=6.0 mm, F1.8, Diagonal 62°, Horizontal 43°, Vertical 24° 2x80M models: f=8.0 mm, F1.6, Diagonal 42°, Horizontal 33°, Vertical 17° 	<ul style="list-style-type: none"> 2x24M models: f=2.4 mm, F2.0, Diagonal 158°, Horizontal 137°, Vertical 76° 2x36M models: f=3.6 mm, F1.6, Diagonal 97°, Horizontal 75°, Vertical 55° 2x42M models: f=4.2 mm, F1.6, Diagonal 82°, Horizontal 64°, Vertical 47° 2x60M models: f=6.0 mm, F1.8, Diagonal 57°, Horizontal 43°, Vertical 32° 2x80M models: f=8.0 mm, F1.6, Diagonal 41°, Horizontal 33°, Vertical 24° 	<ul style="list-style-type: none"> 3x24M models: f=2.4 mm, F2.0, Diagonal 139°, Horizontal 110°, Vertical 81° 3x36M models: f=3.6 mm, F1.6, Diagonal 97°, Horizontal 75°, Vertical 55° 3x42M models: f=4.2 mm, F1.6, Diagonal 82°, Horizontal 64°, Vertical 47° 3x60M models: f=6.0 mm, F1.8, Diagonal 57°, Horizontal 43°, Vertical 32° 3x80M models: f=8.0 mm, F1.6, Diagonal 41°, Horizontal 33°, Vertical 24° 	<ul style="list-style-type: none"> 1V28M models: f=2.8 mm, F2.0, Diagonal 126°, Horizontal 113°, Vertical 58° 1V36M models: f=3.6 mm, F1.6, Diagonal 99°, Horizontal 94°, Vertical 47° 1V42M models: f=4.2 mm, F1.8, Diagonal 87°, Horizontal 80°, Vertical 43° 1V60M models: f=6.0 mm, F1.6, Diagonal 60°, Horizontal 55°, Vertical 29° 1V80M models: f=8.0 mm, F1.6, Diagonal 45°, Horizontal 40°, Vertical 22°
Minimum Illumination	Color: 0.2 lux, at F1.2 (Gain High, 50 IRE, 1/30 sec)				
White Balance	ATW/AWB				
Electronic Shutter	Auto, Fixed (1/30 to 1/25000 sec)				Auto (1/30 to 1/25000 sec)
DNR (Digital Noise Reduction)	Built-in 2D/3D DNR				Built-in DNR
WDR (Wide Dynamic Range)	110 dB	100 dB	80 dB	100 dB	110 dB
Image Rotation	Flip, Mirror, 180° rotation		Flip, Mirror, 90°, 180°, 270° rotation		Flip, Mirror, 180° rotation
AGC (Auto Gain Control)	2X, 4X, 8X, 16X, 32X, 64X		2X, 4X, 8X, 16X		2X, 4X, 8X, 16X, 32X, 64X
BLC (Back Light Compensation)	High/Medium/Low		-		High/Medium/Low
Video Interface					
Video Compression	H.264 (ISO/IEC 14496-10) or MJPEG		H.265 (MPEG-H part 2/HEVC), H.264 (ISO/IEC 14496-10/AVC), or MJPEG		H.264 (ISO/IEC 14496-10) or MJPEG
Video Streams	3 independent H.264 or MJPEG video streams	4 independent H.264 or MJPEG video streams	4 independent video streams		3 independent H.264 or MJPEG video streams
Video Resolution and FPS (Frames per Second)	Up to 1280 x 800 @ 30 FPS	Up to 1920 x 1080 @ 30 FPS	Up to 1920 x 1080 @ 60 FPS (WDR off)	Up to 1920 x 1080 @ 30 FPS Up to 2048 x 1536 @ 20 FPS	Up to 1280 x 800 @ 30 FPS
Input/Output Interface					
Digital Input Channels	-	1	-	1	-
Digital Output Channels	-	-	-	-	1
Connector	5-pin A-coded male M12 connector with 20 cm cable				
Audio Interface					
Audio Inputs	1 x Line-in	VPort 06/P06-2MxxM models: 1 x Built-in microphone VPort 06/P06-2LxxM models: 1 x Line-in	-	VPort 07/P07-3MxxM models: 1 x Built-in microphone VPort 07/P07-3LxxM models: 1 x Line-in	-
Camera Software Development					
Video Standards	ONVIF Profile S		ONVIF Profile S, T, M		ONVIF Profile S
Camera Alarm Software Features					
Intelligent Video	Camera tampering detection				
Physical Characteristics					
Housing	Plastic top cover, Metal bottom plate IP66 rain and dust protection IK10 vandal-resistant protection Transparent PC cover	IP66 rain and dust protection Metal housing, PC dome cover IK8 vandal-resistant protection	Plastic top cover, Metal bottom plate IP66 rain and dust protection IK10 vandal-resistant protection Transparent PC cover	IP66 rain and dust protection Metal housing, PC dome cover IK8 vandal-resistant protection Built-in heater for dome cover demist	Metal
Dimensions	110 x 47 mm (4.33 x 1.85 in)	110 x 115.5 x 61.8 mm (4.33 x 4.53 x 2.43 in)	110 x 47 mm (4.33 x 1.85 in)	110 x 115.5 x 61.8 mm (4.33 x 4.53 x 2.43 in)	60 x 60 x 74.6 mm (2.36 x 2.36 x 2.94 in)
Protection	PCB conformal coating is optional and provided on request. If conformal coating is required, please contact Moxa.				
Environmental Limits					
Operating Temperature	Standard models: -25 to 55°C (-13 to 131°F) Wide temp. models: -40 to 70°C (-40 to 158°F)		-40 to 60°C (-40 to 140°F)	Standard models: -40 to 55°C (-40 to 131°F) Wide temp. models: -40 to 70°C (-40 to 158°F)	-40 to 55°C (-40 to 131°F)
Vandal Resistance	EN 62262, IK10	EN 62262, IK8	EN 62262, IK10		EN 62262, IK8
Standards and Certifications					
Railway Fire Protection	EN 45545-2				
Railway	EN 50155 (complies with a portion of EN 50155 specifications)				
MTBF					
Time	1,944,687 hrs	1,039,008 hrs (min.)	5,990,924 hrs	3,826,277 hrs	692,847 hrs

Note: Once any stream is configured for 3-megapixel resolution, all video streams will be limited to 20 FPS maximum at all resolutions due to sensor limitations.

IP Cameras



Product Series	VPort P16-2MR	VPort 06EC-2V
Ethernet Interface		
10/100BaseT(X) Ports (M12 D-coded 4-pin Female Connector)	1 (PoE)	
Power Parameters		
No. of Power Inputs	1	1 x PoE for camera 1 x 24 VDC for heater
Input Voltage	-	24 VDC for front-window heater (for defrosting)
Camera Characteristics		
Lens	<ul style="list-style-type: none"> 2MR36M models: f=3.6 mm, F1.6, Diagonal 99°, Horizontal 70°, Vertical 39° 2MR42M models: f=4.2 mm, F1.6, Diagonal 82°, Horizontal 62°, Vertical 34° 2MR60M models: f=6.0 mm, F1.8, Diagonal 62°, Horizontal 43°, Vertical 24° 2MR80M models: f=8.0 mm, F1.6, Diagonal 42°, Horizontal 33°, Vertical 17° 	<ul style="list-style-type: none"> 2V36M models: f=3.6 mm, F1.6, Diagonal 99°, Horizontal 70°, Vertical 39° 2V42M models: f=4.2 mm, F1.6, Diagonal 82°, Horizontal 62°, Vertical 34° 2V60M models: f=6.0 mm, F1.8, Diagonal 62°, Horizontal 43°, Vertical 24° 2V80M models: f=8.0 mm, F1.6, Diagonal 42°, Horizontal 33°, Vertical 17°
Minimum Illumination	Color: 0.2 lux, at F1.2 (Gain High, 50 IRE, 1/30 sec) B/W: 0.05 lux, at F1.2 (Gain High, 50 IRE, 1/30 sec) Note: 0 lux if IR illuminator is on	Color: 0.2 lux, at F1.2 (Gain High, 50 IRE, 1/30 sec) B/W: 0.05 lux, at F1.2 (Gain High, 50 IRE, 1/30 sec)
Camera Angle	Pan: 350°, Tilt: 65° (controlled manually)	Pan: ±5°, Tilt: +10/-5° (controlled manually)
Day & Night	Auto/Color/BW; ICR control	
ICR Control	Auto (light sensor control) or DI control	Auto
White Balance	ATW/AWB	
Electronic Shutter	Auto, Fixed (1/30 to 1/25000 sec)	
DNR (Digital Noise Reduction)	Built-in 2D/3D DNR	
WDR (Wide Dynamic Range)	100 dB	
Image Rotation	Flip, Mirror, 90°, 180°, 270° rotation	
AGC (Auto Gain Control)	2X, 4X, 8X, 16X	
BLC (Back Light Compensation)	-	
IR Illumination	IR LED illuminators, 5-meter (max.) effective distance; On/Off controlled manually (night mode) or by the light sensor	-
Video Interface		
Video Compression	H.264 (ISO/IEC 14496-10) or MJPEG	
Video Streams	4 independent H.264 or MJPEG video streams	
Video Resolution and FPS (Frames per Second)	Up to 1920 x 1080 @ 30 FPS	
Input/Output Interface		
Digital Input Channels	1	-
Digital Output Channels	-	1
Connector	5-pin A-coded male M12 connector with 20 cm cable	
Audio Interface		
Audio Inputs	1 x Built-in microphone	-
Memory		
microSD Slot	SDXC	
Camera Software Development		
Video Standards	ONVIF Profile S	
Camera Alarm Software Features		
Intelligent Video	Camera tampering detection	
Physical Characteristics		
Housing	IP66 rain and dust protection, Metal housing, PC dome cover, IK8 vandal-resistant protection	Metal, IP67, Transparent glass cover
Dimensions	125 x 125 x 120.7 mm (4.92 x 4.92 x 4.8 in)	83 x 168 x 233 mm (3.27 x 6.61 x 8.78 in)
Protection	PCB conformal coating is optional and provided on request. If conformal coating is required, please contact Moxa.	
		-CT models: PCB conformal coating
Environmental Limits		
Operating Temperature	Standard models: -25 to 55°C (-13 to 131°F) Wide temp. models: -40 to 70°C (-40 to 158°F)	
Ingress Protection	IEC 60529, IP66	IEC 60529, IP67
Vandal Resistance	EN 62262, IK8	-
Standards and Certifications		
Railway Fire Protection	EN 45545-2	
Railway	EN 50155 (complies with a portion of EN 50155 specifications)	
MTBF		
Time	997,474 hrs	480,269 hrs

Video Servers



Product Series	VPort 461A	VPort 464
Memory		
microSD Slot	SDXC	
Input/Output Interface		
Digital Input Channels	2	4
Relay Channels	2	
Ethernet Interface		
10/100BaseT(X) Ports (RJ45 Connector)	2	
Serial Interface		
PTZ Port	1 x RS-232 or RS-422/485 port, Terminal block connector, 115.2 kbps	
COM Port	1 x RS-232 or RS-485 port, DB9 male connector, 115.2 kbps	
Power Parameters		
No. of Power Inputs	2	
Operating Voltage	12 to 32 VDC, 18 to 30 VAC, Redundant dual inputs	
Video Interface		
Video Compression	H.264 (ISO/IEC 14496-10) or MJPEG	
Video Input	1, BNC connector (1.0 Vpp, 75 ohm)	4, BNC connector (1.0 Vpp, 75 ohm)
Video Streams	4 independent H.264 or MJPEG video streams	2 independent H.264 or MJPEG video streams 1 quad (4-channel images) stream
NTSC/PAL	Auto-sensing or manual	
Video Resolution and FPS (Frames per Second)	Up to 720 x 480 @ 30 FPS Up to 720 x 576 @ 25 FPS	
Audio Interface		
Audio Inputs	1 x Line-in or mic-in with 3.5 mm phone jack	
Audio Outputs	1 x Line-out with 3.5 mm phone jack	
Camera Software Development		
Video Standards	ONVIF Profile S	
Camera PAN/TILT/ZOOM		
PTZ Camera Control	Via PTZ port or COM port	
Protocols	Pelco D, Pelco P, Custom Camera	
Camera Alarm Software Features		
Intelligent Video	Camera tampering detection	
Physical Characteristics		
Housing	Metal	
Dimensions	46 x 134 x 105 mm (1.81 x 5.31 x 4.13 in)	80.2 x 135 x 105 mm (3.16 x 5.31 x 4.13 in)
Installation	DIN-rail mounting, Wall mounting (with optional kit)	
Environmental Limits		
Operating Temperature	Standard models: -25 to 60°C (-13 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)	
Standards and Certifications		
EMI	CISPR 32, FCC Part 15B Class A	
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF	
Freefall	IEC 60068-2-31	
Safety	UL 62368-1	
Shock	IEC 60068-2-27	
Vibration	IEC 60068-2-6	
MTBF		
Time	862,568 hrs	827,831 hrs

This page is intentionally left blank.

Industrial Computing

Moxa offers an extensive range of industrial-grade, fanless computers for tough environments. These products are built to operate reliably in extreme conditions, such as continuous exposure to extreme temperatures, humidity, vibration, and power surges. Our products have been successfully deployed in automation systems for heavy industries, substations, solar energy management, battery energy storage, water/wastewater management, transportation, oil and gas, and marine vessels.



Industrial Computing Product Pages



145

x86 Computers

Moxa's x86 industrial-grade fanless computers have passed rigorous tests and strictly adhere to industrial standards to ensure they can provide long-lasting, reliable operation even in harsh environments, making them perfect for a variety of industrial automation applications.



154

Arm-based Computers

Moxa's Arm-based computers, featuring Moxa Industrial Linux (MIL), are compliant with IEC 62443-4-2 Security Level 2 requirements. These computers deliver superior system performance and shorten development cycles by up to six months. With a 5-year hardware warranty and a 10-year software maintenance commitment, our Arm-based computers lower the total cost of ownership (TCO) and ensure long-term reliability for mission-critical remote monitoring and data acquisition.



162

EN 50155 Computers

Moxa's EN 50155 computers offer reliable connectivity for automation systems and devices. These computers are equipped with a rich set of interfaces and M12 connectors for stable connections in vibration-prone environments. Our computers comply with EN 50155 mandatory test items and are certified for shock and vibration resistance through industrial-grade testing. Their rugged design makes them an ideal choice for transportation applications.



163

IEC 61850-3 Computers

Moxa's IEC 61850-3 computers deliver stable and reliable systems for power applications. These computers are designed based on the IEC 61850-3 standard, making them capable of withstanding high EMI. The computers efficiently handle high-speed, low-latency communications for large data transfers. Their redundant power supply design ensures continuous system availability for power infrastructure.



165

IIoT Gateways

Moxa's IIoT gateways offer an out-of-the-box experience for rapid deployment and immediate results. Designed for secure, reliable industrial connectivity, they seamlessly connect field data to business intelligence, providing real-time, actionable insights through built-in protocols and cloud integrations. Leverage their intuitive no-code utilities that eliminate complex programming along with integrated buffering for zero data loss to accelerate your digital transformation.



166

Panel PCs

Moxa's industrial-grade panel PCs are built to withstand the elements and feature a ruggedized design that makes them ideal for HMI applications in outdoor, hazardous, rail-onboard, and marine environments. Certifications include CID2, ATEX Zone 2, IECEx, and DNV.

x86 Computers



Product Series	DRP-A100-E2-T DRP-A100-E4-T	DRP-A100-E2-8L-T DRP-A100-E4-8L-T	DRP-A100-E2-6C-T DRP-A100-E4-6C-T	DRP-A100-E2-2L4C-T DRP-A100-E4-2L4C-T
Computer				
CPU	DRP-A100-E2 models: Intel Atom® x6211E (dual-core, 1.5M cache, 1.30 GHz) DRP-A100-E4 models: Intel Atom® x6425E (quad-core, 1.5M cache, 2.00 GHz)			
System Memory Slot	1 x SODIMM DDR4 slot (8 GB preinstalled, 32 GB max.)			
Storage Slot	1 x CFast slot (SATA III interface) 1 x SD slot, SD 3.0 interface (SDHC/SDXC)			
Supported OS	Windows images and drivers supported: <ul style="list-style-type: none"> Windows 10 IoT Enterprise LTSC 2021 (64-bit) Windows 11 Professional (64-bit) Windows 11 IoT Enterprise LTSC 2024 (64-bit) Linux drivers supported: <ul style="list-style-type: none"> Debian 12 (kernel 6.1) Ubuntu 24.04 (kernel 6.1) RHEL 9 (kernel 5.14) 			
Computer Interface				
Ethernet Ports	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	10 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)
Serial Ports	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	8 x RS-232/422/485 ports (software-selectable, DB9 male connector)	6 x RS-232/422/485 ports (software-selectable, DB9 male connector)
USB 3.0	3 x USB 3.0 hosts (type-A connector)			
TPM	TPM v2.0			
Video Output	1 x HDMI 2.0b (type-A connector) 1 x VGA (15-pin D-sub female connector)			
Power Parameters				
Input Voltage	12/24 VDC			
Physical Characteristics				
Dimensions	60 x 130 x 150 mm (2.36 x 5.12 x 5.91 in)	94 x 130 x 150 mm (3.70 x 5.12 x 5.91 in)		
Weight	1,213 g (2.67 lb)	1,612 g (3.55 lb)		
Installation	DIN-rail mounting			
Environmental Limits				
Operating Temperature	-30 to 60°C (-22 to 140°F)			
Warranty				
Warranty Period	3 years			

x86 Computers



Product Series	DRP-C100-C1-T DRP-C100-C5-T DRP-C100-C7-T	DRP-C100-C1-8L-T DRP-C100-C5-8L-T DRP-C100-C7-8L-T	DRP-C100-C1-6C-T DRP-C100-C5-6C-T DRP-C100-C7-6C-T	DRP-C100-C1-2L4C-T DRP-C100-C5-2L4C-T DRP-C100-C7-2L4C-T
Computer				
CPU	DRP-C100-C1 models: Intel® Celeron® 6305E (dual-core, 4M cache, 1.80 GHz) DRP-C100-C5 models: Intel® Core™ i5-1145G7E (quad-core, 8M cache, 2.60 GHz, base: 1.50 GHz) DRP-C100-C7 models: Intel® Core™ i7-1185G7E (quad-core, 12M cache, 2.80 GHz, base: 1.80 GHz)			
System Memory Slot	1 x SODIMM DDR4 slot (8 GB preinstalled, 32 GB max.)			
Storage Slot	1 x CFast slot (SATA III interface) 1 x SD slot, SD 3.0 interface (SDHC/SDXC)			
Supported OS	Windows images and drivers supported: <ul style="list-style-type: none"> Windows 10 IoT Enterprise LTSC 2021 (64-bit) Windows 11 Professional (64-bit) Windows 11 IoT Enterprise LTSC 2024 (64-bit) Linux drivers supported: <ul style="list-style-type: none"> Debian 12 (kernel 6.1) Ubuntu 24.04 (kernel 6.1) RHEL 9 (kernel 5.14) 			
Computer Interface				
Ethernet Ports	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	10 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)
Serial Ports	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	8 x RS-232/422/485 ports (software-selectable, DB9 male connector)	6 x RS-232/422/485 ports (software-selectable, DB9 male connector)
USB 3.0	3 x USB 3.0 hosts (type-A connector)			
TPM	TPM v2.0			
Video Output	1 x HDMI 2.0b (type-A connector) 1 x VGA (15-pin D-sub female connector)			
Power Parameters				
Input Voltage	12/24 VDC			
Physical Characteristics				
Dimensions	60 x 130 x 150 mm (2.36 x 5.12 x 5.91 in)	94 x 130 x 150 mm (3.70 x 5.12 x 5.91 in)		
Weight	1,213 g (2.67 lb)	1,612 g (3.55 lb)		
Installation	DIN-rail mounting			
Environmental Limits				
Operating Temperature	-30 to 60°C (-22 to 140°F)			
Warranty				
Warranty Period	3 years			

x86 Computers



Product Series	BXP-A100-E2-T BXP-A100-E4-T	BXP-A100-E2-8L-T BXP-A100-E4-8L-T	BXP-A100-E2-8C-T BXP-A100-E4-8C-T	BXP-A100-E2-2L3C-T BXP-A100-E4-2L3C-T	BXP-A101-E2-T BXP-A101-E4-T	BXP-A101-E2-DR-T BXP-A101-E4-DR-T	BXP-A101-E2-M2-T BXP-A101-E4-M2-T	BXP-A101-E2-M2-DR-T BXP-A101-E4-M2-DR-T
Computer								
CPU	BXP-A100-E2, BXP-A101-E2 models: Intel Atom® x6211E (dual-core, 1.5M cache, 1.30 GHz) BXP-A100-E4, BXP-A101-E4 models: Intel Atom® x6425E (quad-core, 1.5M cache, 2.00 GHz)							
System Memory Slot	1 x SODIMM DDR4 slot (8 GB preinstalled, 32 GB max.)							
Storage Slot	1 x CFast slot (SATA III interface) 1 x SD slot, SD 3.0 interface (SDHC/SDXC)				1 x CFast slot (SATA III interface) 1 x SD slot, SD 3.0 interface (SDHC/SDXC) 1 x M.2 M-key 2242 slot			
Supported OS	Windows images and drivers supported: • Windows 10 IoT Enterprise LTSC 2021 (64-bit) • Windows 11 Professional (64-bit) • Windows 11 IoT Enterprise LTSC 2024 (64-bit) Linux drivers supported: • Debian 12 (kernel 6.1) • Ubuntu 24.04 LTS (kernel 6.1) • RHEL 9 (kernel 5.14)				Windows images and drivers supported: • Windows 10 IoT Enterprise LTSC 2021 (64-bit) • Windows 11 Professional (64-bit) • Windows 11 IoT Enterprise LTSC 2024 (64-bit) Linux images supported: • Debian 12 (kernel 6.1) Linux drivers supported: • Debian 12 (kernel 6.1) • Ubuntu 22.04 LTS (kernel 5.15) • RHEL 9 (kernel 5.14)			
Computer Interface								
Ethernet Ports	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	10 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)			
Serial Ports	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	10 x RS-232/422/485 ports (software-selectable, DB9 male connector)	5 x RS-232/422/485 ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)			
USB 3.0	2 x USB 3.0 hosts (type-A connector)							
USB 2.0	4 x USB 2.0 hosts (type-A connector)							
Digital Input	4 x DIs							
Digital Output	4 x DOs							
TPM	TPM v2.0							
Video Output	1 x HDMI 2.0b (type-A connector) 1 x VGA (15-pin D-sub female connector)				1 x HDMI 2.0b (type-A connector)			
Power Parameters								
Input Voltage	12/24 VDC							
Physical Characteristics								
Dimensions	210 x 166 x 48 mm (8.27 x 6.54 x 1.9 in)	210 x 166 x 65.5 mm (8.27 x 6.54 x 2.58 in)	210 x 166 x 83 mm (8.27 x 6.54 x 3.27 in)	210 x 166 x 65.5 mm (8.27 x 6.54 x 2.58 in)	207 x 116.1 x 44.5 mm (8.14 x 4.57 x 1.75 in)	186 x 121 x 46.7 mm (7.32 x 4.76 x 1.84 in)	207 x 116.1 x 44.5 mm (8.14 x 4.57 x 1.75 in)	186 x 121 x 46.7 mm (7.32 x 4.76 x 1.84 in)
Weight	2,015 g (4.44 lb)	2,355 g (5.19 lb)	2,385 g (5.25 lb)	2,208 g (4.86 lb)	1,225 g (2.7 lb)	1,500 g (3.3 lb)	1,225 g (2.7 lb)	1,500 g (3.3 lb)
Installation	Wall mounting				DIN-rail mounting	Wall mounting	DIN-rail mounting	
Environmental Limits								
Operating Temperature	-30 to 60°C (-22 to 140°F)				-30 to 70°C (-22 to 158°F)			
Warranty								
Warranty Period	3 years							


x86 Computers

Preliminary



Product Series	BXP-C100-C1-T BXP-C100-C5-T BXP-C100-C7-T	BXP-C100-C1-8L-T BXP-C100-C5-8L-T BXP-C100-C7-8L-T	BXP-C100-C1-8C-T BXP-C100-C5-8C-T BXP-C100-C7-8C-T	BXP-C100-C1-2L3C-T BXP-C100-C5-2L3C-T BXP-C100-C7-2L3C-T	BXP-C101-C3-S1-T BXP-C101-C3-S2-T BXP-C101-C5-S1-T BXP-C101-C5-S2-T BXP-C101-C7-S1-T BXP-C101-C7-S2-T
Computer					
CPU	BXP-C100-C1 models: Intel® Celeron® 6305E (dual-core, 4M cache, 1.80 GHz) BXP-C100-C5 models: Intel® Core™ i5-1145G7E (quad-core, 8M cache, 2.60 GHz, base: 1.50 GHz) BXP-C100-C7 models: Intel® Core™ i7-1185G7E (quad-core, 12M cache, 2.80 GHz, base: 1.80 GHz)				BXP-C101-C3 models: Intel® Core™ 3 100U (10M cache, up to 4.70 GHz) BXP-C101-C5 models: Intel® Core™ 5 120U (12M cache, up to 5.00 GHz) BXP-C101-C7 models: Intel® Core™ 7 150U (12M cache, up to 5.40 GHz)
System Memory Slot	1 x SODIMM DDR4 slot (8 GB preinstalled, 32 GB max.)				
Storage Slot	1 x CFast slot (SATA III interface) 1 x SD slot, SD 3.0 interface (SDHC/SDXC)				1 x CFast slot (SATA III interface) 1 x M.2 M-key 2242 slot
Supported OS	Windows images and drivers supported: • Windows 10 IoT Enterprise LTSC 2021 (64-bit) • Windows 11 Professional (64-bit) • Windows 11 IoT Enterprise LTSC 2024 (64-bit) Linux drivers supported: • Debian 12 (kernel 6.1) • Ubuntu 24.04 LTS (kernel 6.1) • RHEL 9 (kernel 5.14)				Windows images and drivers supported: • Windows 10 IoT Enterprise LTSC 2021 (64-bit) • Windows 11 Professional (64-bit) • Windows 11 IoT Enterprise LTSC 2024 (64-bit) Linux images supported: • MIL 4.0 Linux drivers supported: • x86 Linux SDK Wizard • Debian 13 (kernel 6.12) • Ubuntu 24.04 LTS (kernel 6.1) • RHEL 9 (kernel 5.14)
Computer Interface					
Ethernet Ports	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	10 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)
Serial Ports	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	10 x RS-232/422/485 ports (software-selectable, DB9 male connector)	5 x RS-232/422/485 ports (software-selectable, DB9 male connector)	-S1 models: 2 x RS-232/422/485 ports (software-selectable, DB9 male connector)
USB 3.0	2 x USB 3.0 hosts (type-A connector)				4 x USB 3.0 hosts (type-A connector)
USB 2.0	4 x USB 2.0 hosts (type-A connector)				2 x USB 2.0 hosts (type-A connector)
Digital Input	4 x DIs				-S2 models: 5 x DIs
Digital Output	4 x DOs				-S2 models: 6 x DOs
TPM	TPM v2.0				
Video Output	1 x HDMI 2.0b (type-A connector) 1 x VGA (15-pin D-sub female connector)				1 x HDMI 2.1 (type-A connector) 1 x DisplayPort
Power Parameters					
Input Voltage	12/24 VDC				
Physical Characteristics					
Dimensions	210 x 166 x 48 mm (8.27 x 6.54 x 1.9 in)	210 x 166 x 65.5 mm (8.27 x 6.54 x 2.58 in)	210 x 166 x 83 mm (8.27 x 6.54 x 3.27 in)	210 x 166 x 65.5 mm (8.27 x 6.54 x 2.58 in)	217 x 141.5 x 44.5 mm (8.54 x 5.57 x 1.75 in)
Weight	2,015 g (4.44 lb)	2,355 g (5.19 lb)	2,385 g (5.25 lb)	2,208 g (4.86 lb)	1,225 g (2.7 lb)
Installation	Wall mounting				Wall mounting, DIN-rail mounting (with optional kit)
Environmental Limits					
Operating Temperature	-30 to 60°C (-22 to 140°F)				-30 to 70°C (-22 to 158°F)
Warranty					
Warranty Period	3 years				

x86 Computers



Product Series	RKP-A110-E2-T RKP-A110-E4-T	RKP-A110-E2-8L-T RKP-A110-E4-8L-T	RKP-A110-E2-8C-T RKP-A110-E4-8C-T	RKP-A110-E2-2L4C-T RKP-A110-E4-2L4C-T
Computer				
CPU	RKP-A110-E2 models: Intel Atom® x6211E (dual-core, 1.5M cache, 1.30 GHz) RKP-A110-E4 models: Intel Atom® x6425E (quad-core, 1.5M cache, 2.00 GHz)			
System Memory Slot	1 x SODIMM DDR4 slot (8 GB preinstalled, 32 GB max.)			
Storage Slot	2 x 2.5-inch SSD slots (SATA III interface)			
Supported OS	Windows images and drivers supported: <ul style="list-style-type: none"> Windows 10 IoT Enterprise LTSC 2021 (64-bit) Windows 11 Professional (64-bit) Windows 11 IoT Enterprise LTSC 2024 (64-bit) Linux drivers supported: <ul style="list-style-type: none"> Debian 12 (kernel 6.1) Ubuntu 24.04 LTS (kernel 6.1) RHEL 9 (kernel 5.14) 			
Computer Interface				
Ethernet Ports	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	12 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	6 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)
Serial Ports	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	10 x RS-232/422/485 ports (software-selectable, DB9 male connector)	6 x RS-232/422/485 ports (software-selectable, DB9 male connector)
USB 3.0	3 x USB 3.0 hosts (type-A connector)			
Digital Input	8 x DIs			
Digital Output	8 x DOs			
TPM	TPM v2.0			
Video Output	1 x HDMI 2.0b (type-A connector) 1 x VGA (15-pin D-sub female connector)			
Power Parameters				
Input Voltage	12/24 VDC			
Physical Characteristics				
Dimensions	440 x 230 x 43.6 mm (17.32 x 9.06 x 1.72 in)			
Weight	3,330 g (7.34 lb)	3,510 g (7.74 lb)	3,520 g (7.76 lb)	3,520 g (7.76 lb)
Installation	Rack mounting (standard 1U)			
Environmental Limits				
Operating Temperature	-30 to 60°C (-22 to 140°F)			
Warranty				
Warranty Period	3 years			

x86 Computers



Product Series	RKP-C110-C1-T RKP-C110-C3-T RKP-C110-C5-T RKP-C110-C7-T	RKP-C110-C1-8L-T RKP-C110-C3-8L-T RKP-C110-C5-8L-T RKP-C110-C7-8L-T	RKP-C110-C1-8C-T RKP-C110-C3-8C-T RKP-C110-C5-8C-T RKP-C110-C7-8C-T	RKP-C110-C1-2L4C-T RKP-C110-C3-2L4C-T RKP-C110-C5-2L4C-T RKP-C110-C7-2L4C-T	RKP-C110-C1-2HV-T RKP-C110-C3-2HV-T RKP-C110-C5-2HV-T RKP-C110-C7-2HV-T
Computer					
CPU	RKP-C110-C1 models: Intel® Celeron® 6305E (dual-core, 4M cache, 1.80 GHz) RKP-C110-C3 models: Intel® Core™ i3-1115G4E (quad-core, 4M cache, 3 GHz, base: 2.20 GHz) RKP-C110-C5 models: Intel® Core™ i5-1145G7E (quad-core, 8M cache, 2.60 GHz, base: 1.50 GHz) RKP-C110-C7 models: Intel® Core™ i7-1185G7E (quad-core, 12M cache, 2.80 GHz, base: 1.80 GHz)				
System Memory Slot	1 x SODIMM DDR4 slot (8 GB preinstalled, 32 GB max.)				
Storage Slot	2 x 2.5-inch SSD slots (SATA III interface, RAID 0/1 support)				
Supported OS	Windows images and drivers supported: <ul style="list-style-type: none"> Windows Server 2022 (driver only) Windows 10 IoT Enterprise LTSC 2021 (64-bit) Windows 11 Professional (64-bit) Windows 11 IoT Enterprise LTSC 2024 (64-bit) Linux drivers supported: <ul style="list-style-type: none"> Debian 12 (kernel 6.1) Ubuntu 24.04 LTS (kernel 6.1) RHEL 9 (kernel 5.14) 				
Computer Interface					
Ethernet Ports	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	12 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	6 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)
Serial Ports	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	10 x RS-232/422/485 ports (software-selectable, DB9 male connector)	6 x RS-232/422/485 ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)
USB 3.0	3 x USB 3.0 hosts (type-A connector)				
Digital Input	8 x DIs				
Digital Output	8 x DOs				
TPM	TPM v2.0				
Video Output	1 x HDMI 2.0b (type-A connector) 1 x VGA (15-pin D-sub female connector)				
Power Parameters					
Input Voltage	12/24 VDC				100 to 240 VAC/VDC
Physical Characteristics					
Dimensions	440 x 230 x 43.6 mm (17.32 x 9.06 x 1.72 in)				440 x 360 x 43.65 mm (17.32 x 14.17 x 1.72 in)
Weight	3,350 g (7.38 lb)	3,800 g (8.37 lb)	3,610 g (7.95 lb)	3,540 g (7.80 lb)	5,616 g (12.38 lb)
Installation	Rack mounting (standard 1U)				
Environmental Limits					
Operating Temperature	-30 to 60°C (-22 to 140°F)				
Warranty					
Warranty Period	3 years				

x86 Computers



Product Series	RKP-C220-C3-T RKP-C220-C5-T RKP-C220-C7-T RKP-C220-C9-T	RKP-C220-C3-4L-T RKP-C220-C5-4L-T RKP-C220-C7-4L-T RKP-C220-C9-4L-T	RKP-C220-C3-8C-T RKP-C220-C5-8C-T RKP-C220-C7-8C-T RKP-C220-C9-8C-T	RKP-C220-C3-2CB6C-T RKP-C220-C5-2CB6C-T RKP-C220-C7-2CB6C-T RKP-C220-C9-2CB6C-T
Computer				
CPU	RKP-C220-C3 models: Intel® Core™ i3-13100TE RKP-C220-C5 models: Intel® Core™ i5-13500TE RKP-C220-C7 models: Intel® Core™ i7-13700TE RKP-C220-C9 models: Intel® Core™ i9-13900TE			
System Memory Slot	2 x SODIMM DDR4 slots (8 GB preinstalled, 64 GB max.)			
Storage Slot	2 x 2.5-inch SSD slots (SATA III interface, RAID 0/1 support) 1 x M.2 M-key 2280 socket (PCIe interface, NVMe support) 2 x M.2 M-key 2242 sockets (PCIe interface, NVMe support, RAID 0/1 support)			
Supported OS	Windows images and drivers supported: • Windows Server 2022 (driver only) • Windows 10 IoT Enterprise LTSC 2021 (64-bit) • Windows 11 Professional (64-bit) • Windows 11 IoT Enterprise LTSC 2024 (64-bit) Linux drivers supported: • Debian 12 (kernel 6.1) • Ubuntu 24.04 LTS (kernel 6.1) • RHEL 9 (kernel 5.14)			
Computer Interface				
Ethernet Ports	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) 2 x Auto-sensing 10/100/1000/2500 Mbps ports (RJ45 connector)	6 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) 2 x Auto-sensing 10/100/1000/2500 Mbps ports (RJ45 connector)	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) 2 x Auto-sensing 10/100/1000/2500 Mbps ports (RJ45 connector)	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) 2 x Auto-sensing 10/100/1000/2500 Mbps ports (RJ45 connector)
Serial Ports	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	10 x RS-232/422/485 ports (software-selectable, DB9 male connector)	8 x RS-232/422/485 ports (software-selectable, DB9 male connector)
CAN Ports	–	–	–	2 x CAN ports
Expansion Slots	1 x PCIe x16 (Gen 4) slot 1 x PCIe x8 (4-lane, Gen 4) slot 1 x PCIe x1 (Gen 4) slot			
USB 3.0	External: 3 x USB 3.0 hosts (type-A connector) Internal: 1 x USB 3.0 host (type-A connector)			
Digital Input	4 x DIs			
Digital Output	4 x DOs			
Audio Input/Output	1 x Mic-in, 3.5 mm audio jack 1 x Line-out, 3.5 mm audio jack			
Video Output	1 x HDMI 2.0b (type-A connector) 1 x DisplayPort 1.2			
TPM	TPM v2.0			
Power Parameters				
Input Voltage	100 to 240 VAC			
Power Consumption	90 W ¹			
Physical Characteristics				
Dimensions	440 x 360 x 88.1 mm (17.32 x 14.17 x 3.47 in)			
Weight	8,913 g (19.65 lb)	8,914 g (19.65 lb)	9,196 g (20.27 lb)	9,062 g (19.98 lb)
Installation	Rack mounting (standard 2U)			
Environmental Limits				
Operating Temperature	-30 to 60°C (-22 to 140°F) ¹			
Warranty				
Warranty Period	3 years			

¹ Without graphics card installed. When installed, refer to the graphic card's power consumption and operating temperature specifications.

x86 Computers



Product Series	MC-1100	MC-1200
Computer		
CPU	<ul style="list-style-type: none"> MC-1100-E2-T models: Intel Atom® E3826 (1M cache, 1.46 GHz) MC-1100-E4-T models: Intel Atom® E3845 (2M cache, 1.91 GHz) 	<ul style="list-style-type: none"> MC-1220-KL1-T-S models: Intel® Celeron® 3965U (2M cache, 2.20 GHz) MC-1220-KL5-T models: Intel® Core™ i5-7300U (3M cache, 3.50 GHz) MC-1220-KL5-T-S models: Intel® Core™ i5-7300U (3M cache, 3.50 GHz) MC-1220-KL7-T-S models: Intel® Core™ i7-7600U (4M cache, 3.90 GHz)
System Memory Preinstalled	4 GB DDR3L	8 GB DDR4
System Memory Slot	1 x SODIMM DDR3/DDR3L slot	2 x SODIMM DDR4 slots (32 GB max.)
Supported OS	Windows 10 IoT Enterprise LTSC 2021 (64-bit) Linux Debian 9 (Linux kernel 4.9)	
Storage Slot	All models: 1 x CFast slot MC-1111/1121 models: 1 x SD slot	External: 1 x mSATA slot, SATA 3.0 Internal: 1 x mPCIe socket
Computer Interface		
Ethernet Ports	MC-1111/1112 models: 2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) MC-1121/1122 models: 4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)
Serial Ports	MC-1121/1112 models: 2 x RS-232/422/485 ports (software-selectable, DB9 male connector) MC-1122 models: 4 x RS-232/422/485 ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)
USB 3.0	–	3 x USB 3.0 hosts (type-A connector)
USB 2.0	2 x USB 2.0 hosts (type-A connector)	–
Digital Input	MC-1121/1122 models: 4 x DIs	–
Digital Output	MC-1121/1122 models: 4 x DOs	–
Expansion Slots	1 x mPCIe slot	–
TPM	MC-1122-E4-TPM-T models: TPM v1.2	–
Video Output	All models: 1 x VGA (15-pin D-sub female connector) MC-1111/1121 models: 1 x DisplayPort	1 x HDMI Up to 3840 x 2160 @ 30 Hz
Power Parameters		
Input Voltage	11.4 to 36 VDC	9 to 36 VDC
Physical Characteristics		
Dimensions	MC-1111/1112 models: 132 x 122 x 68 mm (5.2 x 4.81 x 2.68 in) MC-1121/1122 models: 132 x 122 x 87 mm (5.2 x 4.81 x 3.43 in)	134 x 60.4 x 120 mm (5.28 x 2.38 x 4.72 in)
Installation	DIN-rail mounting Wall mounting (with optional kit)	
Environmental Limits		
Operating Temperature	-40 to 70°C (-40 to 158°F)	
Standards and Certifications		
Hazardous Locations	ATEX Zone 2, CID2, IECEx Zone 2	
Maritime	IEC 60945, DNV	–

x86 Computers



Product Series	V2403C	V2201
Computer		
CPU	<ul style="list-style-type: none"> V2403C-KL1-T models: Intel® Celeron® 3965U (2M cache, 2.2 GHz) V2403C-KL3-T models: Intel® Core™ i3-7100U (3M cache, 2.4 GHz) V2403C-KL5-T models: Intel® Core™ i5-7300U (3M cache, 2.6 GHz) V2403C-KL7-T models: Intel® Core™ i7-7600U (4M cache, 2.8 GHz) 	<ul style="list-style-type: none"> E1 models: Intel Atom® E3815 (single-core, 512K cache, 1.46 GHz) E2 models: Intel Atom® E3826 (dual-core, 1M cache, 1.46 GHz) E4 models: Intel Atom® E3845 (quad-core, 2M cache, 1.91 GHz)
Storage Slot	2 x 2.5-inch HDD/SSD, 1 x mSATA	1 x SD 3.0 (SDHC/SDXC), 1 x mSATA (16 GB mSATA preinstalled)
Supported OS	<ul style="list-style-type: none"> Windows 10 IoT Enterprise 2019 LTSC (64-bit) Windows 10 IoT Enterprise 2021 LTSC (64-bit) Linux Debian 9 (image) Linux Debian 11/Ubuntu 20.04/CentOS 7.9 (drivers) 	<ul style="list-style-type: none"> Windows 10 IoT Enterprise 2016 LTSB Entry (64-bit) Windows 10 IoT Enterprise 2019 LTSC Entry (64-bit) Windows 10 IoT Enterprise 2021 LTSC Entry (64-bit) Linux Debian 9 OS image (kernel 4.9) Linux Debian 11/Ubuntu 20.04/CentOS 7.9 (drivers)
System Memory Slot	2 x SODIMM DDR4 slots (32 GB max.)	1 x SODIMM DDR3/DDR3L slot
System Memory Preinstalled	–	4 GB DDR3L
Computer Interface		
Ethernet Ports	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)
Serial Ports	4 x RS-232/422/485 ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)
Digital Output	4 x DOs	
Digital Input	4 x DIs	
USB 3.0	4 x USB 3.0 hosts (type-A connector)	1 x USB 3.0 host (type-A connector)
USB 2.0	–	2 x USB 2.0 hosts (type-A connector)
Audio Input/Output	1 x Line-in, 1 x Line-out, 3.5 mm phone jack	–
Video Output	1 x HDMI (standard connector) 1 x DisplayPort (standard connector)	1 x HDMI (type-A connector)
Expansion Slots	2 x mPCIe slots	
Number of SIMs	4	1
SIM Format	Micro	Mini
Power Parameters		
Input Voltage	12 to 48 VDC	9 to 36 VDC
Physical Characteristics		
Dimensions (Without Ears)	250 x 75 x 150 mm (9.84 x 2.95 x 5.91 in)	150 x 48.8 x 120.2 mm (5.91 x 1.92 x 4.73 in)
Installation	Wall mounting	V2201-E4-W-T-LX models: DIN-rail mounting All other models: Wall mounting
Environmental Limits		
Operating Temperature	-40 to 70°C (-40 to 158°F)	E1/E2 models: -40 to 85°C (-40 to 185°F) E4 models: -40 to 70°C (-40 to 158°F)
Standards and Certifications		
Railway	EN 50121-4	–

Arm-based Computers



Product Series	UC-1222A	UC-2222A-T	UC-2222A-T-US	UC-2222A-T-EU	UC-2222A-T-AP
Computer					
CPU	Armv8 Cortex-A53 dual-core 1 GHz				
DRAM	2 GB DDR4				
Supported OS	Moxa Industrial Linux 3 (Debian 11, kernel 5.10) Moxa Industrial Linux 4 (Debian 13, kernel 6.12)				
Storage Preinstalled	16 GB eMMC				
Storage Slot	1 x microSD socket				
Computer Interface					
Ethernet Ports	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)				
Serial Ports	2 x RS-232/422/485 ports (software-selectable, terminal block connector)				
USB 2.0	1 x USB 2.0 host (type-A connector)				
Cellular Connectivity	–	–	Built-in LTE Cat. 4		
Wi-Fi Connectivity	–	1 x mPCIe slot for Wi-Fi 5	–		
Number of SIMs	1				
SIM Format	Nano				
TPM	TPM v2.0				
Power Parameters					
Input Voltage	12 to 24 VDC				
Input Current	0.6 A @ 12 VDC 0.3 A @ 24 VDC				
Power Consumption	7.2 W		10.5 W		
Physical Characteristics					
Dimensions	101 x 27 x 128 mm (3.98 x 1.06 x 5.04 in)	102 x 32 x 128 mm (4.20 x 1.26 x 5.04 in)			
Environmental Limits					
Operating Temperature	-40 to 60°C (-40 to 140°F)	-40 to 75°C (-40 to 167°F)	-40 to 70°C (-40 to 158°F)		
Standards and Certifications					
International Approvals	FCC, IC, CE, UL, UKCA, RCM, KC, BSMI	FCC, IC, CE, UL, UKCA, RCM, KC, BIS, BSMI	FCC, IC, UL	CE, UKCA, UL	RCM, NCC, TELEC, UL
Carrier Approvals	–		AT&T, Verizon, PTCRB	–	
Hazardous Locations	ATEX, CID2				

Arm-based Computers



Product Series	UC-3420A-T-LTE	UC-3424A-T-LTE	UC-3430A-T-LTE-WiFi	UC-3434A-T-LTE-WiFi
Computer				
CPU	Armv8 Cortex-A53 quad-core 1.4 GHz			
DRAM	4 GB DDR4			
Supported OS	Moxa Industrial Linux 3 (Debian 11, kernel 5.10) Moxa Industrial Linux 4 (Debian 13, kernel 6.12)			
Storage Preinstalled	16 GB eMMC			
Expansion Slots	1 x microSD socket			
Computer Interface				
Ethernet Ports	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)			
Serial Ports	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)			
CAN Ports	–	2 x CAN 2.0 A/B (terminal block)	–	2 x CAN 2.0 A/B (terminal block)
USB 2.0	1 x USB 2.0 host (type-A connector)			
Cellular Connectivity	Built-in LTE Cat. 4			
Wi-Fi	–		Built-in Wi-Fi 6	
Number of SIMs	2			
SIM Format	Nano			
TPM	TPM v2.0			
Power Parameters				
Input Voltage	9 to 48 VDC			
Input Current	1.09 A @ 9 VDC, 0.21 A @ 48 VDC			
Power Consumption	10.8 W (max.)			
Physical Characteristics				
Dimensions	130 x 92 x 41 mm (5.12 x 3.62 x 1.61 in)			
Environmental Limits				
Operating Temperature	-40 to 70°C (-40 to 158°F)			
Standards and Certifications				
International Approvals	CE, FCC, UL, IC, UKCA, RCM, NCC, TELEC		CE, FCC, UL, IC, UKCA, RCM, NCC	
Carrier Approvals	AT&T, Verizon, PTCRB			
Hazardous Locations	CID2, ATEX			

Arm-based Computers



Product Series	UC-4410A-T	UC-4414A-I-T	UC-4430A-T	UC-4434A-I-T	UC-4450A-T-5G	UC-4454A-T-5G
Computer						
CPU	Armv8 Cortex-A53 quad-core 1.6 GHz					
DRAM	4 GB LPDDR4					
Supported OS	Moxa Industrial Linux 3 (Debian 11, kernel 5.10) Moxa Industrial Linux 4 (Debian 13, kernel 6.12)					
Storage Preinstalled	16 GB eMMC					
Expansion Slots	1 x microSD socket					
Computer Interface						
Ethernet Ports	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)					
Serial Ports	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	4 x RS-232/422/485 ports with 2 isolated ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	4 x RS-232/422/485 ports with 2 isolated ports (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	4 x RS-232/422/485 ports (software-selectable, DB9 male connector)
CAN Ports	1 x CAN 2.0A/B (DB9 male)	2 x CAN 2.0A/B (DB9 male)	1 x CAN 2.0A/B (DB9 male)	2 x CAN 2.0A/B (DB9 male)	1 x CAN 2.0A/B (DB9 male)	2 x CAN 2.0A/B (DB9 male)
USB 2.0	1 x USB 2.0 host (type-A connector)					
Cellular Connectivity	–		1 x mPCIe slot for LTE		Built-in 5G	
Wi-Fi Connectivity	–		1 x M.2E slot for Wi-Fi 6E			
Number of SIMs	–		2			
SIM Format	–		Nano			
TPM	TPM v2.0					
Digital Input	4 x DIs					
Digital Output	4 x DOs					
Power Parameters						
Input Voltage	9 to 48 VDC					
Input Current	1.53 A @ 9 VDC, 0.21 A @ 48 VDC		2.10 A @ 9 VDC, 0.27 A @ 48 VDC (with LTE accessory)		2.13 A @ 9 VDC, 0.30 A @ 48 VDC	
Power Consumption	10 W @ 95% CPU load		13 W (with LTE accessory) @ 95% CPU load		14.4 W @ 95% CPU load	
Physical Characteristics						
Dimensions	141.5 x 120 x 41 mm (5.57 x 4.72 x 1.62 in)					
Environmental Limits						
Operating Temperature	With Wi-Fi: -30 to 70°C (-22 to 158°F) With cellular: -40 to 70°C (-40 to 158°F) Non-wireless operation: -40 to 75°C (-40 to 167°F)					
Standards and Certifications						
International Approvals	CE, FCC, UL, IC, UKCA, RCM, KC (EMC), BSMI		CE, FCC, UL, IC, UKCA, RCM, KC (EMC)		CE, FCC, UL, IC, UKCA, RCM, NCC	
Carrier Approvals	–		–		AT&T, Verizon, PTCRB	

Arm-based Computers



Product Series	UC-2101-LX	UC-2102-LX	UC-2104-LX	UC-2111-LX	UC-2112-LX	UC-2112-T-LX
Computer						
CPU	Armv7 Cortex-A8 600 MHz			Armv7 Cortex-A8 1 GHz		
DRAM	256 MB DDR3			512 MB DDR3		
Supported OS	Moxa Industrial Linux 1 (Debian 9, kernel 4.4)					
Storage Preinstalled	8 GB eMMC					
Storage Slot	-	-	-	1 x microSD socket		
Computer Interface						
Ethernet Ports	1 x Auto-sensing 10/100 Mbps port (RJ45 connector)	2 x Auto-sensing 10/100 Mbps ports (RJ45 connector)	1 x Auto-sensing 10/100 Mbps port (RJ45 connector)	2 x Auto-sensing 10/100 Mbps ports (RJ45 connector)	1 x Auto-sensing 10/100 Mbps port (RJ45 connector) 1 x Auto-sensing 10/100/1000 Mbps port (RJ45 connector)	
Serial Ports	1 x RS-232/422/485 port (software-selectable, DB9 male connector)	-	-	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)		
Wireless Connectivity	-	-	1 x mPCIe slot for Wi-Fi 5 or LTE	-	-	-
Number of SIMs	-	-	1	-	-	-
SIM Format	-	-	Standard	-	-	-
Power Parameters						
Input Voltage	9 to 48 VDC					
Input Current	0.45 A @ 9 VDC, 0.084 A @ 48 VDC					
Power Consumption	4 W					
Physical Characteristics						
Dimensions (With Ears)	73 x 80 x 28 mm (2.87 x 3.15 x 1.10 in)	80 x 80 x 30.8 mm (3.15 x 3.15 x 1.21 in)	99 x 111 x 25.5 mm (3.90 x 4.37 x 1.00 in)			
Dimensions (Without Ears)	50 x 80 x 28 mm (1.97 x 3.15 x 1.10 in)	57 x 80 x 30.8 mm (2.24 x 3.15 x 1.21 in)	77 x 111 x 25.5 mm (3.03 x 4.37 x 1.00 in)			
Environmental Limits						
Operating Temperature	-10 to 60°C (14 to 140°F)					-40 to 75°C (-40 to 167°F)
Standards and Certifications						
International Approvals	CE, FCC, UL, IC, UKCA, RCM, BIS					
Hazardous Locations	-	-	-	-	ATEX, CID2	

Arm-based Computers



Product Series	UC-3101-T-(EU/AP/US)-LX	UC-3111-T-(EU/AP/US)-LX	UC-3121-T-(EU/AP/US)-LX	UC-8210-T-LX-S	UC-8220-T-LX	UC-8220-T-LX-US-S	UC-8220-T-LX-EU-S	UC-8220-T-LX-AP-S
Computer								
CPU	Armv7 Cortex-A8 1 GHz			Armv7 Cortex-A7 dual-core 1 GHz				
DRAM	1 GB DDR3			2 GB DDR3L				
Supported OS	Moxa Industrial Linux 1 (Debian 9, kernel 4.4)			Moxa Industrial Linux 1 (Debian 9, kernel 4.4) Moxa Industrial Linux 3 (Debian 11, kernel 5.10)				
Storage Preinstalled	8 GB eMMC							
Storage Slot	-	1 x SD socket		1 x microSD socket				
Computer Interface								
Ethernet Ports	2 x Auto-sensing 10/100 Mbps ports (RJ45 connector)			2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)				
Serial Ports	1 x RS-232/422/485 port (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	1 x RS-232/422/485 port (software-selectable, DB9 male connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)				
CAN Ports	-	1 x CAN 2.0A/B (DB9 male)		1 x CAN 2.0A/B (DB9 male)				
USB 2.0	1 x USB 2.0 host (type-A connector)							
Expansion Slots	-			2 x mPCIe slots		1 x mPCIe slot		
Cellular Connectivity	Built-in LTE Cat. 1			-		Built-in LTE Cat. 4		
Wi-Fi Connectivity	-	Built-in Wi-Fi 4 (except -NW models)	Built-in Wi-Fi 4	-	Wi-Fi 5 (optional)			
Number of SIMs	2			-		2		
SIM Format	Nano			-		Nano		
TPM	TPM v2.0							
Digital Input	-			-		4 x DIs		
Digital Output	-			-		4 x DOs		
Power Parameters								
Input Voltage	9 to 36 VDC			-		12 to 48 VDC		
Input Current	0.75 A @ 9 VDC, 0.18 A @ 36 VDC	0.87 A @ 9 VDC, 0.21 A @ 36 VDC	0.83 A @ 9 VDC, 0.21 A @ 36 VDC	-		0.8 A @ 12 VDC		
Power Consumption	6.75 W	7.83 W	7.56 W	10 W				
Physical Characteristics								
Dimensions	128.5 x 89.1 x 26 mm (5.06 x 3.51 x 1.02 in)	128.5 x 89.1 x 41 mm (5.06 x 3.51 x 1.61 in)	141.5 x 120 x 27 mm (5.7 x 4.72 x 1.06 in)	141.5 x 120 x 39 mm (5.7 x 4.72 x 1.54 in)				
Environmental Limits								
Operating Temperature	-40 to 70°C (-40 to 158°F)							
Standards and Certifications								
International Approvals	-US models: FCC, IC, UL -EU models: CE, UKCA, UL -AP models: RCM, UL, TELEC	-US models: FCC, IC, UL, IFETEL, SUBTEL -EU models: CE, UKCA, UL, NBTC, WPC -AP models: RCM, UL, TELEC	-US models: FCC, IC, UL -EU models: CE, UKCA, UL -AP models: RCM, UL, TELEC	CE, FCC, IC, UL, UKCA, RCM, KC, BIS	CE, FCC, IC, UKCA, RCM, KC, UL, BIS	FCC, IC, UL	CE, UKCA, UL, BIS	RCM, NCC, TELEC, UL
Carrier Approvals	-US models: Verizon, AT&T, PTCRB			-		Verizon, AT&T, PTCRB		-
Hazardous Locations	ATEX, CID2, IECEx			-		ATEX, CID2		
Cybersecurity	-			-		IEC 62443-4-2 Security Level 2		

Arm-based Computers



Product Series	UC-8131-LX	UC-8132-LX	UC-8162-LX	UC-8112-LX
Computer				
CPU	Armv7 Cortex-A8 300 MHz		Armv7 Cortex-A8 600 MHz	Armv7 Cortex-A8 1 GHz
DRAM	256 MB DDR3		512 MB DDR3	
Supported OS	Moxa Industrial Linux 1 (Debian 9, kernel 4.4)			
Storage Preinstalled	8 GB eMMC			
Storage Slot	1 x SD socket			
Computer Interface				
Ethernet Ports	2 x Auto-sensing 10/100 Mbps ports (RJ45 connector)			
Serial Ports	1 x RS-232/422/485 port (software-selectable, terminal block connector)	2 x RS-232/422/485 ports (software-selectable, terminal block connector)		
USB 2.0	1 x USB 2.0 host (type-A connector)			
Wireless Connectivity	1 x mPCIe slot for Wi-Fi 5 or LTE			
Number of SIMs	1			
SIM Format	Mini			
Power Parameters				
Input Voltage	12 to 24 VDC			
Input Current	0.48 A @ 12 VDC 0.225 A @ 24 VDC			
Power Consumption	5.4 W			
Physical Characteristics				
Dimensions	101 x 27 x 128 mm (3.98 x 1.06 x 5.04 in)			
Environmental Limits				
Operating Temperature	-10 to 60°C (14 to 140°F)			
Standards and Certifications				
International Approvals	CE, FCC, IC, UL, UKCA, RCM, BIS		CE, FCC, IC, UL, UKCA, RCM, BIS, BSMI	

Arm-based Computers



Product Series	UC-8410A-LX	UC-5101-LX	UC-5102-LX	UC-5111-LX	UC-5112-LX
Computer					
CPU	Armv7 Cortex-A7 dual-core 1 GHz	Armv7 Cortex-A8 1 GHz			
DRAM	1 GB DDR3L	512 MB DDR3			
Supported OS	Linux Debian 8 (kernel 4.1) Moxa Industrial Linux 1 (Debian 9, kernel 4.4)	Moxa Industrial Linux 1 (Debian 9, kernel 4.4)			
Storage Preinstalled	8 GB eMMC				
Storage Slot	1 x SD socket 1 x mSATA slot, internal mPCIe socket	1 x SD socket			
Computer Interface					
Ethernet Ports	3 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	2 x Auto-sensing 10/100 Mbps ports (RJ45 connector)			
Serial Ports	8 x RS-232/422/485 ports (software-selectable, RJ45 connector)	4 x RS-232/422/485 ports (software-selectable, RJ45 connector)			
CAN Ports	–	–	–	2 (RJ45 connector)	2 (RJ45 connector)
USB 2.0	2 x USB 2.0 hosts (type-A connector)	1 x USB 2.0 host (type-A connector)			
Wireless Connectivity	1 x mPCIe slot for Wi-Fi 4 or LTE (excluding -NW models)	–	1 x mPCIe slot for Wi-Fi 5 or LTE	–	1 x mPCIe slot for Wi-Fi 5 or LTE
Number of SIMs	1	–	2	–	2
SIM Format	Mini	–	Micro	–	Micro
Digital Input	4 x DIs				
Digital Output	4 x DOs				
Power Parameters					
Input Voltage	12 to 48 VDC	9 to 48 VDC			
Input Current	1.57 A @ 12 VDC	0.95 A @ 9 VDC, 0.23 A @ 48 VDC			
Power Consumption	19 W	11 W			
Physical Characteristics					
Dimensions	200 x 120 x 48.6 mm (7.87 x 4.72 x 1.91 in)	57 x 136 x 100 mm (2.24 x 5.35 x 3.94 in)			
Environmental Limits					
Operating Temperature	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F) Wide temp. models with LTE/Wi-Fi: -40 to 70°C (-40 to 158°F)	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -40 to 85°C (-40 to 185°F) Wide temp. models with LTE/Wi-Fi: -40 to 70°C (-40 to 158°F)			
Standards and Certifications					
International Approvals	CE, FCC, IC, UL, UKCA, RCM				

Arm-based Computers



Product Series	UC-8620A-T	UC-8630A-T
Computer		
CPU	Arm Cortex-A72 (dual-core, 1.5 GHz)	
DRAM	4 GB LPDDR4	
Supported OS	Moxa Industrial Linux 4 (Debian 13, kernel 6.12)	
Storage Preinstalled	32 GB eMMC	
Storage Slot	1 x microSD socket 1 x M.2 M-key socket	
Computer Interface		
Ethernet Ports	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	
Serial Ports	8 x RS-232/422/485 ports (software-selectable, terminal block)	
CAN Ports	2 x CAN 2.0A/B (terminal block)	
USB	2 x USB 3.0 hosts (type-A connector)	
Cellular Connectivity	1 x mPCIe slot for LTE	
Wi-Fi Connectivity	–	1 x M.2 E-key slot for Wi-Fi 6E
Number of SIMs	2	
SIM Format	Nano	
Digital Input	4 x DIs	
Digital Output	4 x DOs	
Power Parameters		
Input Voltage	12 to 48 VDC	
Input Current	1.34 A @ 12 VDC, 0.38 A @ 48 VDC	1.58 A @ 12 VDC, 0.43 A @ 48 VDC
Power Consumption	13.44 W, 1.34 A @ 12 VDC 15.36 W, 0.38 A @ 48 VDC	15.84 W, 1.58 A @ 12 VDC 17.28 W, 0.43 A @ 48 VDC
Physical Characteristics		
Dimensions	200 x 120 x 40.5 mm (7.87 x 4.72 x 1.59 in)	
Operating Temperature	Without wireless and M.2M SSD: -40 to 75°C (-40 to 167°F) With Wi-Fi: -30 to 70°C (-22 to 158°F) With cellular: -40 to 70°C (-40 to 158°F) With cellular and Wi-Fi: -30 to 65°C (-22 to 149°F)	
International Approvals	CE, FCC, ISED, UKCA, RCM, KC, UL	

EN 50155 Computers



Product Series	V1200	V2406C	V3200	V3400
Computer				
CPU	• Armv8 Cortex-A53 quad-core 64-bit 1.6 GHz	• KL1 models: Intel® Celeron® 3965U • KL3 models: Intel® Core™ i3-7100U • KL5 models: Intel® Core™ i5-7300U • KL7 models: Intel® Core™ i7-7600U • WL1 models: Intel® Celeron® 4305UE • WL3 models: Intel® Core™ i3-8145UE • WL5 models: Intel® Core™ i5-8365UE • WL7 models: Intel® Core™ i7-8665UE	• TL1 models: Intel® Celeron® 6305E • TL3 models: Intel® Core™ i3-1115G4E • TL5 models: Intel® Core™ i5-1145G7E • TL7 models: Intel® Core™ i7-1185G7E • TL7-TSN models: Intel® Core™ i7-1185GRE	• TL3 models: Intel® Core™ i3-1115G4E • TL7 models: Intel® Core™ i7-1185G7E
System Memory Slot	–	2 x SODIMM DDR4 slots (32 GB max.)	2 x SODIMM DDR4 slots (64 GB max.)	2 x SODIMM DDR4 slots (64 GB max.)
System Memory Preinstalled	4 GB DDR4	–	16 GB DDR4	16 GB DDR4
Storage Slot	1 x microSD slot	2 x 2.5-inch hot-swappable SSD/HDD slots 1 x mSATA slot	2 x 2.5-inch SSD/HDD slots 1 x M.2 M-key 2280 slot (NVMe)	2 x 2.5-inch hot-swappable SSD/HDD slots 1 x M.2 M-key 2280 slot (NVMe)
Supported OS	Linux Debian 11 (Linux kernel v5.10)	Windows 10 IoT Enterprise 2019 LTSC (64-bit) Windows 10 IoT Enterprise 2021 LTSC (64-bit) WL models: Moxa Industrial Linux 2.x (Debian 10, kernel 4.19), Windows 11 IoT Enterprise LTSC 24H2 64-bit KL models: Debian 9 (kernel 4.9) Linux drivers supported: Debian 11, Ubuntu 20.04, CentOS 7.9	Windows 10 IoT Enterprise LTSC 2021 64-bit Moxa Industrial Linux 3 (Debian 11, kernel 5.10), 2031 EOL Linux drivers supported: Debian 12 Ubuntu 22.04 LTS (HWE)	Windows 10 IoT Enterprise LTSC 2021 64-bit Windows 11 IoT Enterprise LTSC 24H2 64-bit Moxa Industrial Linux 3 (Debian 11, kernel 5.10), 2031 EOL Linux drivers supported: Debian 12 Ubuntu 22.04 LTS (HWE)
Storage Preinstalled	16 GB eMMC	–	128 GB M.2 M-key SSD	128 GB M.2 M-key SSD
Wireless Function				
Wireless Module	V1222-CT-T: Optional accessories (5G, LTE, Wi-Fi 6) V1222-W-CT-T: 1 x Built-in 5G module (M.2 B-key 3052 slot), 1 x Built-in Wi-Fi 6 module (M.2 E-key slot)	Optional accessories (LTE, Wi-Fi 5)	Optional accessories (LTE, Wi-Fi 5, Wi-Fi 6)	1 x Built-in 5G module (M.2 B-key 3052 slot), 1 x Built-in Wi-Fi 6 module (M.2 E-key slot), Optional accessories (5G, LTE, Wi-Fi 5, Wi-Fi 6)
Computer Interface				
Ethernet Ports	2 x Auto-sensing 10/100/1000 Mbps ports (M12 X-coded connector)		4-port models: 1 x Auto-sensing 1000/2500 Mbps port 3 x Auto-sensing 10/100/1000 Mbps ports (M12 X-coded connector) 8-port models: 1 x Auto-sensing 1000/2500 Mbps port 7 x Auto-sensing 10/100/1000 Mbps ports (M12 X-coded connector)	
Serial Ports	V1222 models: 2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	4 x RS-232/422/485 ports (software-selectable, DB9 male connector)		2 x RS-232/422/485 ports (software-selectable, DB9 male connector)
Digital Input	–	6 x DIs	2 x DIs	
Digital Output	–	2 x DOs	2 x DOs	
USB	1 x USB 2.0 host (type-A connector)	4 x USB 3.0 hosts (type-A connector)	2 x USB 3.0 hosts (type-A connector)	
Video Output	–	1 x VGA (15-pin D-sub female connector) 1 x HDMI (type-A connector)		
Audio Input/Output	–	1 x Line-in, 1 x Line-out, 3.5 mm phone jack	–	–
Expansion Slots	V1222-CT-T: 1 x M.2 B key slot, 1 x M.2 E key slot, 1 x mPCIe slot	2 x mPCIe slots		2 x M.2 B key 3052/3050 slots 1 x M.2 E key slot, 1 x mPCIe slot
Number of SIMs	2 (nano)	–	6 (micro)	6 (nano)
TPM	TPM v2.0	TPM 2.0 (sold separately)		TPM v2.0 (default)
Power Parameters				
Input Voltage	24 to 110 VDC			
Power Connector	M12 K-coded 5-pin male connector	M12 A-coded male connector		
Physical Characteristics				
Dimensions (Without Ears)	V1202 models: 150 x 41 x 120 mm (5.90 x 1.61 x 4.72 in) V1222 models: 150 x 50 x 120 mm (5.90 x 1.97 x 4.72 in)	250 x 75 x 150 mm (9.84 x 2.95 x 5.91 in)	250 x 96.7 x 180 mm (9.84 x 3.81 x 7.09 in)	250 x 106.7 x 180 mm (9.84 x 4.20 x 7.09 in)
Installation	Wall mounting, DIN-rail mounting, Desk mounting	Wall mounting		
Environmental Limits				
Operating Temperature	-40 to 70°C (-40 to 158°F)			-40 to 70°C (-40 to 158°F) (with wireless module)
Standards and Certifications				
International Approvals	CE, FCC, UL, UKCA			
Railway	EN 50121-4, EN 50121-3-2, EN 50155, EN 45545-2			

IEC 61850-3 Computers



Product Series	DA-680	DA-681C	DA-720	DA-682C
Computer				
CPU	• Intel® Core™ i3-8145UE	• Intel® Core™ i3-7100U • Intel® Celeron® 3965U	• Intel® Core™ i7-6600U • Intel® Core™ i5-6300U	• Intel® Core™ i7-7600U • Intel® Core™ i5-7300U • Intel® Core™ i3-7100U • Intel® Celeron® 3965U
System Memory Slot	1 x SODIMM DDR4 slot (32 GB max.)	2 x SODIMM DDR4 slots (32 GB max.)		
Storage Slot	1 x 2.5-inch SSD slot 1 x mSATA slot		2 x 2.5-inch SSD slots 1 x mSATA slot	
Supported OS	• Windows 10 IoT Enterprise LTSC 2021 Linux SDK supported: • Debian 12 • Ubuntu 22.04.3 LTS	• Windows 10 IoT Enterprise LTSC 2019 • Windows 10 IoT Enterprise LTSC 2021 Linux SDK supported: • Debian 12 • Ubuntu 22.04.3 LTS	• Windows 10 IoT Enterprise LTSC 2021 Linux SDK supported: • Debian 8	• Windows 10 IoT Enterprise LTSC 2019 • Windows 10 IoT Enterprise LTSC 2021 Linux SDK supported: • Debian 12 • Ubuntu 22.04.3 LTS
Computer Interface				
Ethernet Ports	8 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	6 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	14 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	6 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)
USB 3.0	3 x USB 3.0 hosts (type-A connector, rear)		2 x USB 3.0 hosts (type-A connector, rear)	3 x USB 3.0 hosts (type-A connector, rear)
USB 2.0	3 x USB 2.0 hosts (type-A connector) 2 ports on the front panel, 1 port inside the computer		2 x USB 2.0 hosts (type-A connector, front)	3 x USB 2.0 hosts (type-A connector) 2 ports on the front panel, 1 port inside the computer
Video Output	1 x VGA (15-pin D-sub female connector)	2 x HDMI (type-A connector)	1 x DVI-D (29-pin DVI-D female connector) 1 x VGA (15-pin D-sub female connector)	2 x HDMI (type-A connector)
TPM	TPM v2.0			TPM v2.0 (on request)
Serial Ports	8/16 x 2-wire RS-485/4-wire RS-485 ports (terminal block connector)	2 x RS-232/422/485 ports (software-selectable, DB9 male connector) 10 x 2-wire RS-485 ports (terminal block connector)	2 x RS-232/422/485 ports (software-selectable, terminal block connector)	
Expansion Slots	-		3 x Proprietary PCIe slots	2 x Proprietary PCIe slots
Digital Input	-	6 x DIs	-	6 x DIs
Digital Output	2 x DOs		-	2 x DOs
Power Parameters				
Input Voltage	100 to 240 VAC, 100 to 240 VDC			
Redundant Power Supply	-HH models	-HH models	-DPP models	-HH models
Hot-swappable Power Supply	-	-	-	-
Physical Characteristics				
Dimensions (Without Ears)	440 x 335.5 x 44 mm (17.32 x 13.21 x 1.73 in)	440 x 316 x 44 mm (17.32 x 12.44 x 1.73 in)	440 x 301 x 90 mm (17.32 x 12.20 x 3.54 in)	440 x 282 x 88 mm (17.32 x 11.08 x 3.46 in)
Weight	4,659.5 g (10.27 lb)	9,000 g (21.82 lb)	6,500 g (14.33 lb)	9,900 g (21.82 lb)
Installation	19-inch rack mounting			
Environmental Limits				
Operating Temperature	-25 to 55°C (-13 to 131°F)	-40 to 70°C (-40 to 158°F)	-25 to 55°C (-13 to 131°F)	-40 to 70°C (-40 to 158°F)
Standards and Certifications				
Certifications	CE, FCC, UL 62368-1, IEC 62368-1, IEC 61850-3, IEEE 1613, IEC 60255	CE, FCC, UL 62368-1, IEC 62368-1, IEC 61850-3, IEEE 1613, IEC 60255, EN 50121-4		
Substation Features				
PRP/HSR	-	-	With an expansion module	
MMS	-	-	With an expansion module (Q4, 2027)	
Time Synchronization	IRIG-B (terminal block)	-	-	-

IEC 61850-3 Computers

Preliminary



Product Series	DA-820C	DA-820E	DA-920E
Computer			
CPU	• Intel® Xeon® E3-1505M v6 • Intel® Xeon® E3-1505L v6 • Intel® Core™ i7-7820EQ • Intel® Core™ i5-7442EQ • Intel® Core™ i3-7102E	• Intel® Core™ i3-1320PE • Intel® Core™ i5-1340PE • Intel® Core™ i7-1370PE	• Intel® Xeon® D-1834
System Memory Slot	2 x SODIMM DDR4 slots (64 GB max.)	2 x SODIMM DDR4 slots (64 GB max.)	4 x RDIMM DDR4 slots (256 GB max.)
Storage Slot	4 x 2.5-inch SSD slots 1 x mSATA slot	4 x 2.5-inch SSD slots 1 x M.2 M-key 2280 slot (NVMe PCIe Gen.4 x4)	4 x 2.5-inch SSD slots 1 x M.2 M-key 2280 slot (NVMe PCIe Gen. 3 x2)
Supported OS	• Windows 10 IoT Enterprise LTSC 2019 • Windows 10 IoT Enterprise LTSC 2021 • Windows Server 2019 • Windows Server 2022 Linux SDK supported: • Debian 12 • Ubuntu 22.04.3 LTS • RHEL 9	• Windows 10 IoT Enterprise LTSC 2021 • Windows 11 IoT Enterprise LTSC 2024 • Windows Server 2022 • Windows Server 2025 Linux SDK supported: • Debian 12 • Ubuntu 22.04.3 LTS • RHEL 9.4	• Windows Server 2022 • Windows Server 2025 Linux SDK supported: • Debian 13 • Ubuntu 22.04 LTS • Ubuntu 24.04 LTS • RHEL 9
Out-of-band Management	Intel® AMT ¹		BMC
Computer Interface			
Ethernet Ports	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)		1 x Auto-sensing 10/100/1000 Mbps port (RJ45 connector) 3 x Auto-sensing 10/100/1000/2500 Mbps ports (RJ45 connector) 1 x Dedicated Management LAN auto-sensing 10/100/1000 Mbps port (RJ45 connector)
USB 3.0	3 x USB 3.0 hosts (type-A connector, rear)		2 x USB 3.0 hosts (type-A connector, rear) 2 x USB 3.0 hosts (type-A connector, front) 1 x USB 3.0 host (type-A connector, internal)
USB 2.0	3 x USB 2.0 hosts (type-A connector) 2 ports on the front panel, 1 port inside the computer		-
Video Output	2 x HDMI (type-A connector) 1 x VGA (15-pin D-sub female connector)		1 x HDMI (type-A connector) 1 x DisplayPort
TPM	TPM v2.0		
Serial Ports	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)		2 x RS-232/422/485 ports (software-selectable, terminal block)
Expansion Slots	1 x PCIe x16 slot 1 x PCIe x4 slot 2 x PCIe x1 slots 1 x Proprietary PCIe slot	1 x PCIe x8 (4-lane) slot 3 x PCIe x1 slots 1 x Proprietary PCIe slot	1 x PCIe x16 slot 1 x PCIe x8 slot 1 x PCIe x4 (2-lane) slot
Digital Input	6 x DIs		-
Digital Output	2 x DOs		-
Power Parameters			
Input Voltage	100 to 240 VAC, 100 to 240 VDC	100 to 240 VAC/VDC, 48 VDC	100 to 240 VAC/VDC, 24 to 110 VDC
Redundant Power Supply	-HH models	-HH, -LL models	-HH, -WW, -HW models
Hot-swappable Power Supply	-	Yes	Yes
Physical Characteristics			
Dimensions (Without Ears)	440 x 281.4 x 132.8 mm (17.32 x 11.1 x 5.2 in)	440 x 301 x 132.55 mm (17.32 x 11.85 x 5.22 in)	440 x 330 x 88 mm (17.32 x 12.99 x 3.46 in)
Weight	14,000 g (31.11 lb)	11,860 g (26.15 lb)	9,530 g (20.99 lb)
Installation	19-inch rack mounting		
Environmental Limits			
Operating Temperature	Standard models: -25 to 55°C (-13 to 131°F) Wide temp. models: -40 to 70°C (-40 to 158°F)	-40 to 70°C (-40 to 158°F)	-25 to 55°C (-13 to 131°F)
Standards and Certifications			
Certifications	CE, FCC, UL 62368-1, IEC 62368-1, IEC 61850-3, IEEE 1613, IEC 60255, EN 50121-4	CE, FCC, UL 62368-1, IEC 62368-1, IEC 61850-3, IEEE 1613, IEC 60255, EN 50121-4, BSMI	
Substation Features			
PRP/HSR	With an expansion module		With an expansion module (Q4, 2027)
MMS	IEC 61850-90-4 MMS Server for power SCADA IEC 61850-90-4 MMS ICD file	-	IEC 61850-90-4 MMS Server for power SCADA IEC 61850-90-4 MMS ICD file
Time Synchronization	PTP, IRIG-B (with an expansion module)	-	PTP, IRIG-B (with an expansion module: Q1, 2027)

¹ Intel® AMT is not supported by models using Intel® Core™ i3 CPUs.

IIoT Gateways



Product Series	AIG-302	AIG-502
Computer		
CPU	Armv7 Cortex-A7 (dual-core, 1 GHz)	Intel®Core™ i7-7600U processor (4M cache, up to 3.90 GHz)
DRAM	2 GB DDR3L	32 GB SODIMM DDR4
Storage Preinstalled	32 GB eMMC	32 GB mSATA
OS Preinstalled	Moxa Industrial Linux (Debian 11, kernel 5.10.x)	
No. of Tags Supported	3000	3,000+ (≥ 30% system resources remaining)
Graphics Controller	–	Intel® HD Graphics 620
Computer Interface		
Wi-Fi Antenna Connectors	2 x RP-SMA (excluding AIG-302-T-AZU-LX models)	2 x RP-SMA (excluding AIG-502-T-AZU-LX models)
Digital Input	4 x DIs	–
Digital Output	4 x DOs	–
Cellular Interface		
Cellular Standards	LTE Cat. 4	
Cellular Antenna Connectors	2 x SMA (excluding AIG-302-T-AZU-LX models)	2 x SMA (excluding AIG-502-T-AZU-LX models)
Number of SIMs	2	
SIM Format	Nano	
GPS Antenna Connectors	1 x SMA (excluding AIG-302-T-AZU-LX models)	1 x SMA (excluding AIG-502-T-AZU-LX models)
Ethernet Interface		
10/100/1000BaseT(X) Ports (RJ45 Connector)	2	
Ethernet Software Features		
Industrial Protocols	Modbus TCP Client (Master), Modbus TCP Server (Slave), Generic MQTT, Azure IoT Device, Azure IoT Edge, AWS IoT Core, Sparkplug B Client	Modbus TCP Client (Master), Azure IoT Edge
Configuration Options	Web Console (HTTP/HTTPS), AIG QuickON	
Time Management	NTP Client, GPS	
Serial Interface		
No. of Ports	2	
Serial Software Features		
Industrial Protocols	Modbus RTU/ ASCII Client (Master)	
CAN Interface		
No. of Ports	1	–
Connector	DB9 male	–
Environmental Limits		
Operating Temperature	-40 to 70°C (-40 to 158°F)	
Standards and Certifications		
International Approvals	CE, FCC, UL, NCC, KC, TELEC, BSMI, RCM	CE, FCC, UL, NCC, BSMI, RCM
Carrier Approvals	AT&T, Verizon, PTCRB	
Hazardous Locations	CID2, ATEX (excluding AIG-302-T-AP-AZU-LX models)	CID2, ATEX, IECEx
Warranty		
Warranty Period	5 years	3 years

Panel PCs



Product Series	EXPC-F2120W	EXPC-F2150W
Computer		
CPU	TL1 models: Intel® Celeron® 6305E TL3 models: Intel® Core™ i3-1115G4E TL7 models: Intel® Core™ i7-1185G7E	TL3 models: Intel® Core™ i3-1115G4E TL5 models: Intel® Core™ i5-1145G7E TL7 models: Intel® Core™ i7-1185G7E
Graphics Controller	Intel® Core™ i7 models: Intel® Iris® Xe Graphics Intel® Celeron®, Core™ i3 models: Intel® UHD Graphics	Intel® Core™ i7 models: Intel® Iris® Xe Graphics Intel® Core™ i5/i3 models: Intel® UHD Graphics
System Memory Preinstalled	16 GB	
System Memory Slot	2 x SODIMM DDR4 slots (64 GB max.)	
Supported OS	Windows 10 IoT Enterprise LTSC 2021 (64-bit), Windows 11 Professional 2023 (64-bit), Debian 11 (driver)	
Storage Slot	1 x M.2 B-key for SSD (internal, optional) 1 x CFexpress slot (external, default)	
Computer Interface		
Ethernet Ports	4 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	
Serial Ports	3 x RS-232/422/485 ports (software-selectable, DB9 male connector)	
USB 3.0	2 x USB 3.0 hosts (type-A connector)	
USB 2.0	2 x USB 2.0 hosts (type-A connector)	
Audio Input/Output	1 x Mic-in, 1 x Line-out, 3.5 mm phone jack	
Video Output	1 x DisplayPort 1 x VGA (15-pin D-sub female connector)	
Display		
Active Display Area	304.128 (H) x 228.096 (V) mm	344.16 (H) x 193.59 (V) mm
Aspect Ratio	16:10	16:9
Contrast Ratio	750:1	
Light Intensity (Brightness)	1200 nits	
Panel Size	12.1 in	15.6 in
Pixels	1280 x 800	1920 x 1080
Viewing Angles	Horizontal: 85°/85°, Vertical: 85°/85°	Horizontal: 88°/88°, Vertical: 88°/88°
Touch Function		
Touch Type	Projective capacitive (PCAP) touchscreen GGG sensor with optical bonding	
Glove Support	Yes	
Power Parameters		
Input Voltage	DC models: 9 to 36 VDC AC models: 100 to 240 VAC	
Physical Characteristics		
Housing	Aluminum	
IP Rating	IP66 (front), IP42 (rear; with all I/Os plugged in)	
Dimensions	336.69 x 255.17 x 94.05 mm (13.25 x 10.05 x 3.70 in)	403.99 x 274.48 x 99 mm (15.91 x 10.81 x 3.90 in)
Weight	6,200 g (13.67 lb)	6,900 g (15.21 lb)
Environmental Limits		
Operating Temperature	-40 to 70°C (-40 to 158°F)	
Storage Temperature (Package Included)	-45 to 75°C (-49 to 167°F)	
Ambient Relative Humidity	5 to 95% (non-condensing)	
Altitude	3000 m	
Standards and Certifications		
Hazardous Locations	EN 60079-0, IEC 60079-0, EN 60079-7, IEC 60079-7, EN 60079-15, IEC 60079-15, EN 60079-31, IEC 60079-31	
UV Protection	IEC 60068-2-5 CIE85: 300 to 3000 nm (included UV, visible, IR); 1000 hrs (procedure C; continuously for 24 hrs)	
Warranty		
Warranty Period	LCD: 1 year, System: 3 years	

Panel PCs



Product Series	MPC-2120	MPC-2101	MPC-2121
Computer			
CPU	E2-T models: Intel Atom® E3826 (1M cache, 1.46 GHz) E4-T models: Intel Atom® E3845 (2M cache, 1.91 GHz)	Intel Atom® E3845 (2M cache, 1.91 GHz)	
Graphics Controller	Intel® HD Graphics		
System Memory Preinstalled	4 GB DDR3L		
System Memory Slot	1 x SODIMM DDR3/DDR3L slot (8 GB max.)		
Supported OS	Windows 10 IoT Enterprise LTSC 2019 Value (64-bit) Windows 10 IoT Enterprise LTSC 2021 Entry (64-bit) Linux Debian 9		
Storage Slot	1 x CFast, 1 x SD (SD 3.0, SDHC/SDXC socket)		
Computer Interface			
Ethernet Ports	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	2 x Auto-sensing 10/100 Mbps ports (M12 D-coded 4-pin connector)	
Serial Ports	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)	1 x RS-232/422/485 port (M12 A-coded 12-pin connector)	
USB 2.0	2 x USB 2.0 hosts (type-A connector)	1 x USB 2.0 host (M12 A-coded 5-pin connector)	
Display			
Active Display Area	245.76 (H) x 184.32 (V) mm	210.4 (H) x 157.8 (V) mm	245.76 (H) x 184.32 (V) mm
Aspect Ratio	4:3		
Contrast Ratio	700:1	1000:1	
Light Intensity (Brightness)	500 / 1000 nits		
Panel Size	12 in	10.4 in	12 in
Pixels	1024 x 768		
Viewing Angles	160°/140°	176°/176°	178°/178°
Touch Function			
Touch Type	Projective capacitive (PCAP) touchscreen		
Glove Support	Yes		
Power Parameters			
Input Voltage	10 to 36 VDC	24 to 110 VDC	
Physical Characteristics			
Housing	Metal		
IP Rating	IP66 (front), IP20 (rear)	IP66	
Dimensions	306 x 245 x 64 mm (12 x 9.6 x 2.5 in)	256.9 x 214.4 x 58.9 mm (10.11 x 8.44 x 2.32 in)	297 x 248 x 59 mm (11.69 x 9.76 x 2.32 in)
Weight	2,640 g (5.82 lb)	2,080 g (4.59 lb)	2,850 g (6.28 lb)
Environmental Limits			
Operating Temperature	-40 to 70°C (-40 to 158°F)		
Storage Temperature (Package Included)	-40 to 70°C (-40 to 158°F)		
Ambient Relative Humidity	5 to 95% (non-condensing)		
Hazardous Locations	CID2, ATEX Zone 2, IECEx Zone 2	-	
Maritime	DNV-CG-0339, IEC 60945, IACS E10	-	
Railway	-	EN 50155	
Warranty			
Warranty Period	LCD: 1 year, System: 3 years		

Panel PCs



Product Series	MPC-3070W	MPC-3100	MPC-3120	MPC-3120W	MPC-3150	MPC-3150W	MPC-3101	MPC-3121
Computer								
CPU	E2 models: Intel Atom® x6211E Elkhart Lake (dual-core, 1.30 GHz) E4 models: Intel Atom® x6425E Elkhart Lake (quad-core, 2.0 GHz)						Intel Atom® x6425E Elkhart Lake (quad-core, 2.0 GHz)	
System Memory Preinstalled	8 GB DDR4-2400 (32 GB max.)							
Supported OS	Windows 10 IoT Enterprise LTSC 2021 (64-bit), Windows 11 Professional (64-bit) Debian 11 (kernel 5.10) Ubuntu 22.04 LTS (kernel 5.1x), RHEL 9 (kernel 5.14)						Windows 10 IoT Enterprise LTSC 2021 (64-bit), Windows 11 Professional (64-bit), Windows 11 IoT Enterprise LTSC 2024, Debian 12 (kernel 6.1), Ubuntu 24.04 LTS (kernel 6.1)	
Storage Slot	1 x CFast, 1 x SD						1 x CFast, 1 x M.2 M-key 2242	
Expansion Slot	-						1 x mPCIe	
Speaker	-						SPK models: 1 x 2 W speaker	
Computer Interface								
Ethernet Ports	2 x Auto-sensing 10/100/1000 Mbps ports (RJ45 connector)						2 x Auto-sensing 10/100/1000 Mbps ports (M12 X-coded connector)	
Serial Ports	2 x RS-232/422/485 ports (software-selectable, DB9 male connector)						1 x RS-232/422/485 port (software-selectable, M12 A-coded 12-pin connector)	
USB	2 x USB 3.0 hosts (type-A connector)						1 x USB 2.0 host (M12 A-coded 5-pin connector)	
Digital Input	4 x DIs (with isolation protection)						4 x DIs (M12 A-coded 8-pin connector)	
Digital Output	4 x DOs (with isolation protection)						2 x DOs (M12 A-coded 8-pin connector)	
Video Output	1 x HDMI 1.2a (type-A connector)						-	
Audio Output	-						1 x SPK out/Line out (M12 A-coded 8-pin connector)	
TPM	TPM v2.0							
Display								
Active Display Area	152.4 (H) x 91.44 (V) mm	210.4 (H) x 157.8 (V) mm	245.76 (H) x 184.32 (V) mm	261.12 (H) x 163.20 (V) mm	304.1 (H) x 228.1 (V) mm	344.16 (H) x 193.59 (V) mm	210.4 (H) x 157.8 (V) mm	245.8 (H) x 184.3 (V) mm
Aspect Ratio	5:3	4:3	4:3	16:10	4:3	16:9	4:3	4:3
Contrast Ratio	800:1	1000:1	1000:1	1000:1	3000:1	800:1	1000:1	1000:1
Light Intensity (Brightness)	400 / 1000 nits						500 / 1000 nits	
Panel Size	7 in	10.4 in	12.1 in	12.1 in	15 in	15.6 in	10.4 in	12.1 in
Pixels	800 x 480	1024 x 768	1024 x 768	1280 x 800	1024 x 768	1920 x 1080	1024 x 768	1024 x 768
Viewing Angles	178°/178°	176°/176°	178°/178°	176°/176°	176°/176°	170°/170°	178°/178°	178°/178°
Touch Function								
Touch Type	Projective capacitive (PCAP) touchscreen							
Glove Support	Yes							
Power Parameters								
Input Voltage	12/24 VDC						24 to 110 VDC	
Physical Characteristics								
Housing	Aluminum							
IP Rating	IP66 (front), IP20 (rear)						SPK models: IP66 (front), IP20 (rear) Non-SPK models: IP66 (front, rear)	
Dimensions	200 x 140 x 60.5 mm (7.87 x 5.51 x 2.38 in)	260 x 210 x 73.8 mm (10.28 x 8.27 x 2.91 in)	315 x 220 x 75.7 mm (12.40 x 8.66 x 2.98 in)	315 x 220 x 75.7 mm (12.40 x 8.66 x 2.98 in)	370 x 297 x 73.7 mm (14.57 x 11.69 x 2.90 in)	398 x 254 x 75.7 mm (15.67 x 10 x 2.98 in)	257 x 214 x 59 mm (10.11 x 8.44 x 2.32 in)	297 x 248 x 59 mm (11.69 x 9.76 x 2.32 in)
Weight	1,600 g (3.53 lb)	2,300 g (5.07 lb)	2,900 g (6.39 lb)	3,000 g (6.61 lb)	4,300 g (9.48 lb)	4,000 g (8.82 lb)	2,080 g (4.59 lb)	2,850 g (6.28 lb)
Environmental Limits								
Operating Temperature	-30 to 60°C (-22 to 140°F)						-40 to 70°C (-40 to 158°F)	
Storage Temperature (Package Included)	-40 to 70°C (-40 to 158°F)							
Ambient Relative Humidity	5 to 95% (non-condensing)							
Standards and Certifications								
Hazardous Locations	CID2, ATEX Zone 2, IECEx Zone 2						-	
Maritime	DNV-CG-0339, IEC 60945, IACS E10						-	
Railway	-						EN 50155	
Safety	IEC 62368-1, UL 62368-1							
Shock	IEC 60068-2-27						EN 50155	
Vibration	IEC 60068-2-64, IEC 60068-2-6						EN 50155	
Warranty								
Warranty Period	LCD: 1 year, System: 3 years							



Moxa Industrial Linux (MIL)


Moxa Industrial Linux (MIL) is a Debian-based Linux distribution which offers 10-year long-term support with security patches and bug fixes without extra subscription costs, lowering the total cost of ownership (TCO). When paired with Moxa's Arm-based computers, MIL delivers up to 1.5x better operational efficiency compared to other IPCs running third-party operating systems. Furthermore, MIL accelerates application development and time-to-market with intuitive Moxa utilities for system, network, and I/O management.



MIL Product Page

Build a Foundation for Long-term Stability With Moxa Industrial Linux

Moxa Industrial Linux (MIL) leverages the Civil Infrastructure Platform (CIP) to provide long-term stability for your applications. Engineered for maximum reliability and security, MIL streamlines the entire project life cycle by accelerating development, reducing costs, and ensuring seamless transitions from initial planning to operations. MIL also comes with intuitive Moxa utilities for system, network, and interface management.

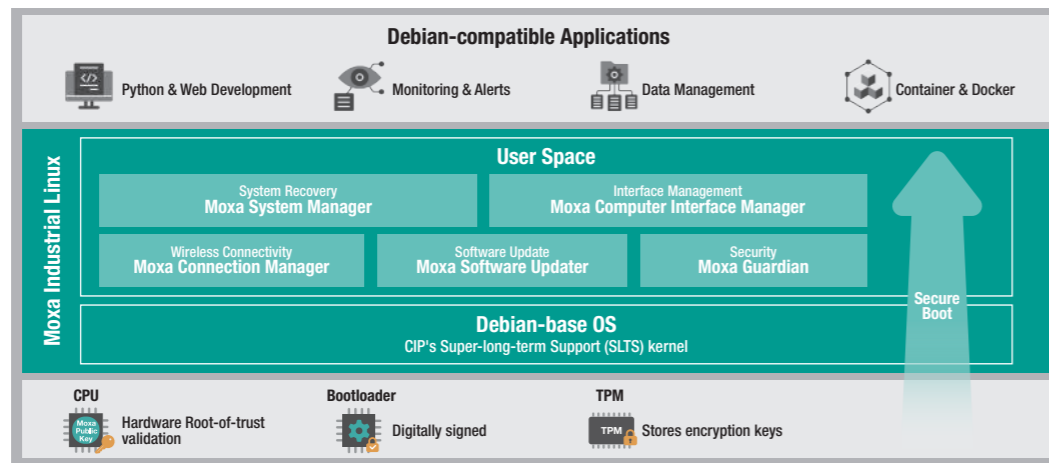

Protect Assets With a Certified and Compliant Linux Foundation

MIL is developed according to the IEC 62443-4-1 certified development life cycle procedure, ensuring robust security measures. Moxa computers with MIL3 provide a trusted Linux foundation compliant with IEC 62443-4-2 Security Level 2 requirements and come with hardened security features for EN 18031-1 compliant wireless cybersecurity, delivering enhanced protection against cyberthreats.

Reliable, Secure, and Easy-to-use Development Platform



Reliable Connectivity and System Stability

MIL provides network keep-alive and intelligent failover across Ethernet, Wi-Fi, and cellular networks for continuous connectivity. A dual file system further ensures safe updates and rapid recovery to maximize uptime.



Industrial-grade Security and Long-term Support

MIL and Secure Boot provide a robust security framework from the bootloader to the operating system, ensuring only trusted software is loaded during system bootup to prevent attacks and enhance system security. Furthermore, MIL offers 10-year support with security patches and fixes, ensuring security and long-term reliability for your system.




Easy-to-use Development Platform

MIL features built-in tools for interface and network management as well as system recovery to streamline the development process. Additionally, being Debian-based, MIL enables easy migration from Ubuntu and Raspberry Pi.

Built-in Tools for Deployment and Maintenance

◆ Moxa Connection Manager (MCM) Keeps Connections Alive

MCM offers an intuitive GUI for configuring and prioritizing Ethernet, Wi-Fi, and cellular network profiles. MCM maintains connections with failover and failback—even during cyberattacks—and supports connection diagnostics, making it ideal for applications requiring reliable network switching and multi-channel connectivity.

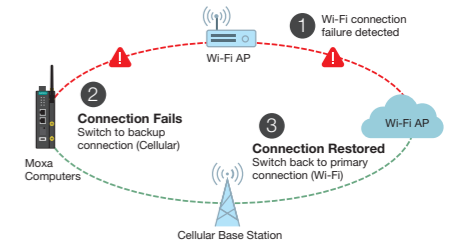


◆ Moxa System Manager (MSM) Ensures Operational Resilience

MSM enables full-system snapshots and backup and restore for quick system recovery after system failures. MSM also supports file system failover during system bootup, factory reset, and decommissioning to help maintain system availability and for efficient system life cycle management.


◆ Moxa Connection Interface Manager (MCIM) Unifies Interfaces

MCIM simplifies system integration by providing a unified interface for managing various I/O hardware and non-standard components—such as DI/DO, buttons, disks, buzzers, and RS-232/422/485 serial devices. MCIM eliminates the need to adapt control logic for various SoC platforms, reducing complexity and accelerating application development.

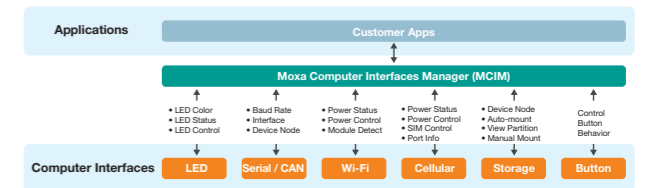


◆ Moxa Software Updater (MSU) Keeps MIL Up to Date

MSU enables you to keep Moxa Industrial Linux up to date with the latest security patches, including fixes for known common vulnerabilities and exposures (CVEs). MSU supports both online and offline updates and includes an auto-recovery mechanism to ensure safe updates even when interrupted by update failures.



◆ Moxa Guardian Enables Security Diagnostics

Moxa Guardian helps evaluate device compliance with IEC 62443-4-2 Security Level 2 requirements. It compares current system settings against the recommended security baseline, identifies deviations, and provides actionable suggestions—including an option for one-click remedies—to help users maintain both compliance and robust security.

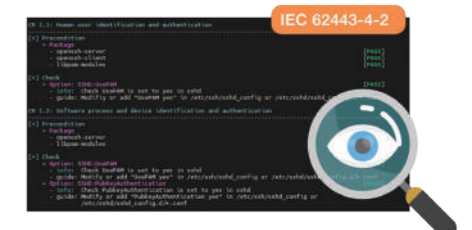

Device Life Cycle Management (DLM)

Moxa DLM streamlines device life-cycle management by automating provisioning, updates, and monitoring, reducing manual efforts and operational costs through centralized control and proactive troubleshooting.




DLM Product Page



Centralized Management of Your Distributed Cellular Devices

Moxa Device Life Cycle Management (DLM) enables centralized remote management of distributed devices. You can choose from two deployment models—a localized self-hosted version and a cloud-based SaaS platform. Operators can manage, update, and troubleshoot devices in batches remotely while providing full visibility into device health and status with real-time notifications. DLM also monitors and records cellular performance, offering historical insights and reports to help teams optimize network reliability and operational efficiency.

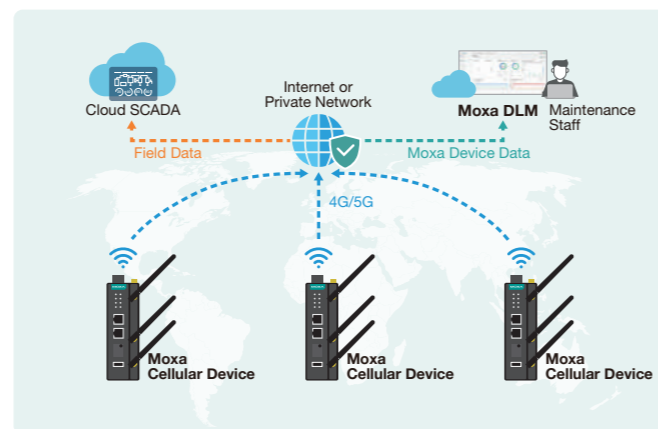


Full Visibility of Device Health and Status



The DLM dashboard gives operators a centralized overview of their deployments:

- View device online/offline status, project assignment, and location
- Review recent warnings and alerts to quickly identify issues
- Visualize cellular signal strength, data usage, and device distribution by fleet or region

Remotely Manage, Update, and Troubleshoot Your Operations

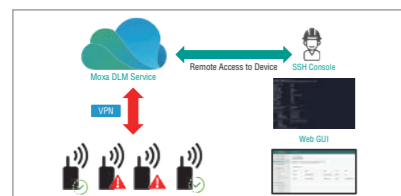

DLM provides secure browser-based remote access to registered devices without exposing their services directly to the internet. Highlights include:

- Secure tunnel for one-click, browser-based SSH access
- Diagnose issues, check logs, and fix devices remotely—no site visits
- All remote sessions are fully logged for security and compliance

Monitor and Record Cellular Performance With Historical Reports




With the DLM Agent running on Moxa cellular devices, key information is continuously reported back to the DLM server, including:

- System health (CPU, memory, disk usage)
- Cellular performance (RSRP, RSRQ, SINR, serving cell information)
- Device configuration and connectivity status


Simplify Every Step of Your Operation

From provisioning to global operations, Moxa streamlines the transition from development to large-scale deployment through Moxa Swift management software. During the initial provisioning stage, Moxa Swift facilitates effortless batch deployment, allowing users to configure multiple devices simultaneously with precision and speed. Once these optimized configurations are verified, devices are ready for field testing and global deployment. Moxa DLM then provides a centralized platform to remotely monitor device health, automate firmware updates, and manage security patches across the entire network. Moxa DLM and Swift work together to optimize operations and maintenance for mission-critical industrial applications.

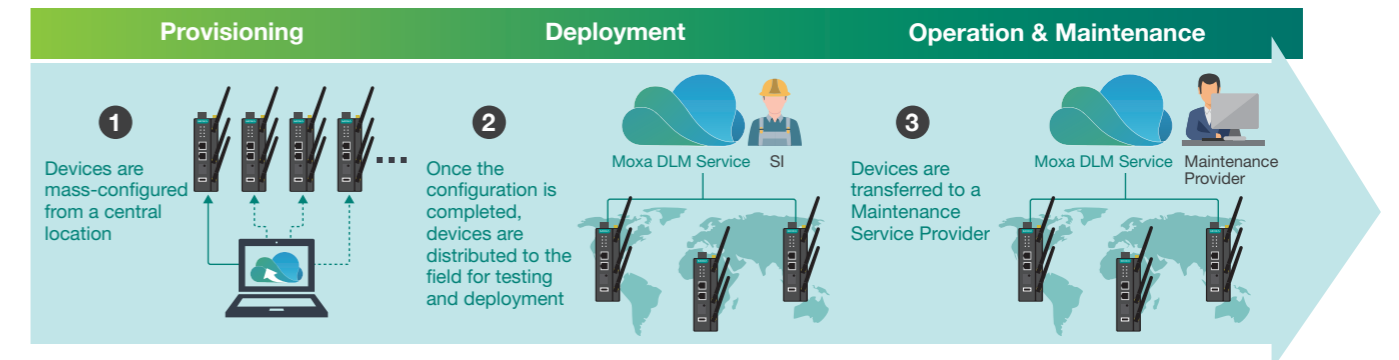

Mass Provisioning of Computers With Ease

Moxa Swift is a localized provisioning tool designed for Moxa industrial computers. By utilizing a Golden Image of the configuration, you can capture a full system backup and simultaneously deploy it across multiple devices. Featuring an intuitive web GUI, Moxa Swift simplifies initial device configuration, software installation, and system restoration over a local network, ensuring consistent and rapid deployment.

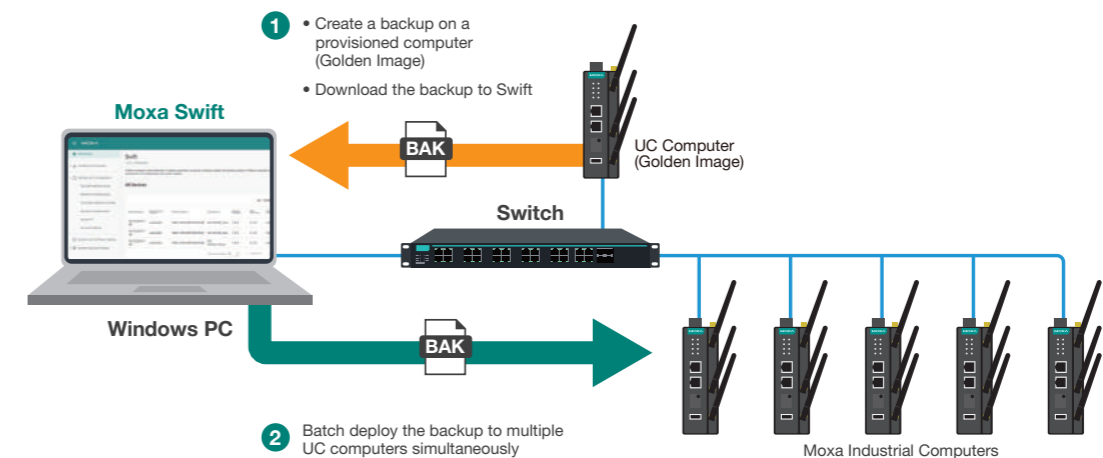

Accessories

Moxa provides a wide range of accessories that include wireless antennas, backup configurators, fiber-optic adapters and fiber bypass units, PoE injectors and splitters, power supplies and adapters, SFP modules, and mounting kits. All of these accessories play an important role to complement Moxa's industrial solutions and help guarantee reliable performance.



Wireless Antennas and Cables

Moxa offers a wide variety of cellular and WLAN antennas and cables that are easy to install and simplify the process of establishing wireless networks.



Backup Configurators

These automatic backup configurators are designed to perform configuration backup and restoration for Moxa's managed Ethernet switches, wireless AP/bridge/client devices, routers, and LAN firewalls.



Fiber-optic Adapters and Bypass Units

Our fiber-optic adapters are optional accessories that provide more fiber-optic connection options for Moxa's industrial Ethernet switches. In addition, Moxa's fiber bypass units add bypass relay functionality to any network node.



PoE Injectors and Splitters

Moxa's PoE injectors combine power and data over a single Ethernet cable and provide non-PoE power sourcing equipment (PSE) the ability to supply power to powered devices (PD). In addition, Moxa PoE splitters give non-PoE powered devices (PD) the ability to leverage PoE power sourcing equipment (PSE).



Power Supplies and Adapters

In order to ensure that space and power source input/output requirements for industrial control systems are met, Moxa offers a wide variety of power supplies and adapters.




SFP Modules

Our small form-factor pluggable transceiver (SFP) Ethernet fiber modules support Fast Ethernet, Gigabit Ethernet, 2.5 Gigabit Ethernet, or 10 Gigabit Ethernet. They facilitate coverage across a wide range of communication distances.



Mounting Kits

Moxa's versatile mounting kits include options for desktop, wall, DIN-rail, VESA, and rack mounting, and have been designed to simplify installation of products in a variety of industrial environments.

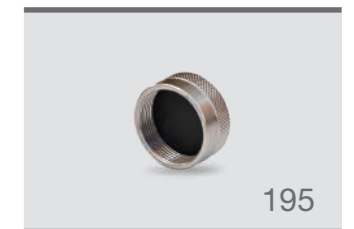

Caps, Cables, and Connectors

Our caps and connectors include a selection of pin and code types with high IP ratings to ensure suitability for industrial environments. Our cables come in a variety of lengths and pin options to ensure compatibility for a wide range of applications.



EtherCAT Automation Devices

Moxa's EtherCAT junctions are designed to empower industrial applications with high-speed, cost-effective, and deterministic EtherCAT technology. Featuring superior reliability for non-stop operations and a compact size for flexible deployment, these devices help build versatile EtherCAT topologies.



Surge Protectors

Moxa's surge protectors feature certified serial protection that ensures serial data lines are not damaged by power surges or spikes.



Other Accessories

These accessories include HDD/SSD kits, data line surge protectors, and Wi-Fi modules.

Wireless Antennas and Cables

Cellular Antennas



Model Name	ANT-LTEUS-ASM-01	ANT-LTE-ASM-02	ANT-5G-ASM-03	ANT-5G-OSM-04
Antenna Characteristics				
Frequency	700/850/900/1700/1900/2600 MHz	800/900/1800/2100/2600 MHz	617 to 960 MHz 1420 to 1561 MHz 1710 to 2170 MHz 2300 to 2690 MHz	615 to 960 MHz 1164 to 1606 MHz 1710 to 2170 MHz 2400 to 2690 MHz 3300 to 3800 MHz 4100 to 4900 MHz 5150 to 5925 MHz
Antenna Type	Omnidirectional	Omnidirectional	Omnidirectional	Omnidirectional
Peak Antenna Gain	1 dBi @ 698 to 960 MHz 2 dBi @ 1710 to 1990 MHz 2 dBi @ 2300 to 2400 MHz 2 dBi @ 2500 to 2700 MHz	2 dBi	3.02 dBi @ 617 to 698 MHz 0.70 dBi @ 698 to 824 MHz 0.63 dBi @ 824 to 960 MHz 2.50 dBi @ 1420 to 1561 MHz 2.83 dBi @ 1710 to 1880 MHz 2.91 dBi @ 1850 to 1990 MHz 3.65 dBi @ 1920 to 2170 MHz 3.67 dBi @ 2300 to 2690 MHz	1.8 dBi @ 615 to 960 MHz 3.6 dBi @ 1164 to 1606 MHz 3.6 dBi @ 1710 to 2170 MHz 2.9 dBi @ 2400 to 2690 MHz 4.8 dBi @ 3300 to 3800 MHz 3.9 dBi @ 4100 to 4900 MHz 3.7 dBi @ 5150 to 5925 MHz
Connector	1 x SMA (male)	1 x SMA (male)	1 x SMA (male)	1 x SMA (male)
Polarization	Linear	Linear	Linear	Linear
V.S.W.R.	< 3	< 3	< 5.85 @ 617 to 960 MHz < 2 @ 1420 to 1561 MHz < 3 @ 1710 to 2690 MHz	< 5.5
Physical Characteristics				
Installation	Straight mount	Straight mount	Straight mount	Straight mount
Dimensions	205 mm (8.07 in)	161 mm (6.34 in)	157.5 mm (6.2 in)	176 mm (6.93 in)
Cable	-	-	-	-
Cable Length	-	-	-	-
IP Rating	-	-	-	IP67
Environmental Limits				
Operating Temperature	-30 to 75°C (-22 to 167°F)	-20 to 65°C (-4 to 149°F)	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)

Wireless Antennas and Cables

Cellular Antennas



Model Name	ANT-5G-OSM-03	MAT-5G-PA-SM-2-06-3m	MAT-5G-PA-SM-3-06-3m	MAT-5G-PA-SM-4-05-1m
Antenna Characteristics				
Frequency	617 to 960 MHz 1452 to 2690 MHz 3300 to 5850 MHz 5850 to 7150 MHz	617 to 960 MHz 1427 to 1510 MHz 1710 to 2170 MHz 2300 to 2690 MHz	Cellular: 617 to 960 MHz 1427 to 1510 MHz 1710 to 2170 MHz 2300 to 2690 MHz GNSS: 1561.00/1575.42/1602.00 MHz	698 to 960 MHz 1710 to 2700 MHz 3300 to 5925 MHz
Antenna Type	Omnidirectional	Panel	Panel	Panel
Peak Antenna Gain	1.5 dBi @ 617 to 960 MHz 4 dBi @ 1452 to 2690 MHz 4 dBi @ 3300 to 5850 MHz 4 dBi @ 5850 to 7150 MHz	1.55 dBi @ 617 to 698 MHz 4.32 dBi @ 698 to 824 MHz 5.18 dBi @ 824 to 960 MHz 6.69 dBi @ 1427 to 1510 MHz 6.80 dBi @ 1710 to 1880 MHz 7.10 dBi @ 1850 to 1990 MHz 7.10 dBi @ 1920 to 2170 MHz 5.41 dBi @ 2300 to 2690 MHz	Cellular: 2.64 dBi @ 617 to 698 MHz 5.23 dBi @ 698 to 824 MHz 4.73 dBi @ 824 to 960 MHz 6.66 dBi @ 1427 to 1510 MHz 6.14 dBi @ 1710 to 1880 MHz 5.92 dBi @ 1850 to 1990 MHz 5.92 dBi @ 1920 to 2170 MHz 5.54 dBi @ 2300 to 2690 MHz GNSS: 1.21 dBi @ 1561.00 MHz 1.29 dBi @ 1575.42 MHz 1.44 dBi @ 1602.00 MHz With low-noise amplifier: 30 dB	3 dBi @ 698 to 960 MHz 4 dBi @ 1710 to 2700 MHz 5 dBi @ 3300 to 5925 MHz
Connector	1 x SMA (male)	2 x SMA (male)	3 x SMA (male)	4 x SMA (male)
Polarization	Linear	Linear	Linear	Linear
V.S.W.R.	≤ 2.5 @ 617 to 960 MHz ≤ 2 @ 1452 to 2690 MHz ≤ 2 @ 3300 to 5850 MHz ≤ 2.5 @ 5850 to 7150 MHz	-	-	-
Physical Characteristics				
Installation	Adhesive mount	Screw mount	Screw mount	Screw mount, Pole mount
Dimensions	110 x 20 x 5.4 mm (4.33 x 0.79 x 0.21 in)	135.95 x 135.95 x 47.44 mm (5.35 x 5.35 x 1.87 in)	135.95 x 135.95 x 47.44 mm (5.35 x 5.35 x 1.87 in)	141.3 x 50 mm (5.56 x 1.97 in)
Cable	RG174	SNC200	SNC200	J195
Cable Length	1, 1.5, 2 m	3 m	3 m	1 m
IP Rating	-	IPx9K	IPx9K	IP67
Environmental Limits				
Operating Temperature	-30 to 70°C (-22 to 158°F)	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)	-30 to 70°C (-22 to 158°F)

DC Power Cord

Locking barrel plug-to-bare wires



Model Name	CBL-PJ21NOPEN-BK-30 w/ Nut
Physical Characteristics	
Cable Length	300±20 mm (11.81±0.79 in)

Non-locking barrel plug-to-bare wires



Model Name	CBL-PJTB-10
Physical Characteristics	
Cable Length	100 ± 20 mm (3.94 ± 0.79 in)

WLAN Antennas



Model Name	ANT-WDB-ANM-0306	ANT-WDB-ANM-0502	ANT-WDB-ONF-0709	ANT-WDB-ONM-0707	ANT-WDB-PNF-1011	ANT-WSB5-PNF-16	ANT-WSB-PNF-12-02	MAT-WDB-PANF-2-0708
Antenna Characteristics								
Frequency	2.4 to 2.5 GHz 4.9 to 5.825 GHz	2.4 to 2.5 GHz 5.1 to 5.9 GHz	2.4 to 2.4835 GHz 5.15 to 5.85 GHz	2.4 to 2.4835 GHz 5.15 to 5.85 GHz	2.4 to 2.4835 GHz 5.15 to 5.85 GHz	5.15 to 5.85 GHz	2.4 to 2.4835 GHz	2.4 to 2.5 GHz 4.9 to 5.9 GHz
Antenna Type	Omnidirectional	Omnidirectional	Omnidirectional	Omnidirectional	Directional, Panel	Directional, Panel	Directional, Panel	MIMO 2x2, Directional, Panel
Peak Antenna Gain	3.5/6 dBi	5/2 dBi	7/9 dBi	7/7 dBi	10/11 dBi	16 dBi	12 dBi	7/8 dBi
Connector	N-type (male)	N-type (male)	N-type (female)	N-type (male)	N-type (female)	N-type (female)	N-type (female)	N-type (female)
Polarization	Linear	Linear	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
HPBW/ Horizontal	360°	360°	360°	360°	40°	30°	30°	90°
V.S.W.R.	2:1 (max.)	1:2 (max.)	1:2.5 (max.)	1:2.5 (max.)	1:3.0 (max.)	1:2.0 (max.)	1:2.0 (max.)	2:1 (max.)
HPBW/Vertical	–	65°	–	–	30°	23°	30°	50°
Physical Characteristics								
IP Rating	IP67	IP67	IP65	IP65	IP65	IP65	IP65	–
Length (Including RF Cable)	215 mm (8.46 in)	189.4 mm (7.46 in)	610 mm (24.0 in)	528 mm (20.79 in)	260 x 260 x 44 mm (10.27 x 10.27 x 1.73 in)	260 x 260 x 44 mm (10.27 x 10.27 x 1.73 in)	260 x 260 x 44 mm (10.27 x 10.27 x 1.73 in)	206 x 177 x 45 mm (8.11 x 6.97 x 1.77 in)
Installation	Straight mount	Straight mount	Pole mount	Straight mount	Pole mount	Pole mount	Pole mount	Pole mount
Environmental Limits								
Operating Temperature	-40 to 75°C (-40 to 167°F)	-40 to 80°C (-40 to 176°F)	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)	-40 to 75°C (-40 to 167°F)

WLAN Antennas



Model Name	ANT-WDB-ARM-02	ANT-WDB-ARM-0202	ANT-WDB6-ARM-05	ANT-WSB-AHRM-05-1.5m	MAT-WDB-CA-RM-2-0205	MAT-WDB-DA-RM-2-0203-1m
Antenna Characteristics						
Frequency	2.4 to 2.5 GHz 5.2 to 5.8 GHz	2.4 to 2.5 GHz 4.9 to 5.825 GHz	2.4 to 2.5 GHz 5.15 to 5.925 GHz 6.025 to 7.125 GHz	2.4 to 2.5 GHz	2.4 to 2.5 GHz 4.9 to 5.9 GHz	2.4 to 2.5 GHz 4.9 to 5.85 GHz
Antenna Type	Omnidirectional	Omnidirectional	Omnidirectional	Omnidirectional, Rubber antenna	MIMO 2x2, Omnidirectional	MIMO 2x2, Omnidirectional
Peak Antenna Gain	2/2 dBi	2/2 dBi	2/2/3 dBi	5 dBi 1 dBi (with base mount installed)	2/5 dBi	2/3 dBi
Connector	RP-SMA (male)	RP-SMA (male)	RP-SMA (male)	RP-SMA (male)	RP-SMA (male)	RP-SMA (male)
Polarization	Vertical	Linear	Linear	Linear	Linear	Linear, Vertical
HPBW/ Horizontal	360°	360°	–	360°	360°	360°/114°
HPBW/Vertical	80°	–	–	80°	–	75°/54°
V.S.W.R.	2:1 (max.)	2:1 (max.)	2.1:1	2:1 (max.)	2:1 (max.)	2:1 (max.)
Physical Characteristics						
Length	108 mm (4.25 in)	136 mm (5.35 in)	176 mm (6.93 in)	–	–	–
Installation	Straight mount	Straight mount	Straight mount	Magnetic mount	Ceiling mount	Desktop mount
Cable Length	–	–	–	1.5 m	250 mm (9.84 in)	1 m
IP Rating	–	–	–	–	–	IP55
Environmental Limits						
Operating Temperature	-40 to 80°C (-40 to 176°F)	-40 to 75°C (-40 to 167°F)	-40 to 85°C (-40 to 185°F)	-40 to 80°C (-40 to 176°F)	-40 to 75°C (-40 to 167°F)	-40 to 75°C (-40 to 167°F)

Wireless Antenna Cables



Model Name	A-CRF-NMNM-LL4-300	A-CRF-NMNM-LL4-600	A-CRF-NMNM-LL4-900	A-CRF-RMNM-L1-300	A-CRF-RMNM-L1-600	A-CRF-RMNM-L1-900
Physical Characteristics						
Cable Type	LMR-400 Lite			LMR-195 Lite		
Connector Type	N-type (male) to N-type (male)			N-type (male) to RP-SMA (male)		
Cable Length	3 m	6 m	9 m	3 m	6 m	9 m



Model Name	A-CRF-RFRM-C2-300	A-CRF-RFRM-C2-500	A-CRF-RFRM-R5-60	A-CRF-RFRM-R4-150	A-CRF-SMSF-R3-100	A-CRF-SMSF-L1-300	A-CRF-SMSF-C2-300	A-CRF-SMSF-C2-500
Physical Characteristics								
Cable Type	CFD-200	CFD-200	RG-402	RG-174	RG-174	LMR-195	CFD-200	CFD-200
Connector Type	RP-SMA (female) to RP-SMA (male)				SMA (female) to SMA (male)			
Cable Length	3 m	5 m	0.6 m	1.5 m	1 m	3 m	3 m	5 m

Surge Arresters



Model Name	A-SA-NFNF-02	A-SA-NMNF-02
Physical Characteristics		
Frequency	0 to 6 GHz	
Connector Type	N-type (female) to N-type (female)	N-type (male) to N-type (female)

Terminating Resistors



Model Name	A-TRM-50-NM	A-TRM-50-RM
Physical Characteristics		
Connector Type	N-type (male)	RP-SMA (male)
Impedance	50 ohms	

Signal Boosters



Model Name	BST-1110-T	BST-1220-T
Cellular Interface		
Cellular Antenna Connectors	3 x SMA (female)	5 x SMA (female)
Frequency Bands Supported	n78, n48	n79
Power Parameters		
Source of Input Power	Power adapter, 9 to 24 VDC	
Physical Characteristics		
Dimensions	100 x 125 x 35.2 mm (3.94 x 4.92 x 1.39 in)	
Housing	Metal	
IP Rating	IP30	
Weight	375 g (0.827 lb)	370 g (0.816 lb)
Installation	DIN-rail mounting, Wall mounting	
Environmental Limits		
Operating Temperature	-40 to 70°C (-40 to 158°F)	

GNSS Antennas



Model Name	ANT-GNSS-CSM-02-3m	ANT-GPS-CSM-04-3m
Antenna Characteristics		
Frequency	1561 to 1606 MHz	1575 to 1605 MHz
Antenna Type	Directional	Directional
Typical Antenna Gain	Without low-noise amplifier: -0.5 dBic @ 1561 MHz (BDS) 2 dBic @ 1575.42 MHz (GPS) 0.6 dBic @ 1598 to 1606 MHz (GLONASS) With low-noise amplifier: 35 dB	Without low-noise amplifier: 4 dBi ¹ With low-noise amplifier: 20±3 dB
Connector	SMA (male)	SMA (male)
Polarization	RHCP	RHCP
V.S.W.R.	< 2.0 (max.)	≤ 2.5
Supply Voltages	3 to 5.5 VDC	2.7 to 5.0 VDC
Physical Characteristics		
Dimensions	Ø 60.5 (D) x 79.2 (H) mm	48.8 mm (1.92 in)
Installation	Screw mount	Magnetic mount
Cable	RG-174	RG-174
Cable Length	3 m	3 m
IP Rating	IP67	IP65
Environmental Limits		
Operating Temperature	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)

¹ With a ground surface area of at least 70 x 70 mm (49 cm²).

Low-noise Amplifiers



Model Name	LNA-1120-T
Cellular Interface	
Cellular Antenna Connectors	4 x SMA (female)
Frequency Bands Supported	Cellular broadband LTE and NR frequencies
Power Parameters	
Source of Input Power	Powered by 5G user equipment (UE) via RF cable
Physical Characteristics	
Dimensions	75.4 x 60.4 x 15.5 mm (2.97 x 2.38 x 0.61 in)
Housing	Metal
IP Rating	IP30
Weight	73 g (0.16 lb)
Installation	Wall mounting
Environmental Limits	
Operating Temperature	-40 to 70°C (-40 to 158°F)

Backup Configurators



Model Name	ABC-01	ABC-02-USB	ABC-02-USB-T	ABC-03-microSD-T	ABC-01-M12	ABC-01-P-M12-CT-T	ABC-02-P-USB-M12-CT-T
Interface							
Connector	RJ45	USB 2.0 Type A		microSD card	Serial interface, M12 A-coded (female)		USB Type 2.0 Type A, M12 A-coded (male)
Basic Operation							
Storage Capacity	128 KB flash	2 GB eMMC type NAND flash		8 GB TLC type NAND flash	64 KB		128 MB

Fiber Optic Adapters and Fiber Bypass Units

Fiber Optic Adapters



Model Name	ADP-SCm-STf-S	ADP-SCm-STf-M
Interface		
Interface	SC (male), ST (female)	
Connector		
Fiber Type	Single-mode	Multi-mode

Optical Fiber Bypass Units



Model Name	OBU-102-SS-SC	OBU-102-SS-ST	OBU-102-SS-LC
Ethernet Interface			
Description	2-channel optical fiber bypass units		
Single-mode Fiber, SC Female Connector	4	–	–
Single-mode Fiber, ST Female Connector	–	4	–
Single-mode Fiber, LC Female Connector	–	–	4

PoE Injectors and Splitters



Model Name	INJ-24A	INJ-24	SPL-24
Ethernet Interface			
10/100/1000BaseT(X) Ports (RJ45 Connector)		1	–
PoE Ports (10/100/1000BaseT(X), RJ45 Connector)		1	–
10/100BaseT(X) Ports (RJ45 Connector)		–	1
PoE Ports (PD) (10/100BaseT(X), RJ45 Connector)		–	1
Power Over Ethernet			
Input Voltage	24/48 VDC		PoE (IEEE 802.3af)
PoE Output Power	Max. 60 W for each PoE port	Max. 30 W for each PoE port	Max. 12.95 W for each PoE port

Power Supplies and Adapters

24/48 VDC DIN-rail Power Supplies



Model Name	HDR-60-24	NDR-120-24	NDR-120-48	NDR-240-48	MDR-40-24	MDR-60-24
Output Power Parameters						
Wattage	60 W	120 W		240 W	40 W	60 W
Voltage	24 VDC		48 VDC		24 VDC	
Current Rating	0 to 2.5 A	0 to 5 A	0 to 2.5 A	0 to 5 A	0 to 1.7 A	0 to 2.5 A
Ripple and Noise	150 mVp-p	120 mVp-p	150 mVp-p			
Voltage Adjustment Range	21.6 to 29 VDC	24 to 28 VDC	48 to 55 VDC		24 to 30 VDC	
Setup/Rise Time at Full Load	500 ms, 50 ms at 115 VAC 500 ms, 50 ms at 230 VAC	2500 ms, 60 ms at 115 VAC 1200 ms, 60 ms at 230 VAC		3000 ms, 100 ms at 115 VAC 1500 ms, 100 ms at 230 VAC	500 ms, 30 ms at 115 VAC 500 ms, 30 ms at 230 VAC	
Typical Hold Up Time at Full Load	12 ms at 115 VAC 30 ms at 230 VAC	10 ms at 115 VAC 16 ms at 230 VAC		22 ms at 115 VAC 28 ms at 230 VAC	20 ms at 115 VAC 50 ms at 230 VAC	
Input Power Parameters						
Voltage Range	100 to 240 VAC (50 to 60 Hz) 120 to 370 VDC	90 to 264 VAC (47 to 63 Hz) 127 to 370 VDC			85 to 264 VAC (47 to 63 Hz) 120 to 370 VDC	
Typical Efficiency	90%	88%	89%	90%	88%	
Typical Current	0.8 A @ 230 VAC, 1.2 A @ 115 VAC	1.3 A @ 230 VAC, 2.25 A @ 115 VAC		1.3 A @ 230 VAC, 2.5 A @ 115 VAC	0.7 A @ 230 VAC, 1.1 A @ 115 VAC	1.0 A @ 230 VAC, 1.8 A @ 115 VAC
Inrush Current (Cold Start)	60 A @ 230 VAC, 30 A @ 115 VAC	35 A @ 230 VAC, 20 A @ 115 VAC			60 A @ 230 VAC, 30 A @ 115 VAC	
Overload Protection						
Rated Output Power	105 to 160%				105 to 150%	
Protection Type	Constant current limiting, recovers automatically after fault condition is removed					
Overvoltage Protection						
Overvoltage Range	30 to 36 V	29 to 33 V	56 to 65 V		31.2 to 36 V	
Protection Type	Shut down operating voltage, repower on to recover					
Physical Characteristics						
Dimensions	52.5 x 90 x 58.6 mm (2.07 x 3.54 x 2.31 in)	40 x 125.2 x 114.0 mm (1.57 x 4.93 x 4.49 in)		63 x 125.2 x 114.0 mm (2.48 x 4.93 x 4.49 in)	40 x 90 x 100 mm (1.57 x 3.54 x 3.94 in)	
Weight	230 g (0.5 lb)	500 g (1.10 lb)		900 g (1.98 lb)	260 g (0.57 lb)	280 g (0.62 lb)
Environmental Limits						
Operating Temperature	-30 to 70°C (-22 to 158°F)	-20 to 70°C (-4 to 158°F)				
Max. Operating Temperature at Full Load	45°C (113°F)		50°C (122°F)	60°C (140°F)	55°C (131°F)	
Ambient Relative Humidity	20 to 90% (non-condensing)	20 to 95% (non-condensing)			20 to 90% (non-condensing)	
Standards and Certifications						
Safety	UL 508, EN 62368-1, UL 62368-1, IEC 62368-1	UL 508, EN 62368-1, IEC 62368-1				
EMC	EN 55032/35, EN 61000-3-2 Class A, EN 61000-3-3, EN 61204-3, IEC 61204-3, EN 61000-6-2, IEC 61000-6-2					
Warranty						
Warranty Period	3 years					

AC Power Supplies

Locking barrel plugs, 12 VDC 0.5 A, 100 to 240 VAC (switch mode)



Model Name	PWR-12050-USJP-S1	PWR-12050-EU-S1	PWR-12050-UK-S1	PWR-12050-AU-S1	PWR-12050-CN-S1
Input Power Parameters					
Voltage Range	100 to 240 VAC (50 to 60 Hz)				
Power Parameters					
Input Plug Type	US/JP	EU	UK	AU	CN
Output Power Rating	0.5 A @ 12 VDC				
Output Plug Type	Connector type: S-Type 5.5/2.1/9.5				
Physical Characteristics					
Dimensions	67.8 x 33.0 x 39.0 mm (2.67 x 1.30 x 1.54 in)	68.0 x 33.0 x 55.0 mm (2.68 x 1.30 x 2.17 in)	67.8 x 50.3 x 43.0 mm (2.67 x 1.98 x 1.69 in)	67.9 x 33.5 x 39.4 mm (2.67 x 1.32 x 1.55 in)	67.8 x 33.0 x 39.0 mm (2.67 x 1.30 x 1.54 in)
Weight	71 g (0.16 lb)	77 g (0.17 lb)	80 g (0.18 lb)	75 g (0.17 lb)	71 g (0.16 lb)
Cord Length	1500±100 mm (59.06±3.94 in)				
Environmental Limits					
Operating Temperature	0 to 40°C (32 to 104°F)				
Storage Temperature	-20 to 70°C (-4 to 158°F)				
Standards and Certifications					
Safety	FCC, UL, PSE	CE, GS	CE	RCM	CCC

AC Power Supplies

Locking barrel plugs, 12 VDC, 3 A, 100 to 240 VAC (switch mode)



Model Name	PWR-12300-WPUSJP-S2	PWR-12300-WPEU-S2	PWR-12300-WPUK-S2	PWR-12300-WPAU-S2	PWR-12300-WPCN-S2
Input Power Parameters					
Voltage Range	100 to 240 VAC (50 to 60 Hz)				
Power Parameters					
Input Plug Type	US/JP	EU	UK	AU	CN
Output Power Rating	3 A @ 12 VDC				
Output Plug Type	Connector type: S-Type 5.5/2.1/9.5				
Physical Characteristics					
Dimensions	93.0 x 50.0 x 39.6 mm (3.66 x 1.97 x 1.56 in)				
Weight	195 g (0.43 lb)				
Cord Length	1500±100 mm (59.06±3.94 in)				
Environmental Limits					
Operating Temperature	0 to 40°C (32 to 104°F)				
Storage Temperature	-20 to 70°C (-4 to 158°F)				
Standards and Certifications					
Safety	CE, FCC, UL, RCM, PSE, CCC, GS				

AC Power Supplies

Non-locking barrel plugs, 12 VDC, 0.5 A, 100 to 240 VAC (switch mode)



Model Name	PWR-12050-USJP-S2	PWR-12050-EU-S2	PWR-12050-UK-S2	PWR-12050-AU-S2	PWR-12050-CN-S2	PWR-12050-IN-S2
Input Power Parameters						
Voltage Range	100 to 240 VAC (50 to 60 Hz)					
Power Parameters						
Input Plug Type	US/JP	EU	UK	AU	CN	IN
Output Power Rating	0.5 A @ 12 VDC					
Output Plug Type	Connector type: S-Type 5.5/2.1/9.5					
Physical Characteristics						
Dimensions	67.8 x 33.0 x 39.0 mm (2.67 x 1.30 x 1.54 in)	68.0 x 33.0 x 55.0 mm (2.68 x 1.30 x 2.17 in)	67.9 x 50.3 x 43.0 mm (2.67 x 1.98 x 1.69 in)	67.9 x 39.4 x 42.5 mm (2.67 x 1.55 x 1.67 in)	67.8 x 33.0 x 39.0 mm (2.67 x 1.30 x 1.54 in)	67.8 x 33.0 x 39.0 mm (2.67 x 1.30 x 1.54 in)
Weight	78 g (0.17 lb)	83 g (0.18 lb)	85 g (0.19 lb)	81 g (0.18 lb)	77 g (0.17 lb)	90 g (0.19 lb)
Cord Length	1500±100 mm (59.06±3.94 in)					
Environmental Limits						
Operating Temperature	0 to 40°C (32 to 104°F)					
Storage Temperature	-20 to 70°C (-4 to 158°F)					
Standards and Certifications						
Safety	FCC, UL, PSE	CE, GS	CE	RCM	CCC	BIS

AC Power Supplies

Non-locking barrel plugs, 12 VDC, 1.5 A, 100 to 240 VAC



Model Name	PWR-12150-WPUS.JP-S2	PWR-12150-WPEU-S2	PWR-12150-WPUK-S2	PWR-12150-WPAU-S2	PWR-12150-WPCN-S2	PWR-12150-WPIN-S2
Input Power Parameters						
Voltage Range	100 to 240 VAC (50 to 60 Hz)					
Power Parameters						
Input Plug Type	US/JP	EU	UK	AU	CN	IN
Output Power Rating	1.5 A @ 12 VDC					
Output Plug Type	Connector type: S-Type 5.5/2.1/9.5					
Physical Characteristics						
Dimensions	80.5 x 39.1 x 56.4 mm (3.17 x 1.54 x 2.22 in)					
Weight	113 g (0.25 lb)					
Cord Length	1500±100 mm (59.06±3.94 in)					
Environmental Limits						
Operating Temperature	0 to 40°C (32 to 104°F)					
Storage Temperature	-20 to 70°C (-4 to 158°F)					
Standards and Certifications						
Safety	CE, FCC, UL, RCM, PSE, CCC, GS					BIS

AC Power Supplies

Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC (switch mode)



Model Name	PWR-12150-WPUS.JP-S4	PWR-12150-WPEU-S4	PWR-12150-WPUK-S4	PWR-12150-WPAU-S4	PWR-12150-WPCN-S4	PWR-12150-WPIN-S4
Input Power Parameters						
Voltage Range	100 to 240 VAC (50 to 60 Hz)					
Power Parameters						
Input Plug Type	US/JP	EU	UK	AU	CN	IN
Output Power Rating	1.5 A @ 12 VDC					
Output Plug Type	Connector type: S-Type 5.5/2.1/9.5					
Physical Characteristics						
Dimensions	80.5 x 39.1 x 56.4 mm (3.17 x 1.54 x 2.22 in)					
Weight	113 g (0.25 lb)					
Cord Length	1500±100 mm (59.06±3.94 in)					
Environmental Limits						
Operating Temperature	0 to 40°C (32 to 104°F)					
Storage Temperature	-20 to 70°C (-4 to 158°F)					
Standards and Certifications						
Safety	CE, FCC, UL, RCM, PSE, CCC, GS					BIS

Power Cords



Model Name	PWC-C13US-3B-183	PWC-C13EU-3B-183	PWC-C13UK-3B-183	PWC-C13JP-3B-183	PWC-C13AU-3B-183	PWC-C13CN-3B-183
Power Parameters						
Input Plug Type	US	EU	UK	JP	AU	CN
Input Voltage	125 VAC	250 VAC		125 VAC	250 VAC	
Max. Current	10 A			7 A	10 A	
Physical Characteristics						
Thickness	6.7±0.2 mm (0.25±0.01 in)			7.0±0.2 mm (0.28±0.01 in)	6.3±0.2 mm (0.25±0.01 in)	
Length	1830±30 mm (72.05±1.18 in)					

Wide-temperature AC Power Supplies

Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC (switch mode)



Model Name	PWR-12150-USJP-SA-T	PWR-12150-EU-SA-T	PWR-12150-UK-SA-T	PWR-12150-AU-SA-T	PWR-12150-CN-SA-T
Input Power Parameters					
Voltage Range	100 to 240 VAC (50 to 60 Hz)				
Power Parameters					
Input Plug Type	US/JP	EU	UK	AU	CN
Output Power Rating	1.5 A @ 12 VDC				
Output Plug Type	Connector type: L-Type 5.5/2.1/9.5				
Physical Characteristics					
Dimensions	32.5 x 53.2 x 88 mm (1.28 x 2.1 x 3.46 in)	32.5 x 66.5 x 88 mm (1.28 x 2.62 x 3.46 in)	50 x 59.7 x 91.3 mm (1.97 x 2.35 x 3.59 in)	32.5 x 56.9 x 87.7 mm (1.28 x 2.24 x 3.45 in)	32.5 x 53.2 x 88 mm (1.28 x 2.09 x 3.46 in)
Weight	123 g (0.27 lb)	148 g (0.33 lb)	152 g (0.34 lb)	145 g (0.32 lb)	141 g (0.31 lb)
Cord Length	1500±100 mm (59.06±3.94 in)				
Environmental Limits					
Operating Temperature	-40 to 75°C (-40 to 167°F)				
Storage Temperature	-40 to 75°C (-40 to 167°F)				
Standards and Certifications					
Safety	FCC, UL, PSE	TUV, CE, GS	CE	RCM	CCC

Power Cords



Model Name	PWC-C15US-3B-183	PWC-C15EU-3B-183
Power Parameters		
Input Plug Type	US	EU
Input Voltage	125 VAC	250 VAC
Max. Current	15 A	10 A
Physical Characteristics		
Thickness	9.3±0.2 mm (0.37±0.01 in)	7.0±0.2 mm (0.28±0.01 in)
Length	183 cm (72 in)	
Compatibility		
Supported Products	MRX-G4064 Series, MRX-Q4064 Series	

Modular Power Supplies



Model Name	PWR Power Modules	PWR-A Power Modules	PWR-100 Power Modules	PWR-300-HVA-IF Power Modules	PWR-G7000A-AC Power Modules
Power Parameters					
Input Voltage	<p>PWR-HV-P48: 110/220 VDC/VAC for the switch system 48 VDC for PoE systems (53 to 57 VDC is recommended for PoE+/PoE++ devices)</p> <p>PWR-LV-P48: 24/48 VDC for the switch system 48 VDC for PoE systems (53 to 57 VDC is recommended for PoE+/PoE++ devices)</p> <p>PWR-HV-NP: 110/220 VDC/VAC for the switch system</p> <p>PWR-LV-NP: 24/48 VDC for the switch system</p>	<p>PWR-HV-P48-A: 110/220 VDC/VAC for the switch system 48 VDC for PoE systems (53 to 57 VDC is recommended for PoE+/PoE++ devices)</p> <p>PWR-LV-P48-A: 24/48 VDC for the switch system 48 VDC for PoE systems (53 to 57 VDC is recommended for PoE+/PoE++ devices)</p>	<p>PWR-100-LV: 12/24/48 VDC</p> <p>PWR-105-HV-I: 110/220 VDC/VAC</p> <p>PWR-101-LV-BP-I: 48 VDC for PoE systems</p> <p>PWR-103-LV-VB-I: 12/24/48 VDC for PoE systems</p>	<p>230 to 240 VDC; 100 to 240 VAC, 50 to 60 Hz</p>	<p>100 to 250 VAC</p>
Warranty					
Warranty Period	5 years				
Compatibility					
Supported Products	<p>All models: MDS-G4000 Series, MDS-G4000-L3 Series, PT-G7728 Series, PT-G7828 Series</p> <p>PWR-HV-NP/PWR-LV-NP models: MDS-G4000-4XGS Series, MDS-G4000-L3-4XGS Series</p>	<p>MDS-G4000-4XGS Series, MDS-G4000-L3-4XGS Series</p>	<p>EDS-4000 Series,¹ EDS-G4000 Series¹</p>	<p>MRX-G4064 Series, MRX-Q4064 Series</p>	<p>ICS-G7748A Series, ICS-G7750A Series, ICS-G7752A Series, ICS-G7848A Series, ICS-G7850A Series, ICS-G7852A Series</p>

¹ The PWR-100 Series modules are only supported by specific EDS-4000/G4000 Series models:

- PWR-100-LV: EDS-4000/G4000 Series -LV(-T) models
- PWR-105-HV-I: EDS-4000/G4000 Series -HV(-T) models
- PWR-101-LV-BP-I: EDS-4000/G4000 Series -LVA(-T) models (support PoE)
- PWR-103-LV-VB-I: EDS-4000/G4000 Series -LVB(-T) models (support PoE)

SFP Modules

SFP-1FE Series Modules



Model Name		Fast Ethernet SFP			
		SFP-1FEMLC-T		SFP-1FESLC-T	SFP-1FELLC-T
Transceiver Type		Multi-mode		Single-mode	
Fiber Cable Type		OM1/OM2/OM3/OM4	62.5/125, 50/125 μm 800 MHz x km	G.652	G.652
Typical Distance		2 km	4 km	40 km	80 km
Wavelength	Typical (nm)	1310		1310	1550
	TX Range (nm)	1280 to 1340		1280 to 1340	1530 to 1570
	RX Range (nm)	1100 to 1650		1100 to 1600	1100 to 1600
Optical Power	TX Range (dBm)	-8 to -18		0 to -5	0 to -5
	RX Range (dBm)	-3 to -32		-3 to -34	-3 to -34
	Link Budget (dB)	14		29	29
	Dispersion Penalty (dB)	2	3	1	1

SFP-1G Copper Module



Model Name	SFP-1GTXRJ45-T
1000BaseT(X) Ports (RJ45 Connector)	1

SFP-1G Series Modules



Model Name		Gigabit Ethernet SFP								
		SFP-1GSXLC(-T)				SFP-1GLSXC(-T)				SFP-1GLXLC(-T)
Transceiver Type		Multi-mode				Multi-mode				Single-mode
Fiber Cable Type		OM1	OM2	OM3	OM4	OM1	OM2	OM3	OM4	G.652
Typical Distance		300 m	550 m	1 km	1 km	500 m/ 2 km ¹	500 m/ 1 km ¹	500 m	500 m	10 km
Wavelength	Typical (nm)	850				1310				1310
	TX Range (nm)	830 to 860				1270 to 1355				1280 to 1355
	RX Range (nm)	770 to 860				1260 to 1610				1260 to 1610
Optical Power	TX Range (dBm)	-4 to -9.5				-1 to -9				-3 to -9
	RX Range (dBm)	0 to -18				-1 to -19				-3 to -21
	Link Budget (dB)	8.5				10				12
	Dispersion Penalty (dB)	4.3	3.6	4.5	4.5	5				1

¹ SFP-1GLSXC(-T) OM1 and OM2 can only reach the listed maximum distance when using fiber cables from specific vendors. When using other fiber cables, the reach is limited to 500 m.

Model Name		Gigabit Ethernet SFP				
		SFP-1GLHLC(-T)	SFP-1GLHXC(-T)	SFP-1GZXC(-T)	SFP-1GEZXC	SFP-1GEZXC-120
Transceiver Type		Single-mode	Single-mode	Single-mode	Single-mode	Single-mode
Fiber Cable Type		G.652	G.652	G.652	G.652	G.652
Typical Distance		30 km	40 km	80 km	110 km	120 km
Wavelength	Typical (nm)	1310	1310	1550	1550	1550
	TX Range (nm)	1280 to 1355	1280 to 1340	1530 to 1570	1530 to 1570	1530 to 1570
	RX Range (nm)	1260 to 1610	1260 to 1610	1260 to 1610	1260 to 1610	1100 to 1600
Optical Power	TX Range (dBm)	-3 to -8	+3 to -4	+5 to 0	+5 to 0	+3 to -2
	RX Range (dBm)	-3 to -23	-1 to -24	-1 to -24	-9 to -30	-8 to -33
	Link Budget (dB)	15	20	24	30	31
	Dispersion Penalty (dB)	1	1	1	1	2

SFP Modules

SFP-1G WDM-type Series Modules



Model Name		WDM Gigabit Ethernet SFP					
		SFP-1G10ALC(-T)	SFP-1G10BLC(-T)	SFP-1G20ALC(-T)	SFP-1G20BLC(-T)	SFP-1G40ALC(-T)	SFP-1G40BLC(-T)
Transceiver Type		Single-mode		Single-mode		Single-mode	
Fiber Cable Type		G.652		G.652		G.652	
Typical Distance		10 km		20 km		40 km	
Wavelength	Typical (nm)	TX 1310 RX 1550	TX 1550 RX 1310	TX 1310 RX 1550	TX 1550 RX 1310	TX 1310 RX 1550	TX 1550 RX 1310
	TX Range (nm)	1270 to 1355	1530 to 1570	1270 to 1355	1530 to 1570	1290 to 1330	1530 to 1570
	RX Range (nm)	1480 to 1580	1260 to 1360	1480 to 1580	1260 to 1360	1480 to 1580	1260 to 1360
Optical Power	TX Range (dBm)	-3 to -9		-2 to -8		+2 to -3	
	RX Range (dBm)	-3 to -21		-2 to -23		-1 to -23	
	Link Budget (dB)	12		15		20	
	Dispersion Penalty (dB)	2		3		1	

SFP-2.5G Series Modules



Model Name		2.5G Ethernet SFP						
		SFP-2.5GMLC-T				SFP-2.5GSLC-T	SFP-2.5GLSLC-T	SFP-2.5GSLHLC-T
Transceiver Type		Multi-mode				Single-mode	Single-mode	Single-mode
Fiber Cable Type		OM1	OM2	OM3	OM4	G.652	G.652	G.652
Typical Distance		170 m	200 m	550 m	600 m	5 km	20 km	45 km
Wavelength	Typical (nm)	850				1310	1310	1550
	TX Range (nm)	830 to 860				1260 to 1360	1260 to 1360	1520 to 1580
	RX Range (nm)	830 to 860				1260 to 1360	1260 to 1360	1260 to 1600
Optical Power	TX Range (dBm)	-1 to -7.5				-3 to -9	0 to -5	+1 to -4
	RX Range (dBm)	0 to -13.5				-3 to -15	0 to -16	+1 to -19
	Link Budget (dB)	6				6	11	15
	Dispersion Penalty (dB)	2.5				2	1	1.5

SFP-10G Series Modules



Model Name		10G Ethernet SFP						
		SFP-10GSRLC-T				SFP-10GLRLC-T	SFP-10GERLC-T	SFP-10GZRLC-T
Transceiver Type		Multi-mode				Single-mode	Single-mode	Single-mode
Fiber Cable Type		OM1	OM2	OM3	OM4	G.652	G.652	G.652
Typical Distance		33 m	82 m	300 m	400 m	10 km	40 km	80 km
Wavelength	Typical (nm)	850				1310	1550	1550
	TX Range (nm)	840 to 860				1260 to 1355	1530 to 1565	1530 to 1565
	RX Range (nm)	840 to 860				1260 to 1355	1530 to 1565	1530 to 1565
Optical Power	TX Range (dBm)	-1 to -5				+0.5 to -8.2	+2 to -1	+4 to 0
	RX Range (dBm)	+0.5 to -9.9				+0.5 to -14.4	-1 to -15.8	-7 to -23
	Link Budget (dB)	6.8				7.4	15	23
	Dispersion Penalty (dB)	3.9				1	3	3

Mounting Kits

Wall-mounting Kits



Model Name	WK-25	WK-30	WK-35-01	WK-35-02	WK-44-01	WK-44-02	WK-45-01
Physical Characteristics							
Dimensions	43 x 25 x 2 mm (1.69 x 0.98 x 0.08 in)	40 x 30 x 1 mm (1.57 x 1.18 x 0.04 in)	35 x 44 x 2.5 mm (1.38 x 1.73 x 0.10 in)	35 x 24 x 1.2 mm (1.38 x 0.94 x 0.05 in)	44 x 57.5 x 1.6 mm (1.73 x 2.26 x 0.06 in)	44 x 35 x 2.5 mm (1.73 x 1.38 x 0.10 in)	45 x 57 x 2.5 mm (1.77 x 2.24 x 0.10 in)
Supported Products	MGate 5135/5435 Series	EDS-205A Series, EDS-G205 Series, EDS-G205A-4PoE Series, ICF-1170I Series	NPort 6450, UPort 1410, UPort 1450, UPort 1450I, AWK-1137C Series	NPort 6150/6250 Series, UPort 404/407 Series	NPort 6600-8 Series, NPort 6600-16 Series, NPort 6600-32 Series, UPort 1600-16 Series	NPort 5400 Series	NPort 5600-8 Series, NPort 5600-16 Series, NPort 5650-8-HV-T, NPort 5650-16-HV-T, CN2600-8 Series, CN2600-16 Series, CN2600-8-2AC Series, CN2600-16-2AC Series



Model Name	WK-46	WK-51-01	WK-55	WK-60-01	UC-3100 Wall-mount Kit	V2400 Isolated Wall-mount Kit	MC-1100 Wall-mount Kit
Physical Characteristics							
Dimensions	51.6 x 66.8 x 1 mm (2.03 x 2.63 x 0.04 in)	51.6 x 67 x 2 mm (2.03 x 2.63 x 0.07 in)	55 x 34 x 2.5 mm (2.16 x 1.34 x 0.10 in)	60 x 70 x 2 mm (2.36 x 2.76 x 0.08 in)	17.5 x 22 x 2.5 mm (0.69 x 0.87 x 0.98 in)	150 x 39.5 x 13.2 mm (5.91 x 1.56 x 0.52 in)	120 x 45.8 x 5 mm (4.72 x 1.80 x 0.20 in)
Supported Products	EDS-300 Series, EDS-500A Series, EDS-G308 Series, OBU-102 Series, IMC-101G/101 Series, PT-500 Series, VPort 354 Series, VPort 364A Series, VPort 461A Series, NPort S8455I-MM-SC, NPort S8455I-MM-SC-T, NPort S8455I-SS-SC, NPort S8455I-SS-SC-T, NPort S8455I-SS-SC-T, NPort S8458-4S-SC-T	AWK-4131A Series, AWK-1131A Series, EDS-510E Series, EDS-518E Series, EDS-G500E Series	AWK-4131A Series	EDS-528E Series	UC-3100 Series	V2403 Series, V2406A Series, V2416A Series, V2426A Series	MC-1100 Series



Model Name	WK-112-01	WK-75	SK-115-01
Physical Characteristics			
Dimensions	112 x 87 x 4.5 mm (4.41 x 3.43 x 0.18 in)	90 x 75 x 2.5 mm (3.54 x 2.95 x 0.1 in)	81.2 x 115.0 mm (3.20 x 4.53 in)
Supported Products	MDS-G4000 Series, MDS-G4000-4XGS Series	EDS-600 Series	NPort 6100-G2/6200-G2 Series

Mounting Kits

DIN-rail / Pole-mounting Kits



Model Name	DK-DC50131	DK-25-01	UC-3100 DIN-rail Kit	MC-1100 DIN-rail Kit
Physical Characteristics				
Dimensions	120 x 50 x 9.8 mm (4.72 x 1.97 x 0.39 in)	25 x 48.3 mm (0.98 x 1.90 in)	19.37 x 89 x 10 mm (0.76 x 3.5 x 0.39 in)	90 x 45 x 9.8 mm (3.54 x 1.77 x 0.39 in)
Package Contents	-			
Installation Kit	-			



Model Name	PK-DC2DOF	DK-115-01	DK35A	DK-UP-42A	DK-UP1400-G2	DK-UP1600-G2
Physical Characteristics						
Dimensions	-	89 x 19 x 10 mm (3.5 x 0.75 x 0.39 in)	42.5 x 10 x 19.34 mm (1.67 x 0.39 x 0.76 in)	107 x 29 mm (4.21 x 1.14 in)	88.8 x 19.37 x 10 mm (3.49 x 0.76 x 0.39 in)	94.1 x 35 x 9.5 mm (3.7 x 1.38 x 0.37 in)
Package Contents	-					
Installation Kit	3 x PK-DC2DOF components 2 x M8 screws (length: 80 mm) 1 x M8 screw (length: 90 mm) 1 x M8 nut 3 x M8 washers 3 x M8 spring washers 4 x M5 screws 4 x M5 washers 4 x M5 spring washers	-	-	-	-	-


Rack-mounting Kits




Model Name	RK-3U-02	RK-UP1600-G2
Physical Characteristics		
Dimensions	482.6 x 120 x 185 mm (19 x 4.72 x 7.28 in)	482.6 x 120 x 43.6 mm (19 x 4.72 x 1.72 in)
Supported Products	MDS-G4000 Series, MDS-G4000-4XGS Series	UPort 1400 Series, UPort 1600-G2 Series

Caps, Cables, and Connectors


Cables and Connectors




Model Name	CBL-M12(FF5P)/OPEN-100 IP67	CBL-M12D(MM4P)/RJ45-100 IP67	CBL-M23(FF6P)/OPEN-BK-100 IP67	CBL-M12DFF4PRJ45-BK-10-IP67	CBL-M12MM8PRJ45-BK-100-IP67	CBL-M12DMM4PM12DMM4P-BK-100-IP67	CBL-M12XMM8PRJ45-Y-200-IP67	CBL-M12XMM8P-Y-100-IP67
Description	A-coded M12-to-5-pin power cable with 5-pin (female) M12 connector, IP67	D-coded M12-to-RJ45 Cat-5C UTP Ethernet cable with 4-pin (male) M12 connector, IP67	M23-to-6-pin power cable with 6-pin (female) M23 connector, IP67	M12-to-RJ45 Cat-5E UTP Ethernet cable with 4-pin (female) D-coded M12 connector, IP67	M12-to-RJ45 Cat-5E UTP Ethernet cable with 8-pin (male) A-coded M12 connector, IP67	M12-to-M12 Cat-5E STP Ethernet cable with 4-pin D-coded M12 connector, IP67	M12-to-RJ45 Cat-5 UTP Ethernet cable with 8-pin (male) X-coded crimp type M12 connector, IP67	M12-to-M12 Cat-5 UTP Ethernet cable with 8-pin (male) X-coded crimp type M12 connector, IP67
Cable Length	1 m (3.3 ft)	1 m (3.3 ft)	1 m (3.3 ft)	10 cm (3.93 in)	1 m (3.3 ft)	1 m (3.3 ft)	2 m (6.6 ft)	1 m (3.3 ft)



Model Name	CBL-M12XMM8P-Y-300-IP67	CBL-M12XMM8PRJ45-BK-100-IP67	CBL-M12XMM8PRJ45-BK-200-IP67	CBL-M12FF4POPEN-150 IP67	CBL-M12FF4POPEN-300 IP67	CBL-RJ45F9-150	CBL-RJ45M9-150	CBL-F9DPF1x4-BK-100	CBL-USBAP-50
Description	M12-to-M12 Cat-5 UTP Ethernet cable with 8-pin (male) X-coded crimp type M12 connector, IP67	X-coded M12-to-RJ45 Cat-5E UTP Gigabit Ethernet cable with 8-pin (male) M12 connector, IP67	X-coded M12-to-RJ45 Cat-5E UTP Gigabit Ethernet cable with 8-pin (male) M12 connector, IP67	M12-open power cable with 4-pin A-coded (female) connector, IP67	M12-open power cable with 4-pin A-coded (female) connector, IP67	RJ45-to-DB9 (female) serial cable	RJ45-to-DB9 (male) serial cable	Console cable with 4-pin connector, 1 m	USB A (male)-to-DC jack (2.1 mm) cable, 50 cm
Cable Length	3 m (9.8 ft)	1 m (3.3 ft)	2 m (6.6 ft)	1.5 m (4.9 ft)	3 m (9.8 ft)	1.5 m (4.9 ft)	1.5 m (4.9 ft)	1 m (3.3 ft)	50 cm (1.6 ft)



Field-installable Connectors									
Model Name	A-PLG-WPM30IP67-01	A-PLG-WPRJ	M12A-5P-IP68	M12A-8PMM-IP68	M12A-8PFF-IP68	A-PLG-WPM23-01-IP67	M12D-4P-IP68	M12D-4PMM-IP67	LB-DB9F-G-01
Description	Field-installable M30 plug	Field-installable RJ-type plug	Field-installable A-coded M12 screw-in 5-pin (female) connector, IP68	Field-installable A-coded M12 screw-in 8-pin (male) connector, IP68	Field-installable A-coded M12 screw-in 8-pin (female) connector, IP68	M23 cable crimp type 6-pin (female) connector, IP67	M12 D-coded screw-in sensor (male) connector, IP68	M12 D-coded, QUICKON type, 4-pin (male) connector, IP67	Serial loopback DB9 adaptor



Field-installable Connectors							
Model Name	M12X-8PMM-IP67-HTG	M12X-8PMM-IP67	M12A-5PMM-IP68	M12A-4PFF-IP67	M12A-4PMM-IP67	M12A-5PMM-IP68	M12X-8PMM-IP65
Description	Crimp type M12 cable X-coded 8-pin (male) connector, IP67	M12 X-coded 8-pin (male) connector, IP67	M12 A-coded 5-pin (male) connector, IP68	M12 cable A-coded 4-pin (female) connector, IP67	M12 cable A-coded 4-pin (male) connector, IP67	M12 cable A-coded 5-pin (male) connector, IP68	M12 cable X-coded 8-pin (male) connector, IP65

Caps



Model Name	A-CAP-M12M-M	A-CAP-M12F-M	A-CAP-M12F-M-PP	A-CAP-N-M	A-CAP-M30M-MIP67	A-CAP-WPRJ45-MC
Description	Metal cap for M12 male connector	Metal cap for M12 female connector	Metal cap for M12 female push-pull connector	Metal cap for N-type connector	Metal cap for M30 male connector	Metal cap with chain for RJ45 connector

Serial Connection Options

Serial board connection box/cable usage chart

Serial Board Model Name	Connection Boxes						Connection Cables														
	8-port						8-port						4-port				2-port				
	OPT8-M9	OPT8-RJ45	OPT8A/B/S	OPT8-M9+	OPT8A+/B+/S+	OPT8-RJ45+	CBL-M68M25x8-100 (OPT8C+)	CBL-M68M9x8-100 (OPT8D+)	CBL-M62M25x8-100 (OPT8C)	CBL-M62M9x8-100 (OPT8D)	CBL-M78M25x8-100	CBL-M78M9x8-100	CBL-M44M9x4-50	CBL-M44M9x4-50 (POS)	CBL-M44M25x4-50	CBL-F40M25x4-50	CBL-F40M9x4-50	CBL-M25M9x2-50	CBL-F20M25x2-50	CBL-F20M9x2-50	
CP-118U/138U Series	✓	✓	✓	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-
CP-118U-I/138U-I Series	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-	-
CP-168U Series	✓	✓	✓	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-
CP-104UL Series	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	✓	✓	-	-	-	-	-
CP-104JU Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CP-134U Series	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	✓	-	-	-	-	-	-
CP-114UL Series	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	✓	-	-	-	-	-	-
CP-104EL-A Series	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	✓	-	-	-	-	-	-
CP-114EL Series	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	✓	-	-	-	-	-	-
CP-112UL Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	-
CP-132UL Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	-
CP-102U Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	-
CP-102UL Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	-
CP-102E Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	-
CP-102EL Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	-
CP-132EL Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	-
CP-116E-A	-	-	-	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-
CP-118E-A-I Series	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-
CP-138E-A-I Series	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-
CP-118EL-A	-	-	-	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-
CP-134EL-A-I Series	-	-	-	-	-	-	-	-	-	-	-	✓	-	✓	-	-	-	-	-	-	-
CP-168EL-A	-	-	-	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-
POS-104UL Series	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	-	-	-	-	-	-	-
CA-108 Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-
CB-108 Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-
CA-114 Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-
CB-114 Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-
CA-134I Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-
CB-134I Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-
CA-104 Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-	-
CA-132/132I Series	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	✓

8-port RS-232 Connection Boxes



Model Name	OPT8-M9+	OPT8-RJ45+	OPT 8A+/S+	OPT 8B+
Connector	1 x VHDCI 68			
Pin Assignment				
Board-side Connector	8 x DB9 (male)			
Device-side Connector	8 x 8-pin RJ45			
Connection Cable	VHDCI 68 to DB62 (female) 1.5 m connection cable for connecting to the serial board			
LED Interface	TxD, RxD indicators for each device-side port			
LED Indicators	-			
Physical Characteristics	-			
Dimensions	90 x 111 x 27.5 mm (3.54 x 4.37 x 1.08 in)	152.8 x 32.8 x 32 mm (6.02 x 1.29 x 1.26 in)	247 x 108 x 35 mm (9.72 x 4.25 x 1.38 in)	247 x 108 x 35 mm (9.72 x 4.25 x 1.38 in)
Surge Protection	25 kV ESD, 2 kV EFT surge protection (OPT8S+ only)			



Model Name	OPT8-M9	OPT8-RJ45	OPT8A/S	OPT 8B
Connector	1 x VHDCI 68			
Pin Assignment				
Board-side Connector	8 x DB9 (male)			
Device-side Connector	8 x 8-pin RJ45			
Connection Cable	VHDCI 68 to DB62 (female) 1.5 m connection cable for connecting to the serial board			
LED Interface	TxD, RxD indicators for each device-side port			
LED Indicators	-			
Physical Characteristics	-			
Dimensions	90 x 111 x 27.5 mm (3.54 x 4.37 x 1.08 in)	152.8 x 32.8 x 32 mm (6.02 x 1.29 x 1.26 in)	247 x 108 x 35 mm (9.72 x 4.25 x 1.38 in)	247 x 108 x 35 mm (9.72 x 4.25 x 1.38 in)
Surge Protection	25 kV ESD, 2 kV EFT surge protection (OPT8S only)			

8-port Connection Cables



Model Name	CBL-M62M25x8-100	CBL-M62M9x8-100	CBL-M68M25x8-100	CBL-M68M9x8-100	CBL-M78M25x8-100	CBL-M78M9x8-100
Connector	1 x VHDCI 68					
Board-side Connector	1 x DB62 (male)		1 x VHDCI 68		1 x DB78 (male)	
Device-side Connector	8 x DB25 (male)	8 x DB9 (male)	8 x DB25 (male)	8 x DB9 (male)	8 x DB25 (male)	8 x DB9 (male)
Physical Characteristics	-					
Cable Length	100 cm (3.3 ft)					

2-port Connection Cables



Model Name	CBL-M25M9x2-50																		
Connector	1 x DB25 (male)																		
Pin Assignment	<table border="1"> <thead> <tr> <th>PIN</th> <th>RS-232</th> </tr> </thead> <tbody> <tr><td>1</td><td>DCD</td></tr> <tr><td>2</td><td>RxD</td></tr> <tr><td>3</td><td>TxD</td></tr> <tr><td>4</td><td>DTR</td></tr> <tr><td>5</td><td>GND</td></tr> <tr><td>6</td><td>DSR</td></tr> <tr><td>7</td><td>RTS</td></tr> <tr><td>8</td><td>CTS</td></tr> </tbody> </table>	PIN	RS-232	1	DCD	2	RxD	3	TxD	4	DTR	5	GND	6	DSR	7	RTS	8	CTS
PIN	RS-232																		
1	DCD																		
2	RxD																		
3	TxD																		
4	DTR																		
5	GND																		
6	DSR																		
7	RTS																		
8	CTS																		
Board-side Connector	1 x DB25 (male)																		
Device-side Connector	2 x DB9 (male)																		
Physical Characteristics	-																		
Cable Length	50 cm (19.69 in)																		

4-port Connection Cables




Model Name	CBL-M44M9x4-50	CBL-M44M25x4-50																																																																																																				
Connector	4 x DB9 (male)	4 x DB25 (male)																																																																																																				
Pin Assignment	<table border="1"> <thead> <tr> <th>PIN</th> <th>RS-232</th> <th>RS-422</th> <th>RS-485-4w</th> <th>RS-485-2w</th> </tr> </thead> <tbody> <tr><td>1</td><td>DCD</td><td>TxD-(A)</td><td>TxD-(A)</td><td>-</td></tr> <tr><td>2</td><td>RxD</td><td>TxD+(B)</td><td>TxD+(B)</td><td>-</td></tr> <tr><td>3</td><td>TxD</td><td>RxD+(B)</td><td>RxD+(B)</td><td>Data+(B)</td></tr> <tr><td>4</td><td>DTR</td><td>RxD-(A)</td><td>RxD-(A)</td><td>Data-(A)</td></tr> <tr><td>5</td><td>GND</td><td>GND</td><td>GND</td><td>GND</td></tr> <tr><td>6</td><td>DSR</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>7</td><td>RTS</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>8</td><td>CTS</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>9</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	PIN	RS-232	RS-422	RS-485-4w	RS-485-2w	1	DCD	TxD-(A)	TxD-(A)	-	2	RxD	TxD+(B)	TxD+(B)	-	3	TxD	RxD+(B)	RxD+(B)	Data+(B)	4	DTR	RxD-(A)	RxD-(A)	Data-(A)	5	GND	GND	GND	GND	6	DSR	-	-	-	7	RTS	-	-	-	8	CTS	-	-	-	9	-	-	-	-	<table border="1"> <thead> <tr> <th>PIN</th> <th>RS-232</th> <th>RS-422</th> <th>RS-485-4w</th> <th>RS-485-2w</th> </tr> </thead> <tbody> <tr><td>2</td><td>TxD</td><td>RxD+(B)</td><td>RxD+(B)</td><td>Data+(B)</td></tr> <tr><td>3</td><td>RxD</td><td>TxD+(B)</td><td>TxD+(B)</td><td>-</td></tr> <tr><td>4</td><td>RTS</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>5</td><td>CTS</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>6</td><td>DSR</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>7</td><td>GND</td><td>GND</td><td>GND</td><td>GND</td></tr> <tr><td>8</td><td>DCD</td><td>TxD-(A)</td><td>TxD-(A)</td><td>-</td></tr> <tr><td>20</td><td>DTR</td><td>RxD-(A)</td><td>RxD-(A)</td><td>Data-(A)</td></tr> <tr><td>22</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	PIN	RS-232	RS-422	RS-485-4w	RS-485-2w	2	TxD	RxD+(B)	RxD+(B)	Data+(B)	3	RxD	TxD+(B)	TxD+(B)	-	4	RTS	-	-	-	5	CTS	-	-	-	6	DSR	-	-	-	7	GND	GND	GND	GND	8	DCD	TxD-(A)	TxD-(A)	-	20	DTR	RxD-(A)	RxD-(A)	Data-(A)	22	-	-	-	-
PIN	RS-232	RS-422	RS-485-4w	RS-485-2w																																																																																																		
1	DCD	TxD-(A)	TxD-(A)	-																																																																																																		
2	RxD	TxD+(B)	TxD+(B)	-																																																																																																		
3	TxD	RxD+(B)	RxD+(B)	Data+(B)																																																																																																		
4	DTR	RxD-(A)	RxD-(A)	Data-(A)																																																																																																		
5	GND	GND	GND	GND																																																																																																		
6	DSR	-	-	-																																																																																																		
7	RTS	-	-	-																																																																																																		
8	CTS	-	-	-																																																																																																		
9	-	-	-	-																																																																																																		
PIN	RS-232	RS-422	RS-485-4w	RS-485-2w																																																																																																		
2	TxD	RxD+(B)	RxD+(B)	Data+(B)																																																																																																		
3	RxD	TxD+(B)	TxD+(B)	-																																																																																																		
4	RTS	-	-	-																																																																																																		
5	CTS	-	-	-																																																																																																		
6	DSR	-	-	-																																																																																																		
7	GND	GND	GND	GND																																																																																																		
8	DCD	TxD-(A)	TxD-(A)	-																																																																																																		
20	DTR	RxD-(A)	RxD-(A)	Data-(A)																																																																																																		
22	-	-	-	-																																																																																																		
Board-side Connector	1 x DB44 (male)																																																																																																					
Device-side Connector	4 x DB9 (male)	4 x DB25 (male)																																																																																																				
Physical Characteristics	-																																																																																																					
Cable Length	50 cm (19.69 in)																																																																																																					

8-pin RJ45-to-DB9/DB25 Connection Cables



Model Name	CBL-RJ45F25-150	CBL-RJ45F9-150	CBL-RJ45M25-150	CBL-RJ45M9-150	CBL-RJ45SF25-150	CBL-RJ45SF9-150	CBL-RJ45SM25-150	CBL-RJ45SM9-150
Connector								
Pin Assignment								
Cable Type	-				Shielded			
Board-side Connector	1 x 8-pin RJ45							
Device-side Connector	1 x DB25 (female)	1 x DB9 (female)	1 x DB25 (male)	1 x DB9 (male)	1 x DB25 (female)	1 x DB9 (female)	1 x DB25 (male)	1 x DB9 (male)
Physical Characteristics								
Cable Length	150 cm (4.9 ft)							
Supported Products	CP-104JU, OPT8-RJ45, NPort 5210, NPort 5600, NPort 6600, CN2510/2600							

10-pin RJ45-to-DB9/DB25 Connection Cables



Model Name	CN20030	CN20040	CN20060	CN20070
Connector				
Pin Assignment				
Board-side Connector	1 x 10-pin RJ45			
Device-side Connector	1 x DB25 (female)	1 x DB25 (male)	1 x DB9 (male)	1 x DB9 (female)
Physical Characteristics				
Cable Length	150 cm (4.9 ft)			

Wiring Kits



Model Name	TB-M9	TB-F9	TB-M25	TB-F25	Mini DB9F-to-TB	ADP-RJ458P-DB9M	ADP-RJ458P-DB9F	A-ADP-RJ458P-DB9F-ABC01
Physical Characteristics								
Description	DB9 (male) DIN-rail wiring terminal	DB9 (female) DIN-rail wiring terminal	DB25 (male) DIN-rail wiring terminal	DB25 (female) DIN-rail wiring terminal	DB9 (female)-to-terminal block adapter	RJ45-to-DB9 (male) adapter	RJ45-to-DB9 (female) adapter	
Wiring	Serial cable, 24 to 12 AWG							
Input/Output Interface								
Connector	DB9 (male)	DB9 (female)	DB25 (male)	DB25 (female)	DB9 (female)	DB9 (male)	DB9 (female)	
Environmental Limits								
Operating Temperature	-40 to 105°C (-40 to 221°F)				0 to 70°C (32 to 158°F)	-15 to 70°C (5 to 158°F)		0 to 70°C (32 to 158°F)

EtherCAT Junctions



Product Series	EJS-04	EJS-08
EtherCAT		
Supported Topologies	Star, Line, Tree, Ring	
Interfaces	4 x 100BaseT(X) ports (RJ45 connector)	8 x 100BaseT(X) ports (RJ45 connector)
Switch Properties		
Port Combination	1 (IN), 3 (OUT)	1 (IN), 7 (OUT)
Port Delay	1 μs per port (approximately)	
Rotary Switch Configuration		
ID Selector	Valid address range: 1 to 4095	
Power Parameters		
Input Voltage	12/24/48 VDC	
Physical Characteristics		
Housing	Metal	
Installation	DIN-rail mounting, Wall mounting (with optional kit)	
Environmental Limits		
Operating Temperature	Standard models: -10 to 60°C (14 to 140°F) Wide temp. models: -35 to 75°C (-31 to 167°F)	
Standards and Certifications		
Safety	UL 61010-2-201, EN 62368-1	
EMC	EN 55032/35, EN 61000-6-2/-6-4	
EMI	CISPR 22/32, FCC Part 15B Class A	

Surge Protectors



Product Series	ISD-1110-T	ISD-1130-T	ISD-1210-T	ISD-1230-T
Serial Interface				
Connector	DB9 male	Terminal block		
Serial Standards	RS-232	RS-422, RS-485	RS-232	RS-422, RS-485
Baudrate	50 bps to 921.6 kbps			
Serial Signals				
RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND	–	TxD, RxD, RTS, CTS, GND	–
RS-422	–	Tx+, Tx-, Rx+, Rx-, GND	–	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	–	Tx+, Tx-, Rx+, Rx-, GND	–	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	–	Data+, Data-, GND	–	Data+, Data-, GND
Physical Characteristics				
Housing	Plastic		Metal	
IP Rating	IP30			
Dimensions	53 x 37 x 20.6 mm (2.01 x 1.46 x 0.81 in)		95 x 53 x 25 mm (3.74 x 2.01 x 0.98 in)	
Installation	Desktop		DIN-rail mounting	
Environmental Limits				
Operating Temperature	-40 to 85°C (-40 to 185°F)			
Standards and Certifications				
EMS	IEC 61000-4-5 Surge: Signal: 4 kV		IEC 61643-21 C2 20 kV	
Environmental Testing	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-3			
Safety	EN 60950-1, IEC 60950-1			
Vibration	IEC 60068-2-6			


Other Accessories

Model Name	Description
ANT-GPS-OSM-05-3M	1572 MHz, active GPS antenna, 26 dBi, for GPS applications, 3 m
DA-720 HDD Kit	DA-720 HDD/SSD kit
DE-2-SATA	2 x 2.5" SATA III SSD/HDD socket module

Every effort is made to ensure that the information in this guide is accurate. However, please note that no guarantee or legal contract is implied with the presentation of this information. This guide is intended for informational purposes only, and Moxa reserves the right to update or modify this information at any time.

> The latest product information can be found here: www.moxa.com/product

Secure Serial-to-Ethernet for the Needs of Today and Tomorrow

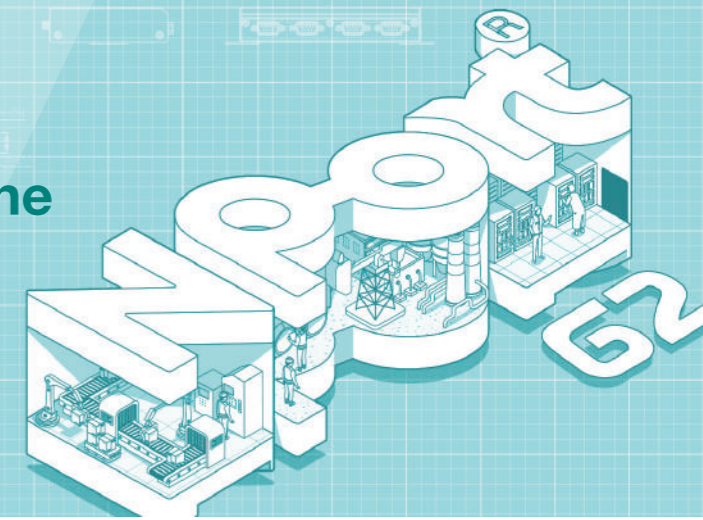

Legendary Reliability, Fortified With IEC 62443-4-2 Security

Upgrade your edge with the NPort 6000-G2 Series secure terminal servers for advanced security and the NPort IA5000-G2 Series industrial device servers for harsh industrial environments to ensure your serial devices stay connected and protected against cyberthreats.

Scan the QR code for more information about our secure serial device server offerings.

Moxa's Second-gen Serial Device Servers



NPort 6000-G2 Series
Secure Terminal Servers




NPort IA5000-G2 Series
Industrial Device Servers



Visit
Our NPort G2 Microsite

Easy and Secure Protocol Conversion

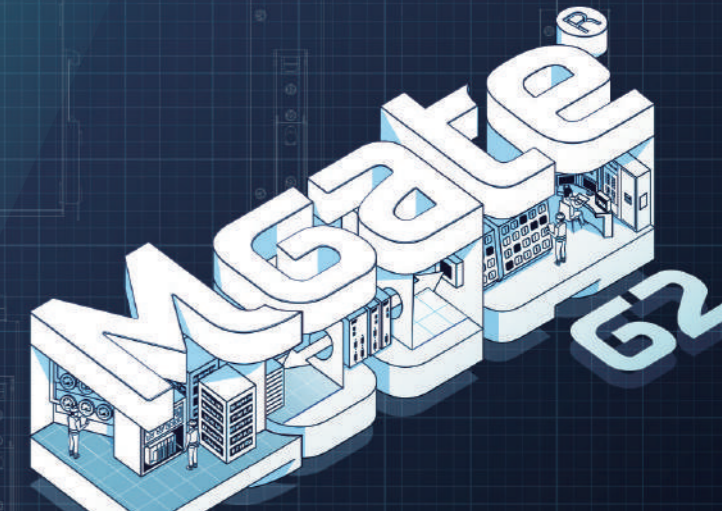

Robust Security, Easy Configuration

The MGate MB3x70-G2 Series advance Modbus gateways convert and safeguard your critical data with enhanced security upgrades and simplified configuration via an intuitive web-based GUI—all in a rugged device built to perform in industrial environments.

Scan the QR code for more information about our easy-to-use protocol gateway offerings.

Moxa's Second-gen Protocol Gateways



MGate MB3x70-G2 Series
Advanced Modbus Gateways



Visit
Our MGate G2 Microsite