


# MPC-2260 Series

26-inch ECDIS color calibrated, fanless panel computers

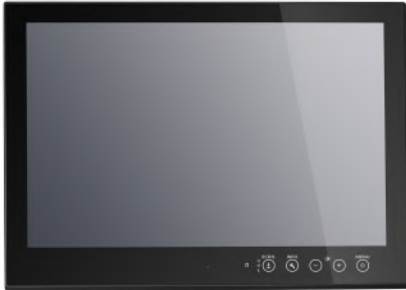

## Features and Benefits

- 26-inch panel computer
- Color calibrated for ECDIS compliance
- Third-generation Intel® processor (Intel® Core i7 3517UE 1.7 GHz or Celeron® 1047UE, 1.40 GHz)
- SavvyTouch display controls
- Fanless system design
- Built-in NMEA 0183 and 3-in-1 software selectable RS-232/422/485 interfaces
- Multiple power supplies (AC & DC)

## Certifications




## Introduction

MPC-2260 Series panel computers feature an Intel third-generation processor and 4 GB of system memory to deliver a reliable, high-performance platform of wide versatility for use in industrial marine environments. With its RS-232/422/485 serial, NMEA 0183, and Gigabit Ethernet ports, the MPC-2260 Series panel computer supports a wide variety of serial and marine-specific interfaces as well as high-speed IT communications, all with native network redundancy.

The MPC-2260 Series comes with a range of standard display enhancements useful in industrial environments (including 0 to 100% full range dimming, 178°/178° wide viewing angles, and optional optical bonding), as well as Moxa's innovative SavvyTouch display controls.

The MPC-2260 Series of panel computers are compliant with several industrial marine standards, including IEC 60945 4th, IEC 61174, IEC 61162, DNV2.4, and IACS E10, verifying their resilient durability in marine operations. An optional IP65-rated unibody shell provides strong additional protection against the harsh conditions found in marine environments. The MPC-2260 delivers a rugged, type-approved, high-performance and user-friendly panel computer perfect for ECDIS navigation systems and other marine IBS applications.

## Appearance

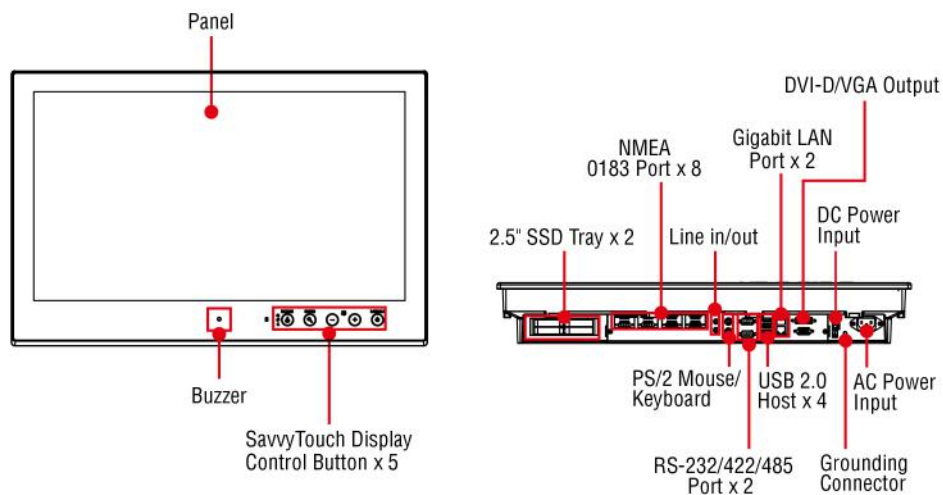

## Specifications

### Computer

CPU	MPC-2260X: Intel® Celeron® Processor 1047UE (2M Cache, 1.40 GHz) MPC-2267X: Intel® Core™ i7-3555LE Processor (4M Cache, up to 3.20 GHz)
System Chipset	Mobile Intel® HM65 Express Chipset
Graphics Controller	Intel® HD Graphics 520 (integrated)
System Memory Pre-installed	4 GB DDR3/DDR3L
System Memory Slot	SODIMM DDR3/DDR3L slot x 1
Pre-installed OS	OS is not pre-installed
Supported OS	Windows 7 Pro for Embedded Systems Windows Embedded Standard 7 (WS7P) 64-bit Windows 10 Pro 64-bit Windows 10 Embedded IOT Ent 2016 LTSB High End EPKEA Windows 10 Embedded IOT Ent 2016 LTSB Value EPKEA
Storage Slot	2.5-inch HDD/SSD slots x 2

### Computer Interface

Ethernet Ports	Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) x 2
Serial Ports	RS-232/422/485 ports x 2, software selectable (DB9 male)
USB 2.0	USB 2.0 hosts x 4, type-A connectors
Audio Input/Output	Line in x 1, Line out x 1, 3.5 mm phone jack
PS/2	Keyboard PS/2 x 1, Mouse PS/2 x 1
Video Output	DVI-D x 1, 29-pin DVI-D connectors (female) VGA x 1, 15-pin D-sub connector (female)
NMEA Port	NMEA 0183 ports x 8 (terminal block)

### LED Indicators

System	Power x 1
LAN	2 per port (10/100/1000 Mbps)

### Display

Active Display Area	550.08 (H) x 343.8 (V) mm
Aspect Ratio	16:10
Contrast Ratio	1,500:1
Light Intensity (Brightness)	300 cd/m <sup>2</sup>
Max. No. of Colors	16.7M (8-bit/color)
Panel Size	26-inch viewable image
Panel Type	MVA
Pixel Pitch (RGB)	0.2865 (H) x 0.2865 (V) mm
Pixels	1920 x 1200

Response Time	15 ms (gray to gray)
Viewing Angles	176°/176°
<b>Serial Interface</b>	
Baudrate	50 bps to 115.2 kbps
Data Bits	5, 6, 7, 8
Flow Control	RTS/CTS, XON/XOFF, ADDC® (automatic data direction control) for RS-485, RTS Toggle (RS-232 only)
Parity	None, Even, Odd, Space, Mark
Stop Bits	1, 1.5, 2
NMEA Interface	<p>Serial Standards:  NMEA 0183: RS-422  NMEA 2000: CAN bus (available on request)  Baudrate: 4800 bps  Data Bits: 8  Handshake: None  Optical Isolation Protection: 3 kV  Parity: None</p> <p>Serial Standards: NMEA 0183v2 (NMEA 2000 available on request)  Stop Bits: 1, 1.5, 2  Voltage Differential: -6 V to +6 V (maximal differential level)</p>
<b>Serial Signals</b>	
RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
<b>Power Parameters</b>	
Input Voltage	100 to 240 VAC, 18 to 34 VDC
<b>Physical Characteristics</b>	
Housing	Metal
IP Rating	IP54, front IP20, rear
Dimensions	621 x 444 x 90 mm (24.45 x 17.48 x 3.57 in)
Weight	16,600 g (36.60 lb)
<b>Environmental Limits</b>	
Operating Temperature	-15 to 55°C (5 to 131°F)
Storage Temperature (package included)	-20 to 60°C (-4 to 140°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
<b>Standards and Certifications</b>	
EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m

	IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V
Environmental Testing	IEC 60068-2-1, DNVGL-CG-0339 IEC 60068-2-2, DNVGL-CG-0339 IEC 60068-2-2, IEC 60945 IEC 60068-2-30, IEC 60945
Maritime	ABS, CCS, DNV-GL
Safety	EN 60950-1, IEC 60950-1, UL 60950-1
Vibration	IEC 60068-2-6, IEC 60945 IEC 60068-2-64, DNVGL-CG-0339

## Warranty


Warranty Period	LCD: 1 year System: 3 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>

## Package Contents

Device	1 x MPC-2260 Series computer
Installation Kit	2 x storage key 1 x terminal block, 2-pin 4 x terminal block, 5-pin
Documentation	1 x document and software CD 1 x quick installation guide 1 x warranty card

## Dimensions

Unit: mm (inch)

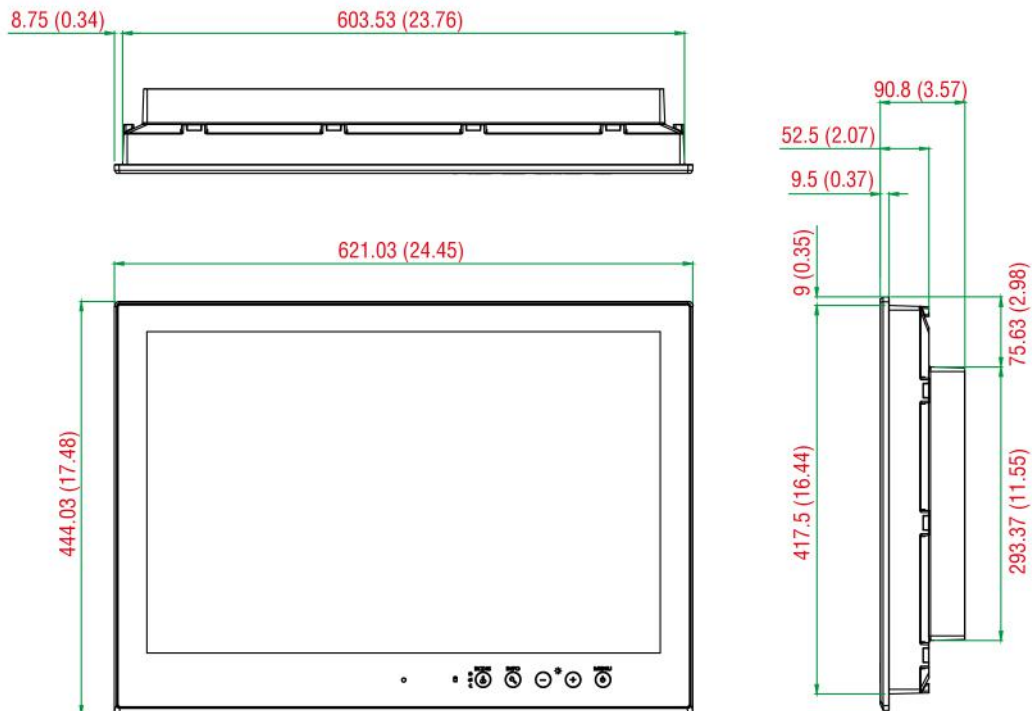

## Ordering Information

Model Name	Size	CPU	RAM	LAN	Serial	NMEA 0183	Video Outputs	Audio	Power Input
MPC-2260X	26" (16:10)	Celeron 1047UE	4 GB	2	2	8	1 x VGA 1 x DVI-D	1	24 VDC 100-240 VAC
MPC-2267X	26" (16:10)	i7-3517UE	4 GB	2	2	8	1 x VGA 1 x DVI-D	1	24 VDC 100-240 VAC

## Accessories (sold separately)

### Desktop Mounting Kits

MPC-MD-2-24-26-DMTK w/ hinge	Desktop-mounting kit for 24/26-inch panels
MPC-MD-2-24-26-DMTK w/o hinge	Desktop-mounting kit for 24/26-inch panels, (no hinge)

### VESA Mounting Kits

MPC-MD-2-26-VESAMTK	VESA kit for 26-inch panels (can be used with 200 x 100 mm or 280 x 150 mm VESA mounts)
---------------------	---

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.